

SPDT High Isolation CATV Switch 5 – 1000 MHz

Rev V1

Features

- 75 Ohm Impedance
- Input Terminated
- Positive Voltage Control
- High Isolation: 65 dB at 870 MHz
- 0.5 micron GaAs PHEMT Process
- Lead-Free 4 mm 20-Lead PQFN Package
- 100% Matte Tin Plating over Copper
- Halogen-Free “Green” Mold Compound
- RoHS* Compliant and 260°C Reflow Compatible

Description

M/A-COM's MASWSS0103 is a GaAs PHEMT MMIC single pole double throw (SPDT) switch in a lead-free 4 mm 20-lead PQFN package. The MASWSS0103 is ideally suited for applications where low control voltage, high isolation, small size and low cost are required.

Typical applications are to replace mechanical relays in CATV systems. This part can be used in all 75 Ω systems operating up to 1 GHz.


The MASWSS0103 is fabricated using a 0.5 micron gate length GaAs PHEMT process. The process features full passivation for performance and reliability.

Ordering Information

| Part Number | Package |
|-------------------|---|
| MASWSS0103TR-3000 | 13 inch, 3000 piece reel |
| MASWSS0103SMB | Sample Test Board (Includes 5 Samples) |

1: Reference Application Note M513 for reel size information.

Functional Schematic

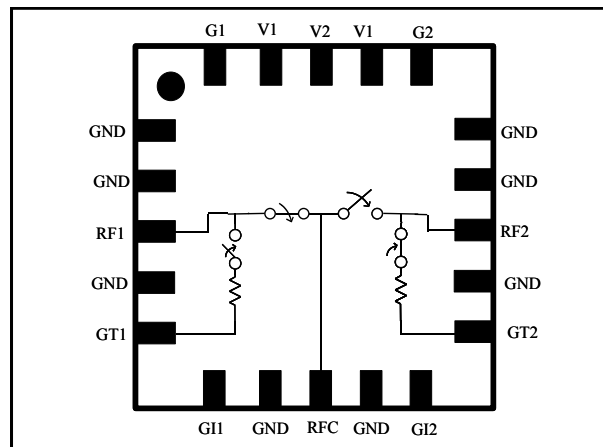

Pin Configuration ¹

| Pin No. | Pin Name | Description |
|---------|----------|----------------|
| 1 | GND | Ground |
| 2 | GND | Ground |
| 3 | RF1 | RF Port 1 |
| 4 | GND | Ground |
| 5 | GT1 | RF Ground |
| 6 | GI1 | RF Ground |
| 7 | GND | Ground |
| 8 | RFC | RF Common Port |
| 9 | GND | Ground |
| 10 | GI2 | RF Ground |
| 11 | GT2 | RF Ground |
| 12 | GND | Ground |
| 13 | RF2 | RF Port 2 |
| 14 | GND | Ground |
| 15 | GND | Ground |
| 16 | G2 | RF Ground |
| 17 | V1 | Control 1 |
| 18 | V2 | Control 2 |
| 19 | V1 | Control 1 |
| 20 | G1 | RF Ground |

1. The exposed pad centered on the package bottom must be connected to RF and DC ground.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

SPDT High Isolation CATV Switch 5 – 1000 MHz

Rev V1

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega^2$, $V_C = 0 \text{ V} / 2.9 \text{ V}$, $P_{IN} = 10 \text{ dBm}$

| Parameter | Test Conditions | Units | Min. | Typ. | Max. |
|-------------------|---|---------------|------|------|------|
| Insertion Loss | 5 - 50 MHz | dB | — | 0.75 | — |
| | 50 - 1000 MHz | dB | — | 1.0 | 1.2 |
| Isolation | 5 - 50 MHz | dB | — | 100 | — |
| | 50 - 1000 MHz | dB | 60 | 63 | — |
| Return Loss (On) | 5 - 50 MHz | dB | — | 28 | — |
| | 50 - 1000 MHz | dB | — | 16 | — |
| Return Loss (Off) | 5 - 50 MHz | dB | — | 26 | — |
| | 50 - 1000 MHz | dB | — | 16 | — |
| IP3 | Two Tone, +15 dBm/tone, 6 MHz spacing, > 50 MHz $V_C = 0 \text{ V} / 2.9 \text{ V}$ $V_C = 0 \text{ V} / 5.0 \text{ V}$ | dBm | — | 47 | — |
| | | dBm | — | 52 | — |
| Trise, Tfall | 10% to 90% RF, 90% to 10% RF | nS | — | 8 | — |
| Ton, Toff | 50% control to 90% RF, 50% control to 10% RF | nS | — | 18 | — |
| Transients | In Band | mV | — | 70 | — |
| Control Current | $ V_C = 2.9 \text{ V}$ | μA | — | 5 | 10 |

2. External 0.01 μF DC blocking capacitors are required on all RF In/Out and RF ground ports. See Application Schematic.

Absolute Maximum Ratings^{3,4}

| Parameter | Absolute Maximum |
|--|------------------|
| Input Power (5 - 1000 MHz, 2.9 V Control) | +32 dBm |
| Operating Voltage | +8.5 volts |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -65°C to +150°C |


- Exceeding any one or combination of these limits may cause permanent damage.
- M/A-COM does not recommend sustained operation near these survivability limits.

Truth Table⁵

| V1 | V2 | RFC - RF1 | RFC - RF2 |
|----|----|-----------|-----------|
| 1 | 0 | On | Off |
| 0 | 1 | Off | On |

5. 1 = +2.9 to +5 V, 0 = 0 \pm 0.2 V.

Application Schematic

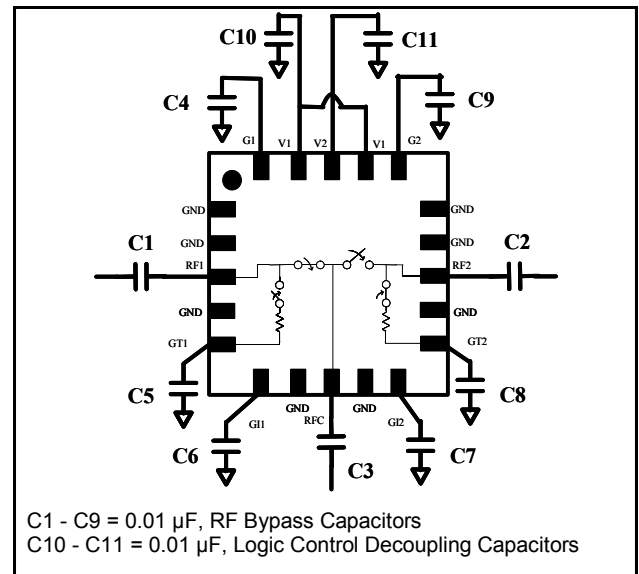


SPDT High Isolation CATV Switch 5 – 1000 MHz


Rev V1

Typical Performance Curves


Insertion Loss

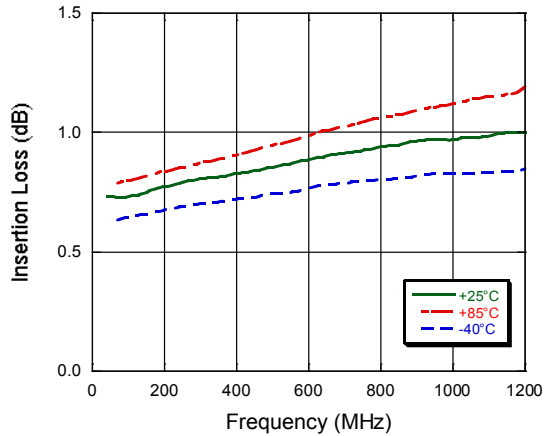


RF1 Isolation

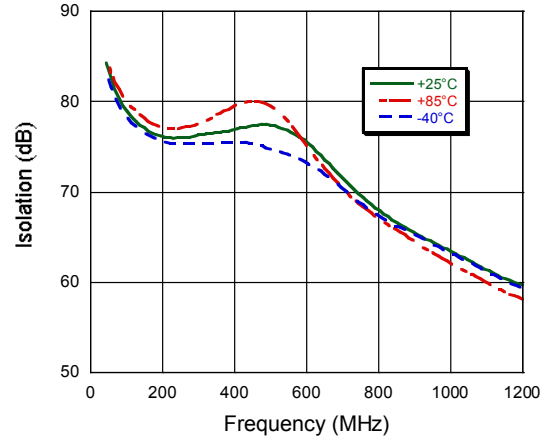


RF2 Isolation

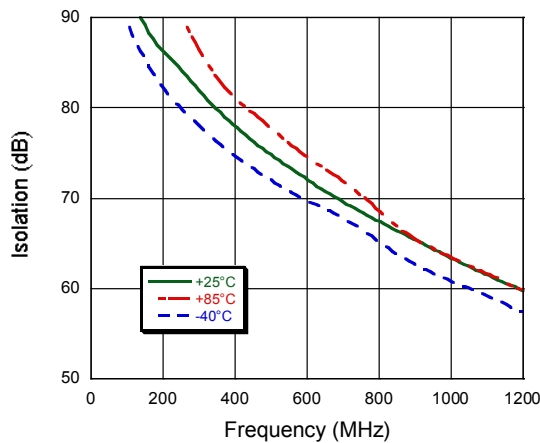

On Return Loss

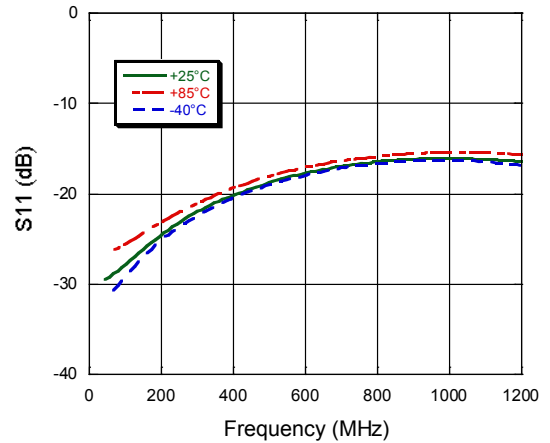

Off Return Loss

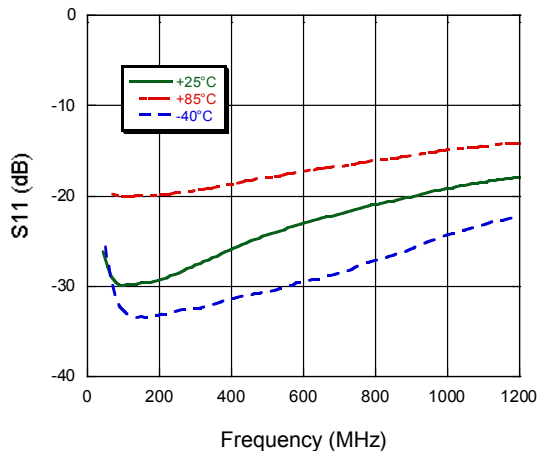

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.