


Features


- Surface mount
- 4:1 Impedance ratio
- Can be used in both 50Ω and 75Ω systems
- RoHS* compliant and lead-free
- RoHS version of the MABAES0031
- Available on tape and reel.

Description

MABA-009298-CT48A0 is a 4:1 RF flux coupled step up transformer in a low cost, surface mount package. Ideally suited for high volume CATV/ Broadband applications.



Schematic



Ordering information

Part number	Description
MABA-009298-CT48A0	2000 piece reel
MABA-009298-CT48TB	Customer Test Board

Note: Reference Application Note **M513** for reel size information.

Pin configuration

Pin No.	Function
1	Secondary (output 2)
2	Centre Tap (ground)
3	Secondary Dot (output 1)
4	Primary (Input)
5	Primary Dot (Ground)

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

Transformer, 4:1 Flux Coupled Balun Transformer 1 to 650 MHz

Rev. V2


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$

Parameter	Test Conditions	Units	Min	Typ	Max
Insertion Loss 1 (pin4 - pin3)	1 - 10 MHz	dB	—	1.43	3.6
	10 - 250 MHz			1.12	1.6
	250 - 520 MHz			1.49	2.5
	520 - 650 MHz			2.23	3.9
Insertion Loss 2 (pin4 - pin1)	1 - 10 MHz	dB	—	1.44	3.6
	10 - 250 MHz			1.14	1.6
	250 - 450 MHz			1.55	2.5
	450 - 650 MHz			2.43	3.9
Input Return Loss	1 - 10 MHz	dB	5	14.6	—
	10 - 170 MHz		14	18.8	
	170 - 320 MHz		10	14.1	
	320 - 650 MHz		4	8.4	
Amplitude Unbalance (Nominal 0dB)	1 - 300 MHz	dB	—	0.03	± 0.2
	300 - 650 MHz			0.24	± 0.8
Phase Unbalance (Nominal 180°)	1 - 100 MHz	°	—	0.34	± 2
	100 - 400 MHz			1.25	± 5
	400 - 600 MHz			0.79	± 15
	600 - 650 MHz			2.91	± 20

Absolute maximum ratings

Parameter	Absolute maximum
Max input power	250 mW
DC current	200 mA
Operating Temperature	-40°C to $+85^\circ\text{C}$
Storage Temperature	-40°C to $+85^\circ\text{C}$


Case style: SM-138

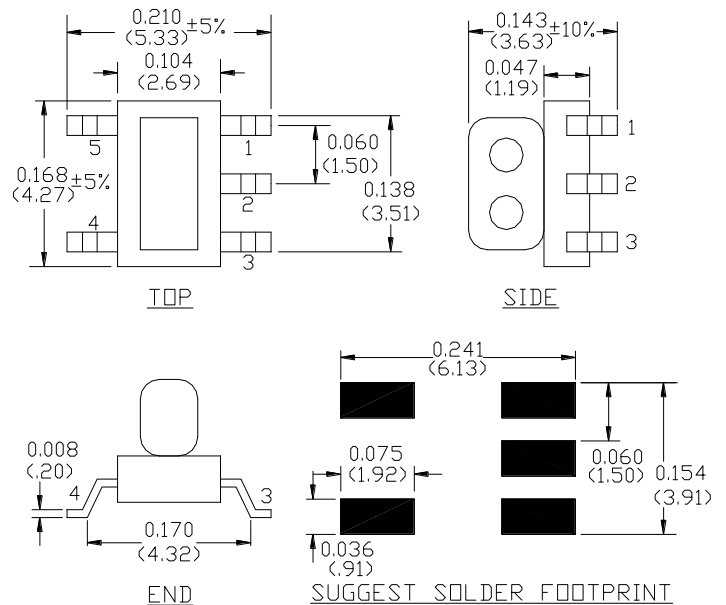


Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010, Unless otherwise stated

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$


Insertion Loss 1: through pin 4 to pin 3

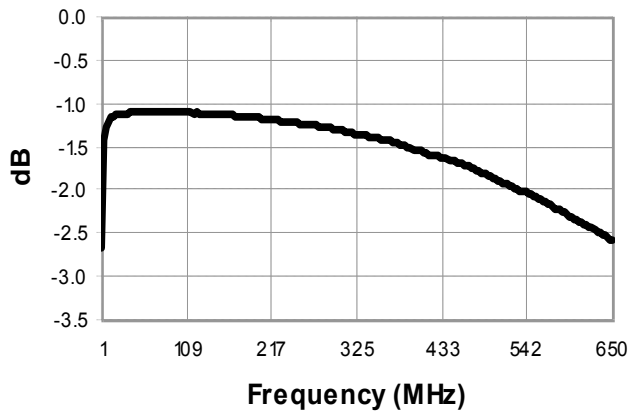


Insertion Loss 2: coupled pin 4 to pin 1

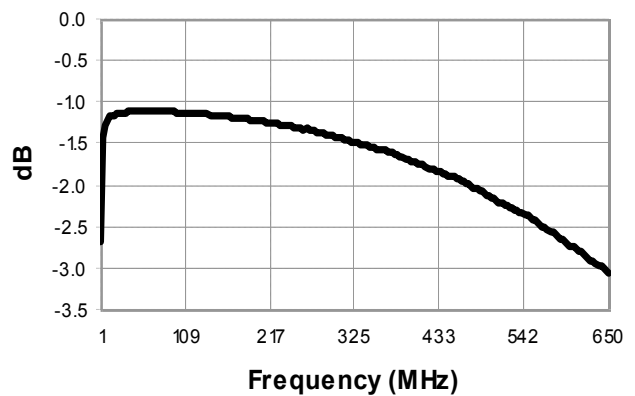


Amplitude Balance

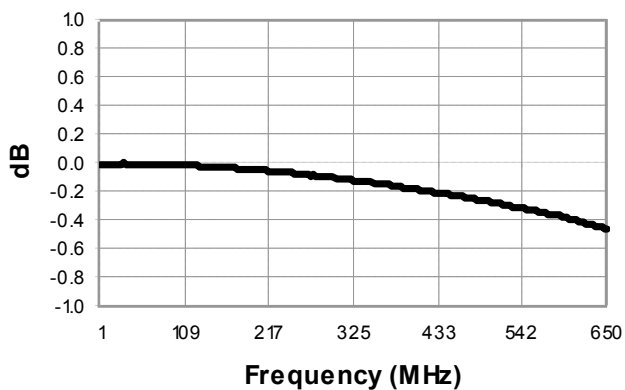

Phase Balance

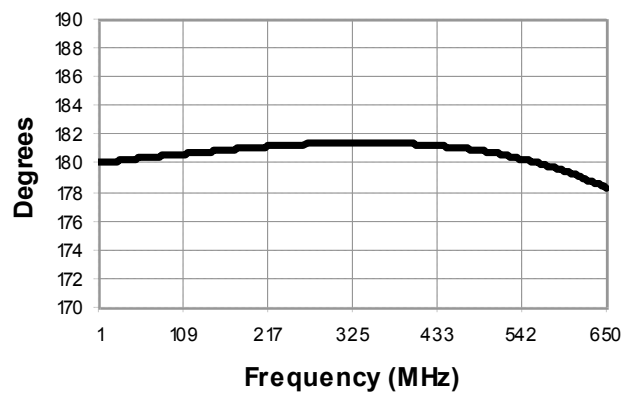

Input Return Loss

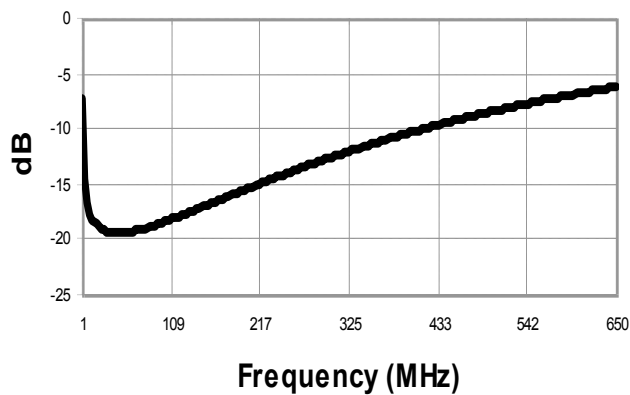

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.