

## Features

- Attenuation: 0.5 dB Steps to 15.5 dB
- Minimal Phase Variation over Attenuation Range
- Low DC Power Consumption
- Small Footprint, PQFN Package
- Integral TTL Driver
- 50 ohm Impedance
- Test Boards are Available
- RoHS\* Compliant

## Description

MACOM's MAAD-009170-000100 is a GaAs pHEMT 5-bit digital attenuator with integral TTL driver in an PQFN plastic surface mount package. Step size is 0.5 dB providing a 15.5 dB total attenuation range. This design has been optimized to minimize phase variation over the attenuation range. MAAD-009170-000100 is ideally suited for use where accuracy, fast switching, very low power consumption and low intermodulation products are required. Typical applications include dynamic range setting in precision receiver circuits and other gain/leveling control circuits.


## Ordering Information

Part Number	Package
MAAD-009170-000100	Bulk Packaging
MAAD-009170-0001TR	1000 piece reel
MAAD-009170-0001TB	Sample Test Board

Note: Reference Application Note M513 for reel size information.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Functional Schematic

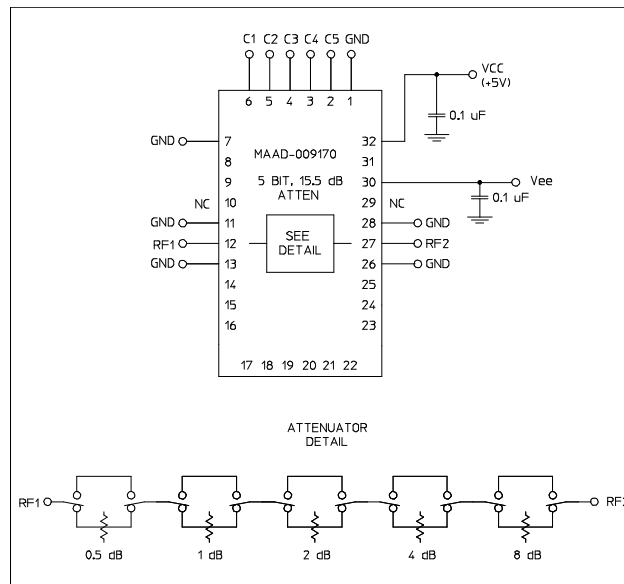

## Pin Configuration<sup>1</sup>

Pin No.	Function	Pin No.	Function
1	GND	17	NC
2	C5	18	NC
3	C4	19	NC
4	C3	20	NC
5	C2	21	NC
6	C1	22	NC
7	GND	23	NC
8	NC	24	NC
9	NC	25	NC
10	NC <sup>2</sup>	26	GND
11	GND	27	RF2
12	RF1	28	GND
13	GND	29	NC <sup>2</sup>
14	NC	30	Vee
15	NC	31	NC
16	NC	32	+Vcc

1. The exposed pad centered on the package bottom must be connected to RF and DC ground. (For PQFN Packages)
2. Pins 10 & 29 must be isolated

## Digital Attenuator, Constant Phase 15.5 dB, 5-Bit, TTL Driver, DC - 4.0 GHz

Rev. V2

**Electrical Specifications:  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\Omega$ ,  $V_{CC} = +5.0\text{V}$ ,  $V_{EE} = -5.0\text{V}$**

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Operating Power <sup>3</sup>	—	—	dBm	—	—	+20
Reference Insertion Loss	—	DC - 2.0 GHz 2.0 - 4.0 GHz	dB dB	— —	— —	4.7 5.2
Attenuation Accuracy <sup>4</sup> Relative to Reference Loss State	Any Single Bit Any Combination of Bits	DC - 4.0 GHz DC - 4.0 GHz	±(0.25 +2% of atten setting in dB) ±(0.25 +2% of atten setting in dB)			
Phase Accuracy Relative to Reference Loss State	Any Single Bit	DC - 2.0 GHz	deg	—	—	±2°
	Any Single Bit	2.0 - 4.0 GHz	deg	—	—	±3°
	Any Combination of Bits	DC - 2.0 GHz	deg	—	—	±4°
	Any Combination of Bits	2.0 - 4.0 GHz	deg	—	—	±7°
VSWR	Full Range	DC - 4.0 GHz	Ratio	—	—	1.9:1
Switching Speed	Ton	1.3 V Cntl to 90% RF	ns	—	47	—
	Toff	1.3 V Cntl to 10% RF	ns	—	24	—
	Trise	10% RF to 90% RF	ns	—	23	—
	Tfall	90% RF to 10% RF	ns	—	13	—
1 dB Compression <sup>5</sup>	Reference State	0.05 GHz	dBm	—	>+26	—
	Reference State	0.5 - 4.0 GHz	dBm	—	>+26	—
Input IP3	Two-tone inputs up to +5 dBm	0.05-4.0 GHz	dBm	—	+43 +40	—
Input IP2	Two-tone inputs up to +5 dBm	0.05-4.0 GHz	dBm	—	+50 +72	—
Vcc	—	—	V	4.5	5.0	5.5
Vee	—	—	V	-8.0	-5.0	-4.5
V <sub>IL</sub> V <sub>IH</sub>	LOW-level input voltage	—	V	0.0	0.0	0.8
	HIGH-level input voltage	—	V	2.0	5.0	5.0
I <sub>in</sub> (Input Leakage Current)	V <sub>in</sub> = V <sub>CC</sub> or GND	—	uA	-1	—	1
I <sub>cc</sub> (Quiescent Supply Current)	V <sub>cntrl</sub> = V <sub>CC</sub> or GND	—	uA	—	250	400
ΔI <sub>cc</sub> (Additional Supply Current Per TTL Input Pin)	V <sub>CC</sub> = Max V <sub>cntrl</sub> = V <sub>CC</sub> - 2.1 V	—	mA	—	—	1.5
I <sub>EE</sub>	V <sub>EE</sub> min to max V <sub>in</sub> = V <sub>IL</sub> or V <sub>IH</sub>	—	mA	-1.0	-0.2	—
Thermal Resistance θ <sub>jc</sub>	—	—	°C/W	—	35	—

- Maximum operating power is specified with the input applied to RF1. If the input is applied to RF2, then maximum operating power is +16 dBm.
- This attenuator is guaranteed monotonic.
- 1 dB Compression was measured up to +26 dBm, which is the absolute maximum rating for this device.

## Digital Attenuator, Constant Phase 15.5 dB, 5-Bit, TTL Driver, DC - 4.0 GHz


Rev. V2

### Absolute Maximum Ratings <sup>6,7</sup>

Parameter	Absolute Maximum
Max. Input Power <sup>8</sup> DC - 4.0 GHz	+26 dBm
V <sub>CC</sub>	-0.5V ≤ V <sub>CC</sub> ≤ +7.0V
V <sub>EE</sub>	-8.5V ≤ V <sub>EE</sub> ≤ +0.5V
V <sub>CC</sub> - V <sub>EE</sub>	-0.5V ≤ V <sub>CC</sub> - V <sub>EE</sub> ≤ 14.5V
V <sub>in</sub> <sup>9</sup>	-0.5V ≤ V <sub>in</sub> ≤ V <sub>CC</sub> + 0.5V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.
- The maximum operating power is specified with the input applied to RF1. If the input is applied to RF2, then maximum operating power is +22 dBm
- Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.

### Recommended PCB Configuration <sup>10</sup>

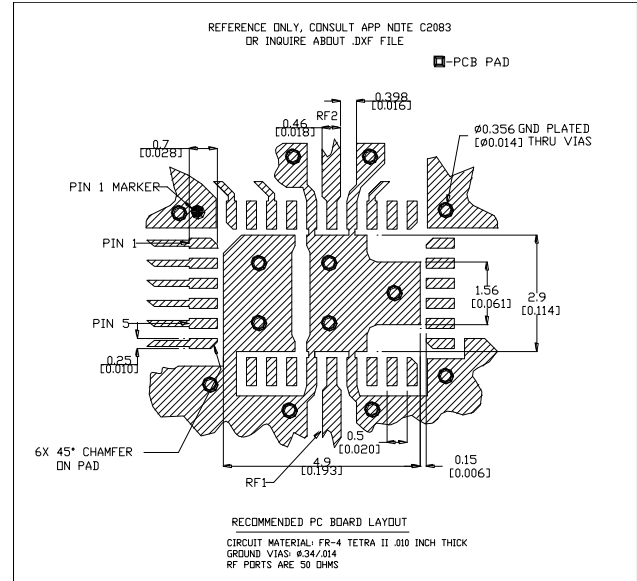

- Application Note S2083 is available on line at [www.macom.com](http://www.macom.com)

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

### Moisture Sensitivity

The MSL rating for this part is defined as Level 2 per IPC/JEDEC J-STD-020. Parts shall be stored and/or baked as required for MSL Level 2 parts.


### Truth Table (Digital Attenuator)

C5	C4	C3	C2	C1	Attenuation
0	0	0	0	0	Loss, Reference
0	0	0	0	1	0.5 dB
0	0	0	1	0	1.0 dB
0	0	1	0	0	2.0 dB
0	1	0	0	0	4.0 dB
1	0	0	0	0	8.0 dB
1	1	1	1	1	15.5 dB


0 = TTL Low; 1 = TTL High

## Typical Performance Curves


*Reference Loss vs. Frequency*

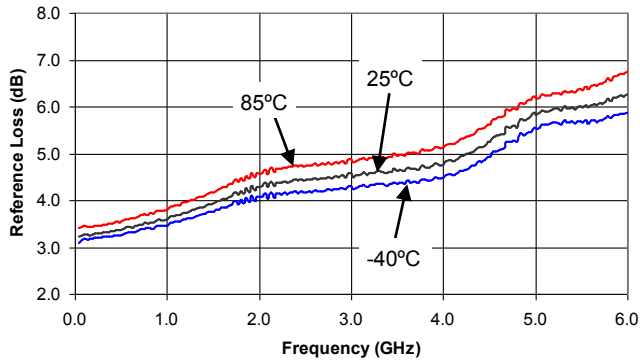


*Attenuation - 0.5 dB Bit vs. Frequency*

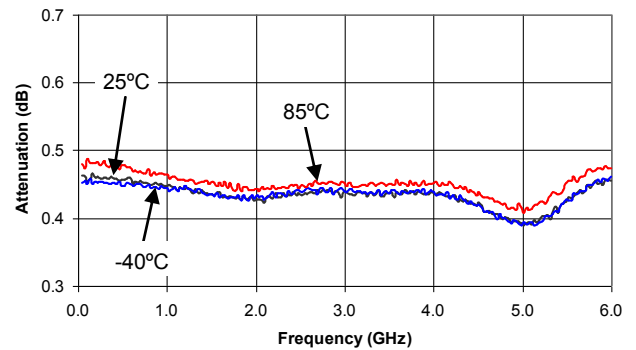


*Attenuation - 1 dB Bit vs. Frequency*

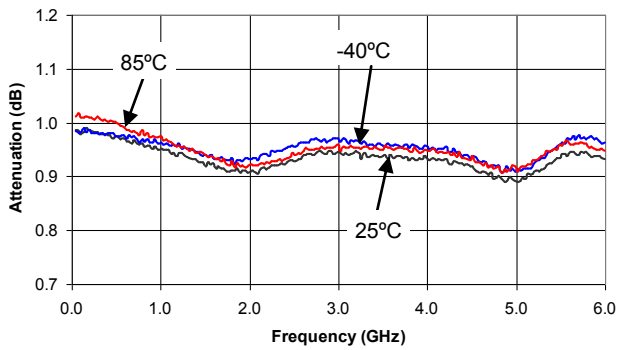


*Attenuation - 2 dB Bit vs. Frequency*

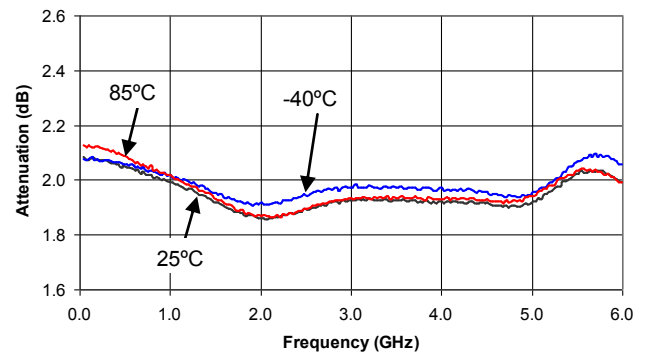

*Attenuation - 4 dB Bit vs. Frequency*

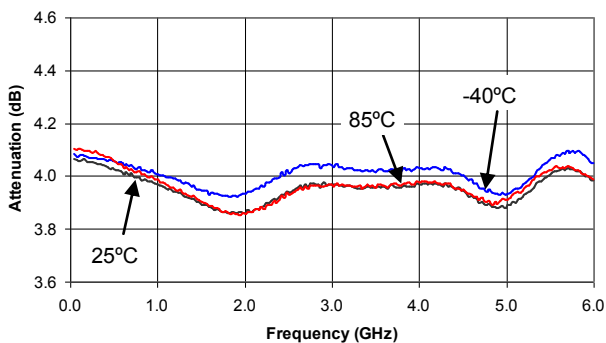


*Attenuation - 8 dB Bit vs. Frequency*

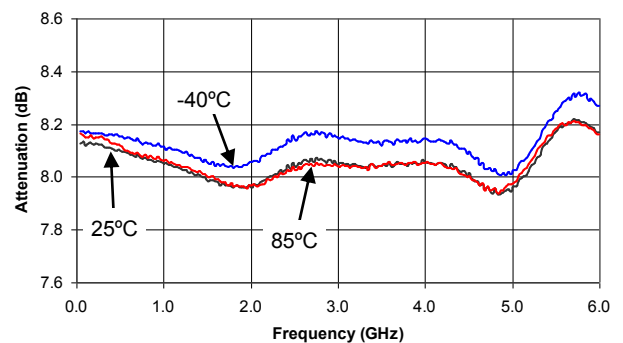


## Typical Performance Curves


Attenuation - 15.5 dB Attenuation vs. Frequency

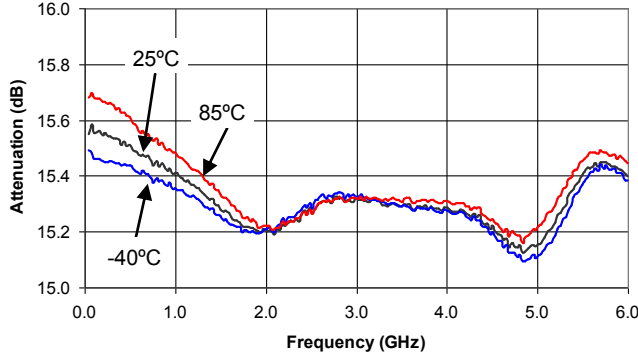


Phase - 0.5 dB Bit vs. Frequency  
Relative to Reference Loss State

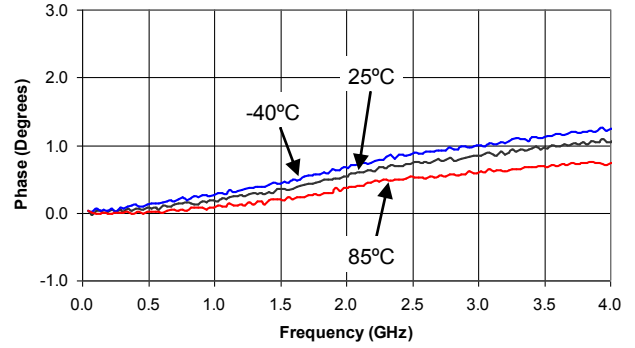


Phase - 1 dB Bit vs. Frequency  
Relative to Reference Loss State

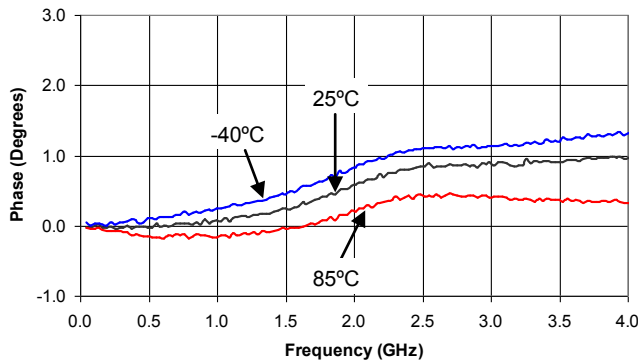


Phase - 2 dB Bit vs. Frequency  
Relative to Reference Loss State

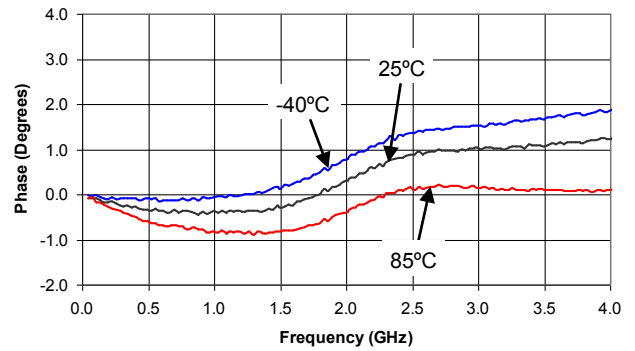

Phase - 4 dB Bit vs. Frequency  
Relative to Reference Loss State

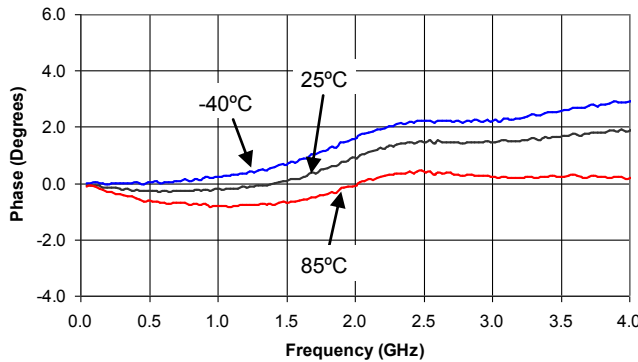


Phase - 8 dB Bit vs. Frequency  
Relative to Reference Loss State

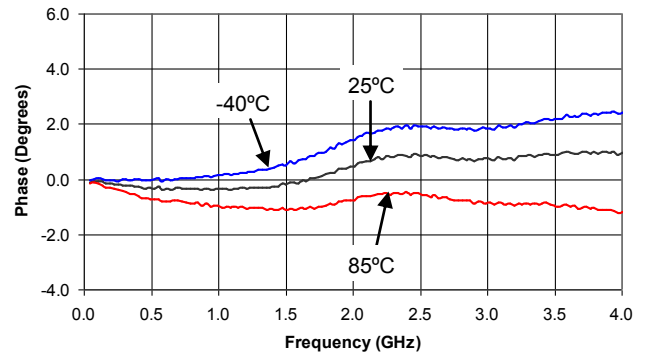


## Typical Performance Curves


**Phase - 15.5 dB Attenuation vs. Frequency**  
**Relative to Reference Loss State**

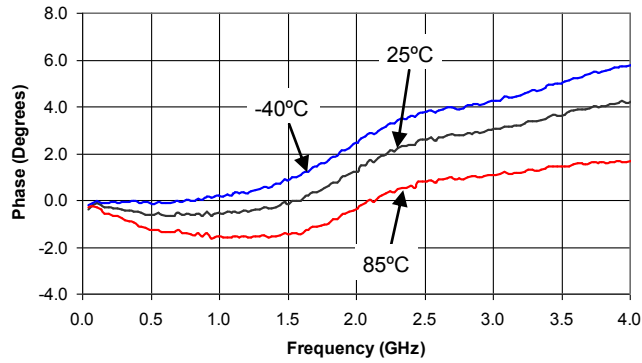


**VSWR - Reference State vs. Frequency**

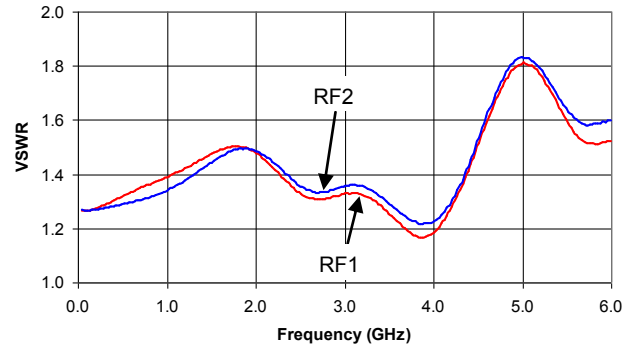


**VSWR - 0.5 dB Bit vs. Frequency**

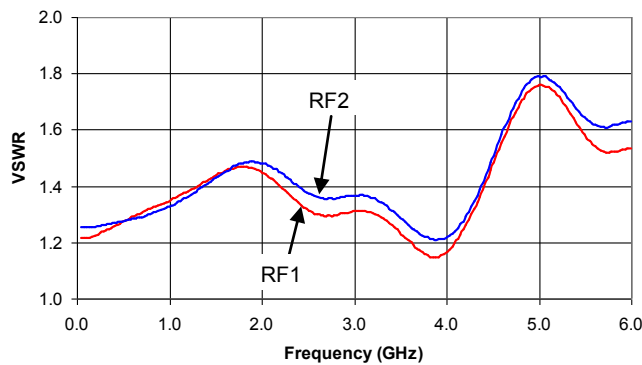


**VSWR - 1 dB Bit vs. Frequency**

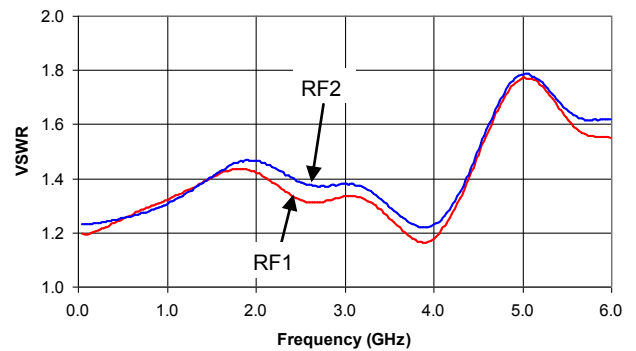

**VSWR - 2 dB Bit vs. Frequency**

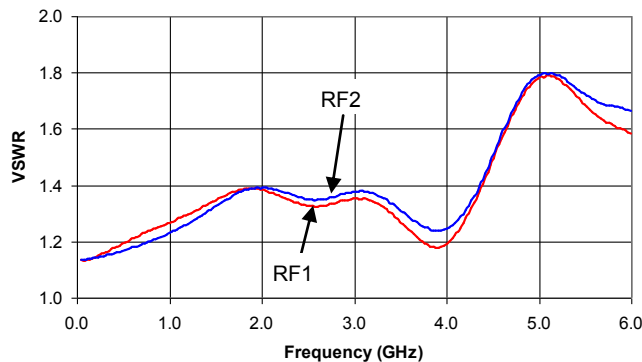


**VSWR - 4 dB Bit vs. Frequency**

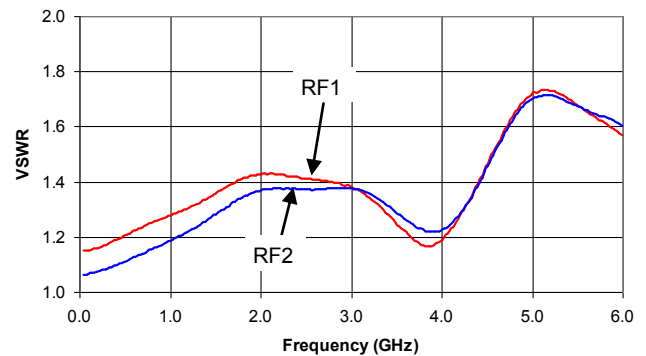


## Typical Performance Curves

*VSWR - 8 dB Bit vs. Frequency*

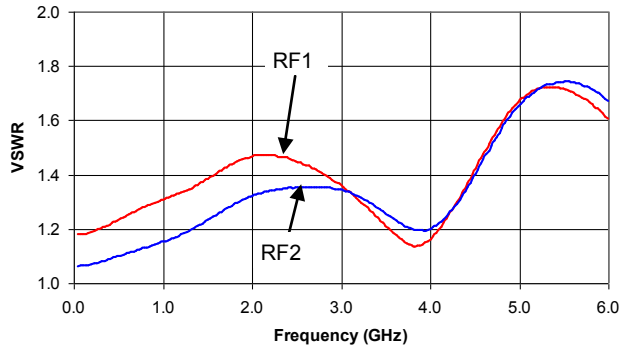

*VSWR - 15.5 dB Attenuation vs. Frequency*

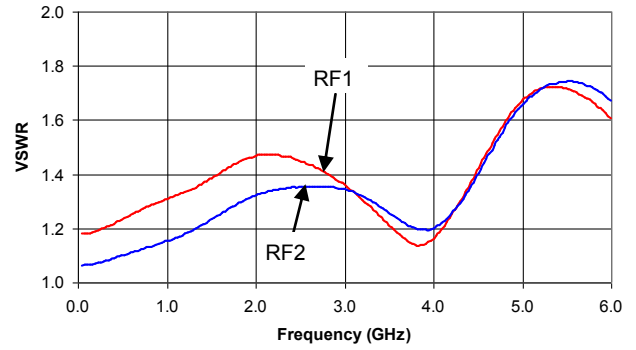

*Typical Input IP2 and IP3 at Room Temperature<sup>11</sup>*


Attenuation	IP2			IP3			Units
	50 MHz	500 MHz	2 GHz	50 MHz	500 MHz	2 GHz	
Reference State	50	72	73	43	40	44	dBm
0.5 dB	51	73	74	43	41	44	dBm
1 dB	51	73	75	43	41	44	dBm
2 dB	51	73	74	43	41	45	dBm
4 dB	51	73	74	43	41	45	dBm
8 dB	50	71	75	41	43	41	dBm
15.5 dB	53	74	79	43	42	44	dBm

11. IP2 and IP3 are measured with two-tone inputs F1 and F2 up to +5 dBm with 1 MHz spacing.

**Digital Attenuator, Constant Phase**  
**15.5 dB, 5-Bit, TTL Driver, DC - 4.0 GHz**

Rev. V2

**CSP-1, 4 x 6 mm, 32-lead PQFN†**

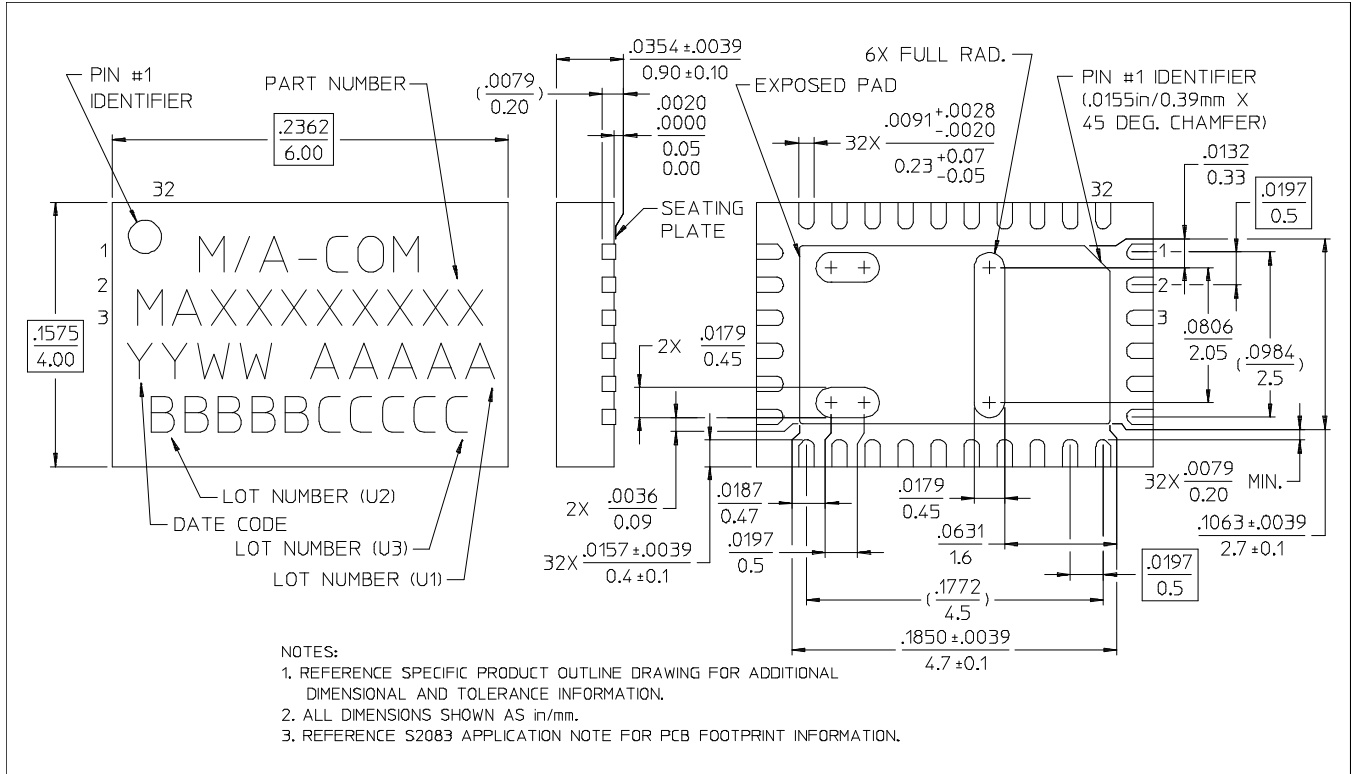

† Reference Application Note M538 for lead-free solder reflow recommendations.



M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.