

1:1.5 Flux Coupled Transformer

5 - 350 MHz



MABA-007766-CF28A0

Rev. V1

Features

- Surface Mount Package
- 1:1.5 Impedance
- Excellent amplitude and phase balance
- RoHS* Compliant Version of MABAES0025
- Available on 2000 piece Tape and Reel

Applications


- CATV / Broadband

Description

The MABA-007766-CF28A0 is a 1:1.5 RF transformer in a surface mount package.

Ideally suited for high volume CATV/Broadband applications. Typical applications include single to balanced mode conversion and impedance matching.

Schematic



Pin Configuration³

Pin #	Function	Pin #	Function
1	Secondary Dot	4	Primary
2	Secondary CT	5	Primary Dot
3	Secondary		

3. MACOM recommends connecting unused package pins to ground.

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$

Parameter	Test Conditions Frequency (MHz)	Units	Min.	Typ.	Max.
Insertion Loss	5 - 200	dB	—	0.7	1.5
	200 - 350			1.4	2.5
Amplitude Imbalance	5 - 200	dB	—	0.2	± 0.5
	200 - 350			0.4	± 1.0
Phase Imbalance	5 - 200	°	—	1.0	± 3.0
	200 - 350			2.0	± 4.0

Ordering Information^{1,2}

Part Number	Package
MABA-007766-CF28A0	2000 piece reel
MABA-007766-CF28TB	Customer Test Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

Absolute Maximum Ratings^{4,5}

Parameter	Absolute Maximum
Input Power	250 mW
DC current	200 mA
Operating Temperature	-40°C to +85°C

4. Exceeding any one or combination of these limits may cause permanent damage to this device.
5. MACOM does not recommend sustained operation near these survivability limits.

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

1:1.5 Flux Coupled Transformer 5 - 350 MHz




MABA-007766-CF28A0


Rev. V1

Typical Performance Curves⁶


Insertion Loss 1: From pin 5 to pin 1

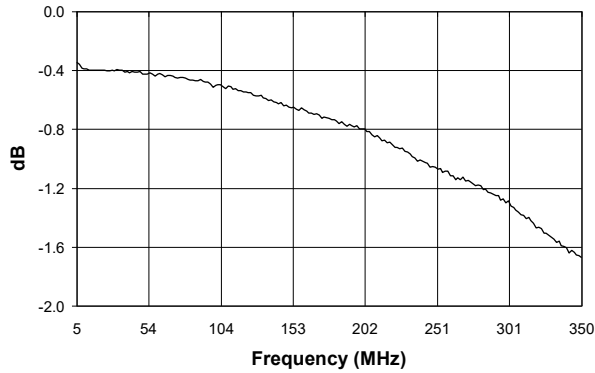


Insertion Loss 2: From pin 5 to pin 3

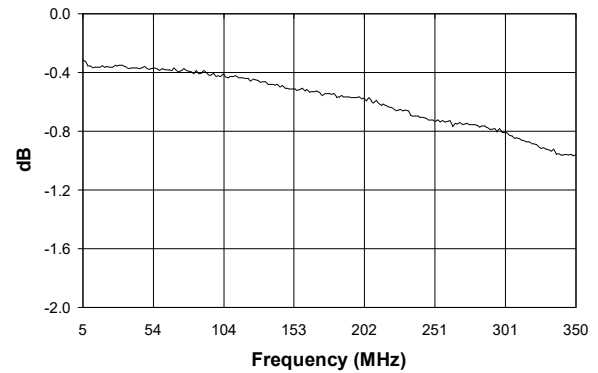

Amplitude Unbalance

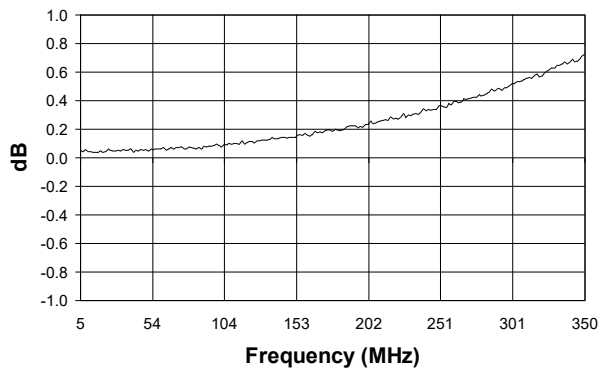

Phase Balance

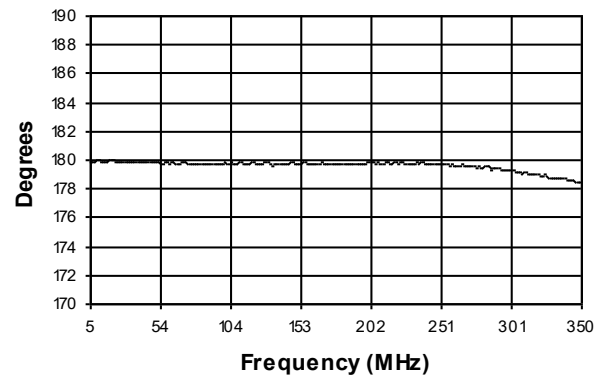

6. Temperature plots available on request.


1:1.5 Flux Coupled Transformer 5 - 350 MHz



MABA-007766-CF28A0


Rev. V1

Outline Drawing^{7,8,9,10}

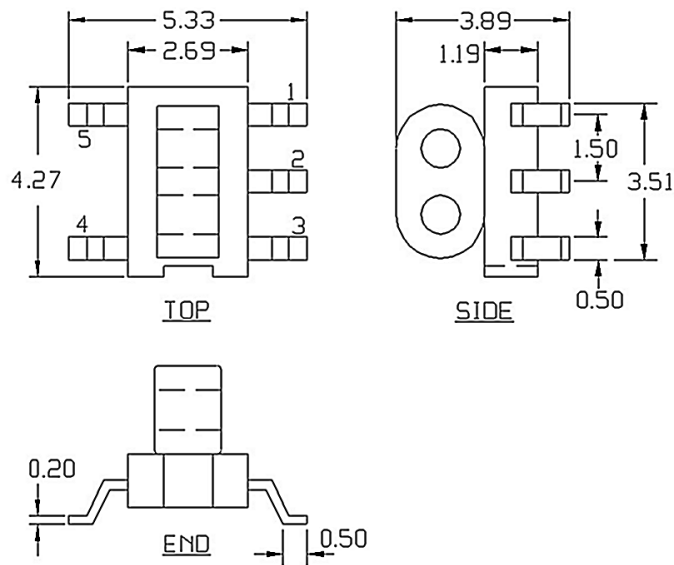

- 7. Dimensions in mm.
- 8. Tolerance: ± 0.2 mm unless otherwise noted.
- 9. Model number and lot code are printed on the reel.
- 10. Plating finish: CuSn6

Recommended PCB Layout¹¹

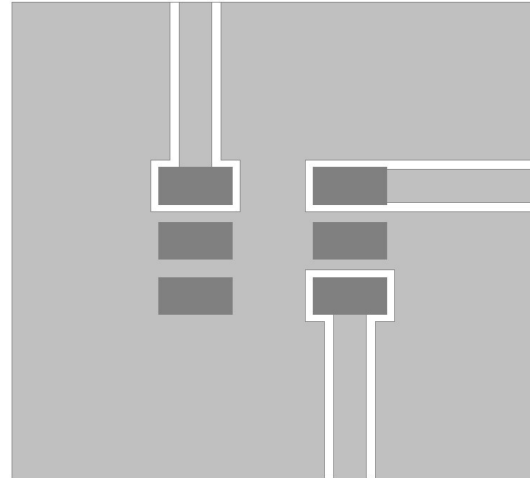

11. Recommended PCB FR4 layout shown above uses 1.57 mm +/- 10%

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Orientation	-	F26
Reference Application Note ANI-019 for orientation		

1:1.5 Flux Coupled Transformer

5 - 350 MHz



MABA-007766-CF28A0

Rev. V1

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.