

### 1:2 Transmission Line Transformer

# 1 - 1600 MHz

Rev. V4

#### **Features**


- Surface Mount Package
- 1:2 Impedance
- RoHS\* Compliant
- 260°C Reflow Compatible
- Tape and Reel Package

## **Description**

The MABA-010247-2R1250 is a RoHS compliant 1:2 RF transmission line transformer in a surface mount package. The windings of this device are welded to the package substrate for improved reliability and to eliminate lead content.

Ideally suited for high volume cellular and wireless application.

#### **Functional Schematic**

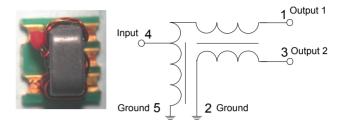

### **Pin Configuration**

Pin#	Function		
1	Secondary		
2	Ground		
3	Secondary Dot		
4	Primary Dot (Input)		
5	Primary (Ground)		

## Electrical Specifications: Freq. = 1 - 1600 MHz, $T_A = 25^{\circ}C$ , $Z_0 = 50 \Omega$ , $P_{IN} = 0 \text{ dBm}$

Parameter	Test Conditions Frequency (MHz)	Units	Min.	Тур.	Max.
Insertion Loss	1 - 750 750 - 1250 1250 -1600	dB	_	1.0 1.5 2.0	 2.5 4.0
Input Return Loss	1 - 500 500 - 1600	dB	20 10	30 15	_
Amplitude Unbalance	1 - 1250 1250 - 1600	dB	_	0.5 1.0	1.0 1.2
Phase Unbalance	1 - 1600	0	_	5	10

### **Ordering Information**

Parameter	Package
MABA-010247-2R1250	2000 piece reel

# **Absolute Maximum Ratings**

Parameter	Absolute Maximum	
RF Input Power	250 mW	
DC Current	50 mA	
Operating Temperature	-40°C to +85°C	
Storage Temperature	-55°C to +125°C	




# 1:2 Transmission Line Transformer

### 1 - 1600 MHz


Rev. V4

# Typical Performance: $T_A = 25^{\circ}C$


#### Insertion Loss

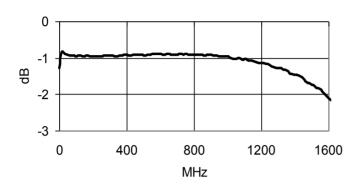


#### Amplitude Unbalance

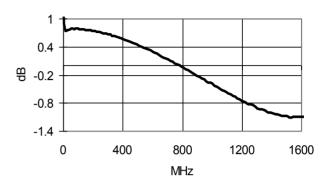

#### Phase Unbalance

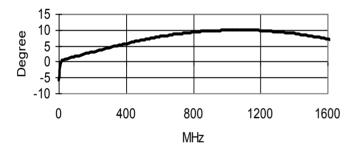

#### Input Return Loss

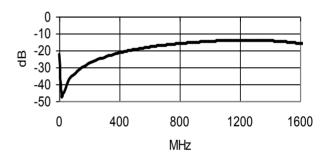





## 1:2 Transmission Line Transformer


1 - 1600 MHz Rev. V4

## **Outline Drawing**



### **Recommended Footprint**






POLICE VIEW

Dimensions in inches (mm).  $\pm 0.015$  (0.38) . Tolerance:  $\pm 0.015$  (0.38) unless otherwise noted.

# **Tape & Reel Information**

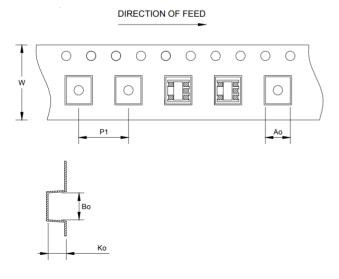

# **Tape & Reel Information**

Item	Units	Dimension
Qty. per reel	mm	2000
A <sub>O</sub>	mm	4.55 ±0.1
Bo	mm	4.75 ±0.1
Ko	mm	3.10 ±0.1
W	mm	12.00 ±0.3
P1	mm	8.00 ±0.1



1:2 Transmission Line Transformer

1 - 1600 MHz

Rev. V4

#### MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.