

Features

- 802.11a,n,ac Applications
- 0.9 dB T_x Insertion Loss
- 19 dB R_x Isolation
- 12 dB R_x Gain
- 2.2 dB Noise Figure
- 10 mA Current
- -40 dB EVM @ 23 dBm Input
(802.11ac 80 MHz / 256 QAM)
- Lead Free 2 mm 12-lead STQFN package
- RoHS* Compliant and 260°C Reflow Compatible
- Alternate Pin-Out of the MAMF-010614

Description

The MAMF-011038 is a multi-function MMIC assembled in a lead-free 2 mm 12-lead STQFN plastic package that includes a SPDT switch and LNA with bypass mode for the R_x path.

This multi-function device delivers high isolation between T_x and R_x paths, low T_x insertion loss and a high gain, low noise R_x path.


The MAMF-011038 is ideally suited for use on the front end of WLAN 802.11a,n,ac modules where small size is critical.

Ordering Information^{1,2}

Part Number	Package
MAMF-011038-TR3000	3000 piece reel
MAMF-011038-001SMB	Sample Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

Functional Schematic

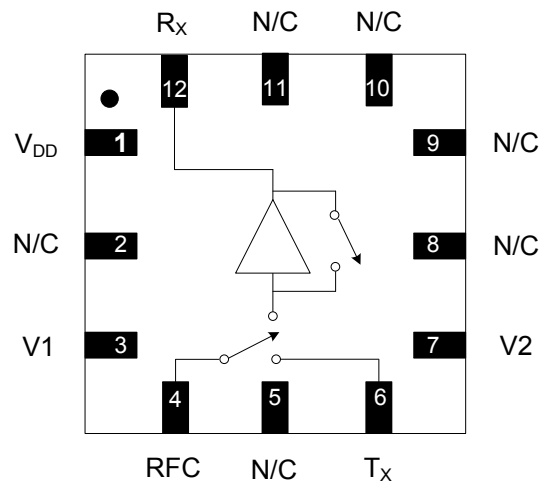

Pin Configuration³

Pin No.	Function	Description
1	V_{DD}	Drain Voltage Supply
2	N/C	No Connection
3	V1	Control 1
4	RFC	RF Common
5	N/C	No Connection
6	T_x	T_x Port
7	V2	Control 2
8	N/C	No Connection
9	N/C	No Connection
10	N/C	No Connection
11	N/C	No Connection
12	R_x	R_x Port
13	Pad ⁴	Ground

3. MACOM recommends connecting unused package pins to ground.
4. The exposed pad centered on the package bottom must be connected to RF and DC ground.

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

Integrated SPDT Switch and LNA with Bypass Mode 5 - 6 GHz

Rev. V1

Electrical Specifications: Freq. = 5.25 - 5.825 GHz, $V_{DD} = 3\text{ V}$, $V_C = 0/2.8\text{ V}$, $T_A = 25^\circ\text{C}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Isolation	RFC to T_X RFC to R_X (Gain Mode) RFC to R_X (Bypass Mode)	dB	—	19 19 19	—
T_X Insertion Loss	RFC to T_X	dB	—	0.9	1.2
T_X Input / Output Return Loss	RFC to T_X	dB	—	22	—
T_X Input P0.1dB	T_X Path On	dBm	—	31	—
T_X EVM	$P_{IN} = +23\text{ dBm}$, 802.11AC 80 MHz / 256 QAM	dB	—	-42	—
R_X Gain	RFC to R_X , Gain Mode	dB	10	12	—
R_X Insertion Loss	RFC to R_X , Bypass Mode	dB	—	6	7.5
R_X Input / Output Return Loss	RFC to R_X , Gain Mode	dB	—	10	—
R_X Noise Figure	Gain Mode	dB	—	2.2	—
R_X Input IP3	Gain Mode	dBm	—	10	—
R_X Input P0.1dB	Bypass Mode	dBm	—	10	—
R_X Input P1dB	Gain Mode	dBm	-5	-3	—
R_X EVM	$P_{IN} = -15\text{ dBm}$, Gain Mode	dB	—	-46	—
Quiescent Current	No RF, Gain Mode, $V_{DD} = 3\text{ V}$	mA	—	10	12
Control Current	All States except High Gain High Gain State	μA	—	10 330	—

Absolute Maximum Ratings^{5,6}

Parameter	Absolute Maximum
Input Power R_X Gain Mode R_X Bypass Mode T_X , 5.0 V_C , RFC - T_X T_X , 3.3 V_C , RFC - T_X	0 dBm 20 dBm 35 dBm CW 33 dBm CW
V_{DD}	5 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C


- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

Truth Table^{7,8}

Control V1	Control V2	RFC- R_X	RFC- T_X
Low	Low	Bypass Mode	Off
Hi	Low	Gain Mode	Off
Low	Hi	Off	On

- Differential voltage, V (state Low) - V (state Hi), must be +2.7 V minimum and must not exceed +5.0 V.
- Low = $0 \pm 0.3\text{ V}$, Hi = +2.7 V to +5.0 V.

Functional Schematic

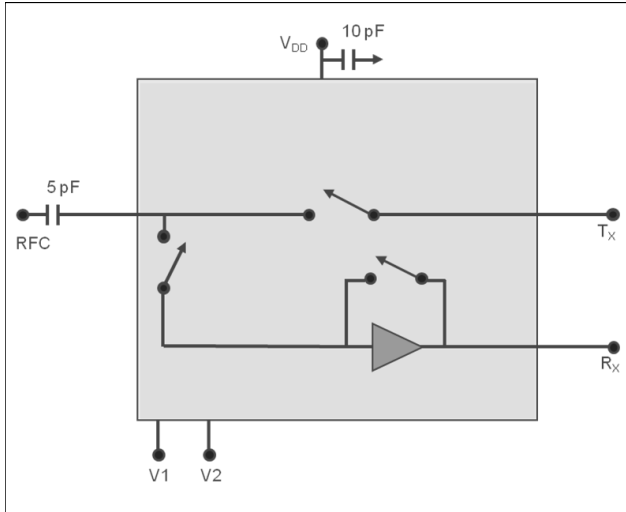


Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Lead-Free 2 mm STQFN-12LD -0.4 mm Pitch[†]

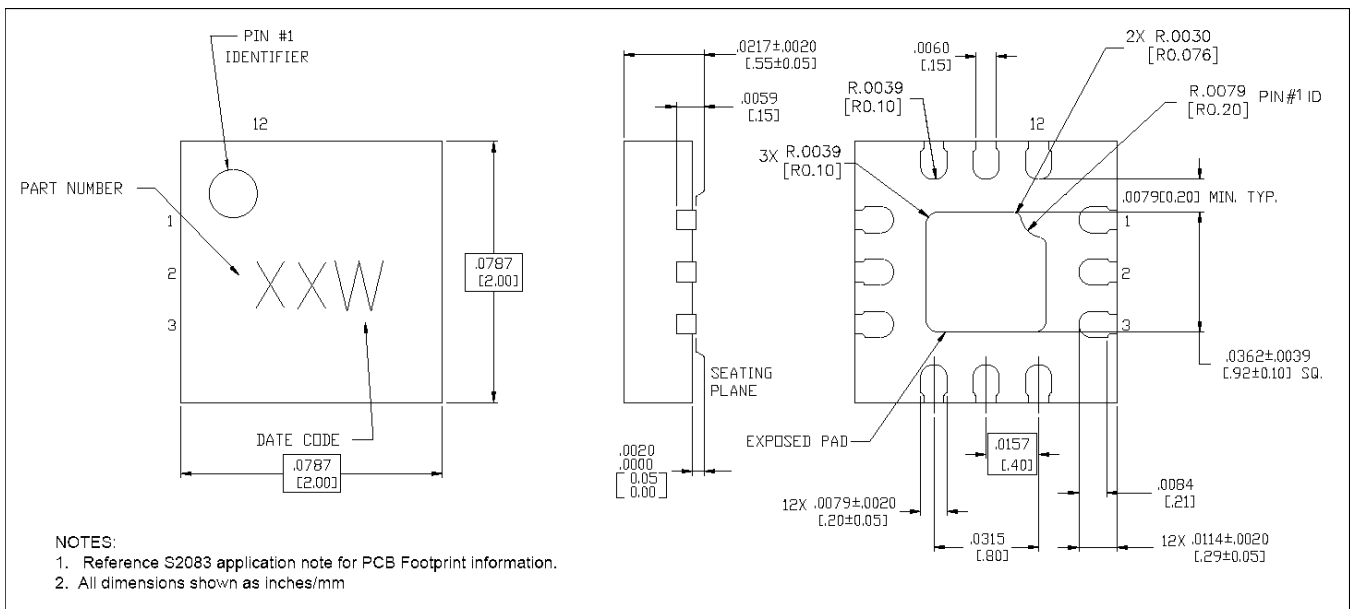


[†] Reference Application Note S2083 for lead-free solder reflow recommendations.
 Meets JEDEC moisture sensitivity level 1 requirements.
 Plating is Ni/Pd/Au over Copper.

Integrated SPDT Switch and LNA with Bypass Mode 5 - 6 GHz


Rev. V1

Typical Performance Curves:


RFC to R_X

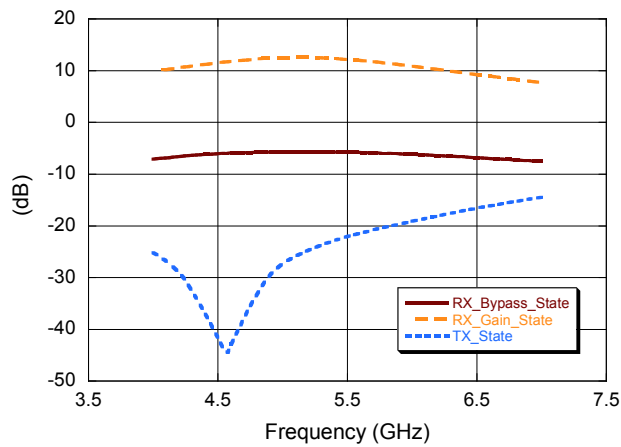


RFC to T_X

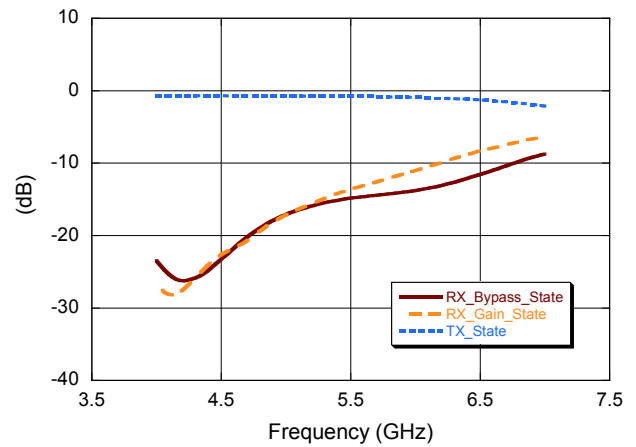


R_X to RFC

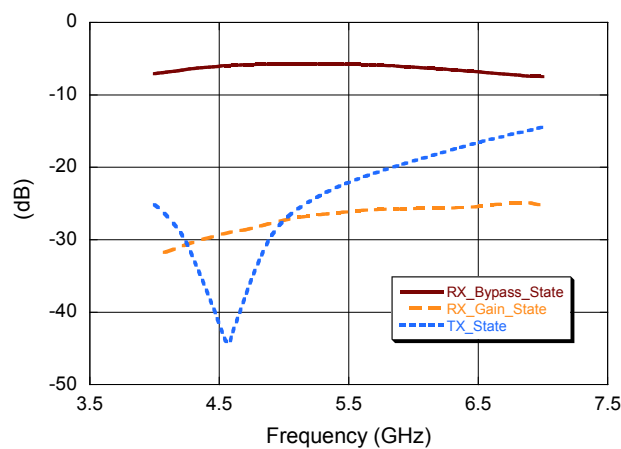


T_X to RFC

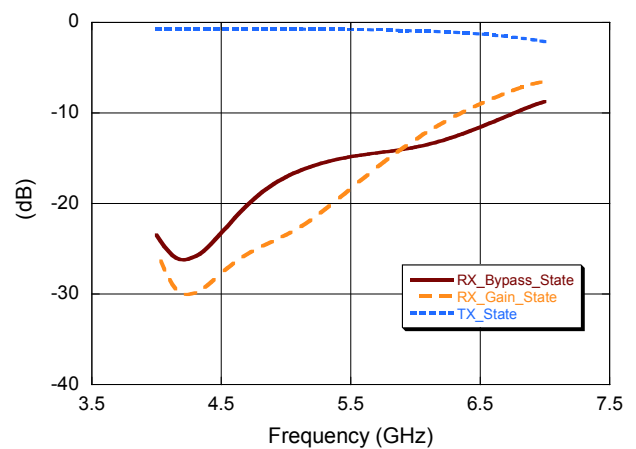

RFC to R_X Gain

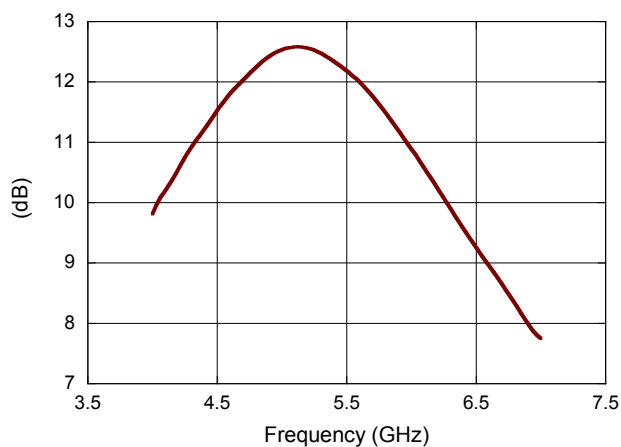

T_X Insertion Path

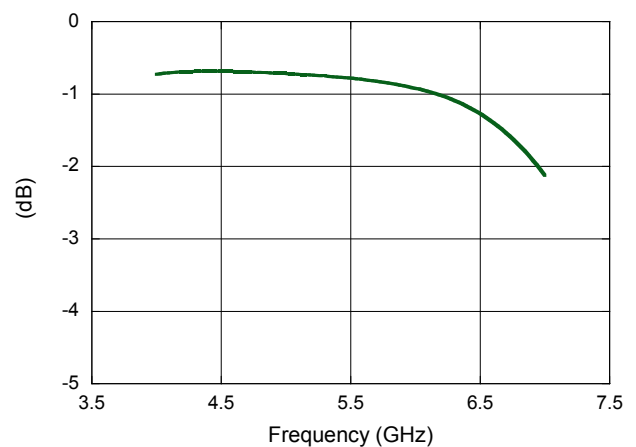


Integrated SPDT Switch and LNA with Bypass Mode 5 - 6 GHz


Rev. V1

Typical Performance Curves:


RFC Isolation from T_X

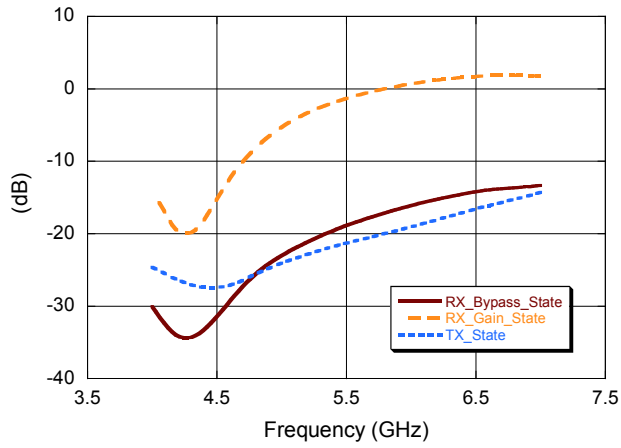


T_X Isolation from R_X

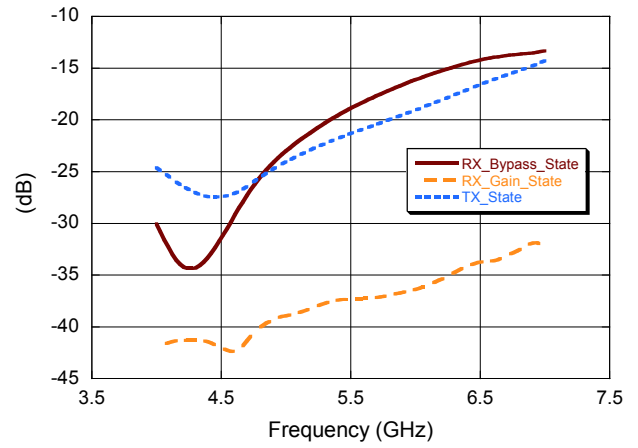


R_X Port Return Loss

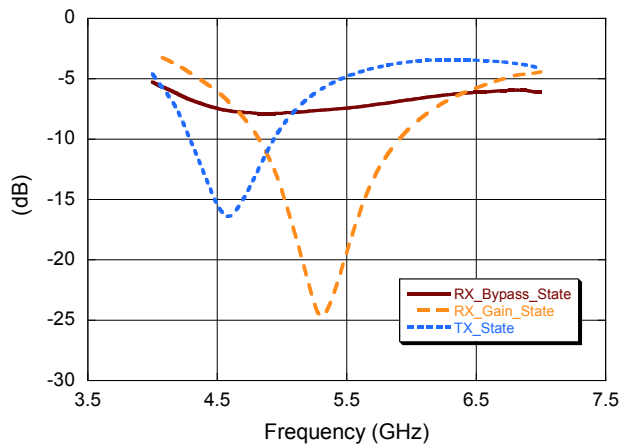


T_X Port Return Loss

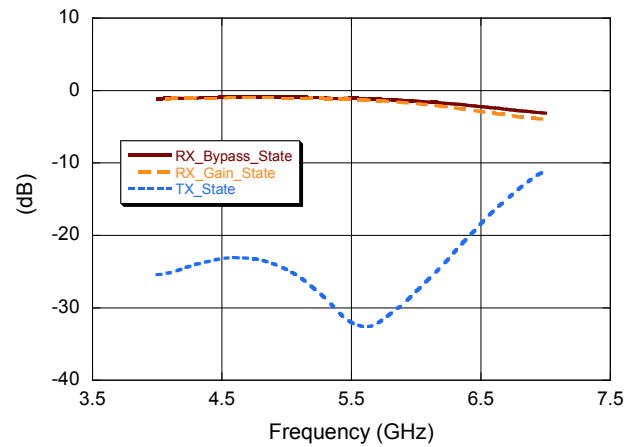

RFC Port Return Loss

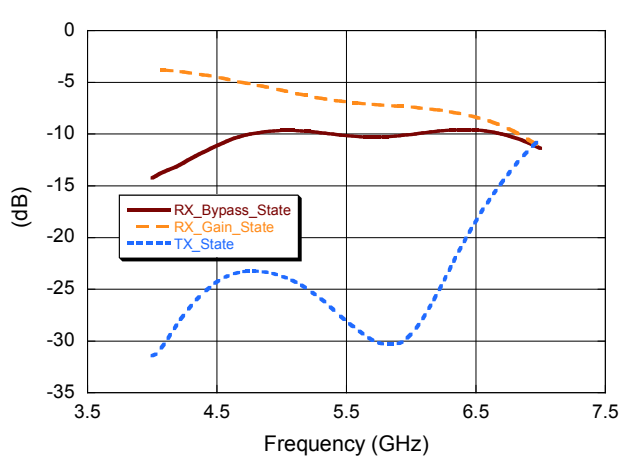

R_X Noise Figure, Gain Mode

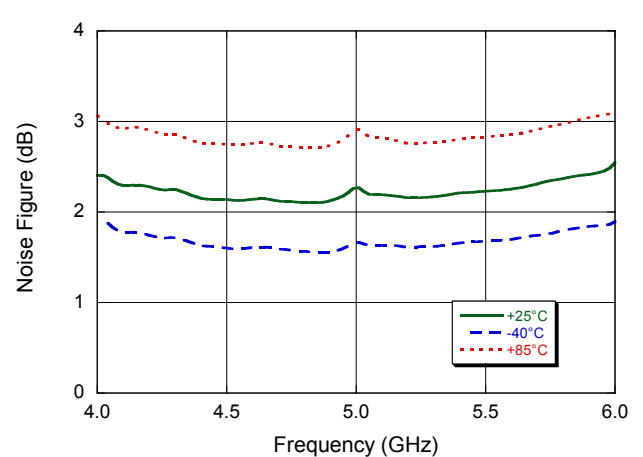


Integrated SPDT Switch and LNA with Bypass Mode 5 - 6 GHz


Rev. V1

Typical Performance Curves:


R_x Input IP3, Gain Mode @ +25°C

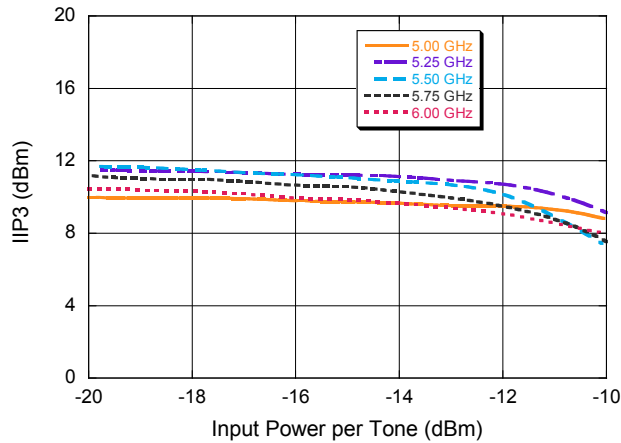


R_x Input IP3, Bypass Mode @ +25°C

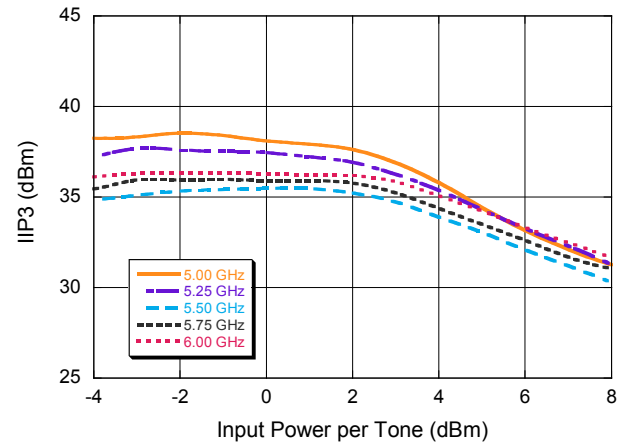


R_x Input IP3, Gain Mode @ -40°C

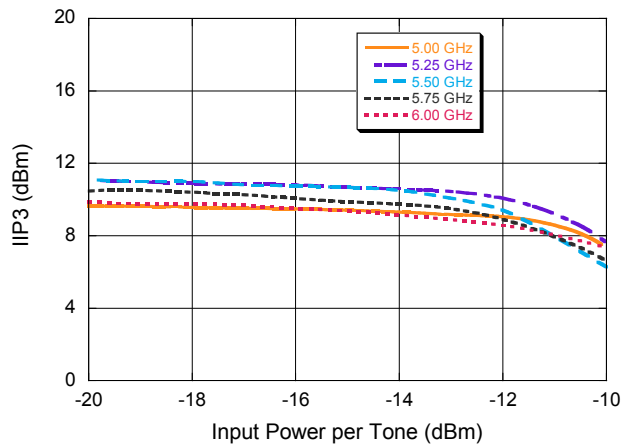


R_x Input IP3, Bypass Mode @ -40°C

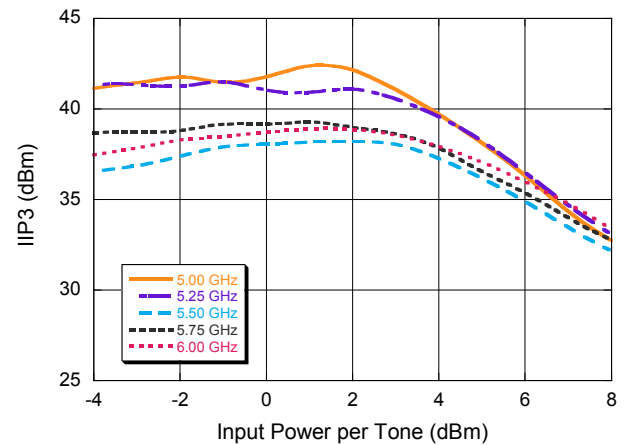

R_x Input IP3, Gain Mode @ +85°C

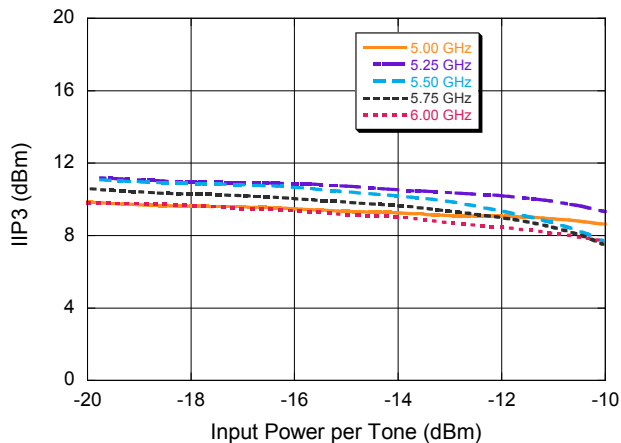

R_x Input IP3, Bypass Mode @ +85°C

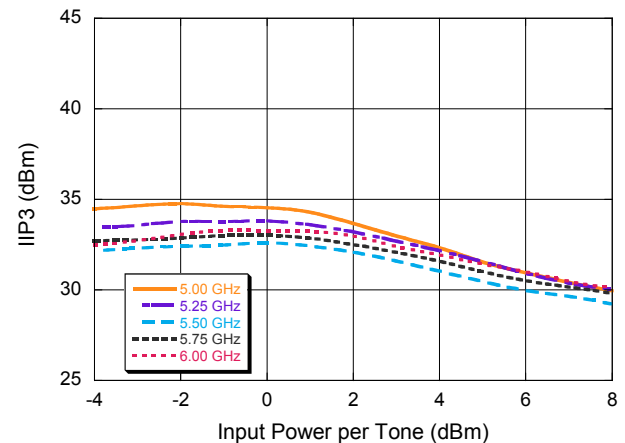


Integrated SPDT Switch and LNA with Bypass Mode 5 - 6 GHz


Rev. V1

Typical Performance Curves:


T_x Input IP3 @ +25°C

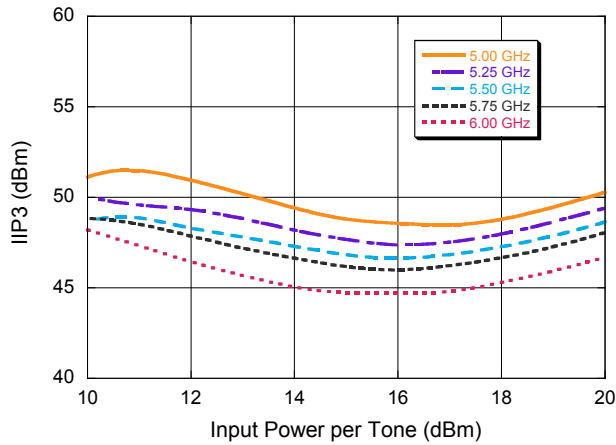


T_x Input IP3 @ -40°C

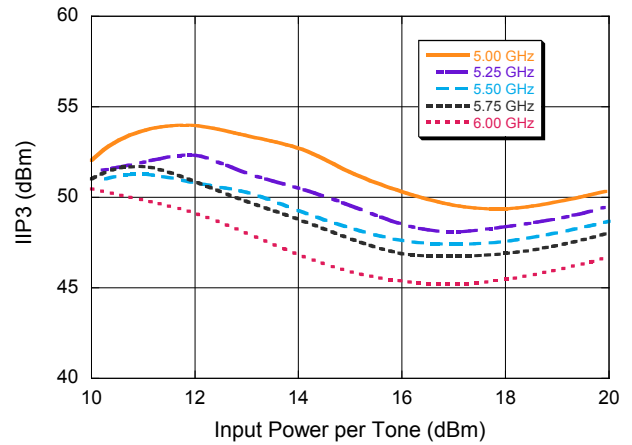

T_x Input IP3 @ +85°C

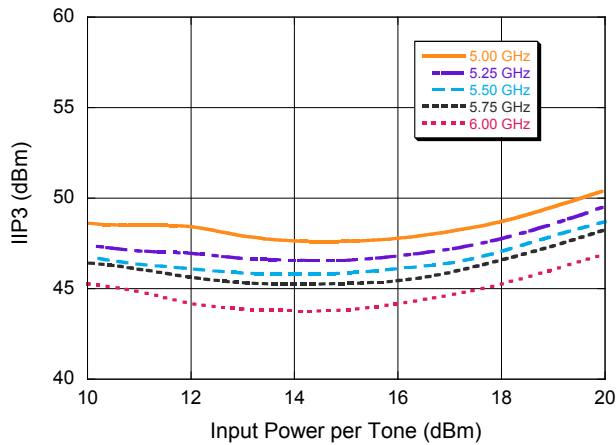

T_x Output IP3 @ +25°C

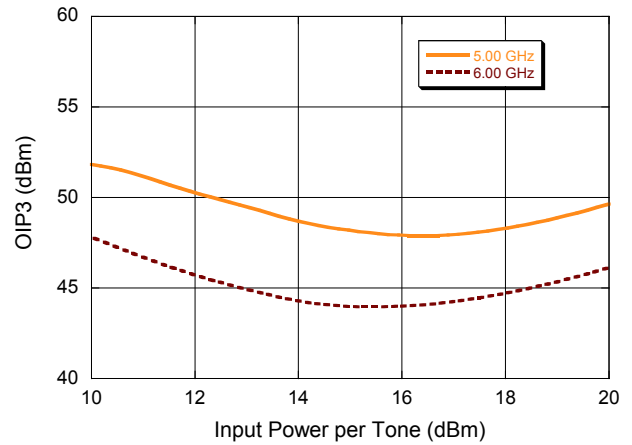

System Compensated EVM, 802.11AC 80 MHz / 256 QAM

