

Silicon Double Balanced HMIC Mixer 850 - 1050 MHz

Rev. V3

Features

- +21 dBm Typical Input IP3
- 8.3 dB Typical Conversion Loss
- +5 to +10 dBm LO Drive
- Fully Balanced Passive Mixer
- Low Cost Miniature Plastic MLP Package
- Lead Free (RoHS* Compliant) with 260°C Re-flow Capability
- 100% Matte Tin Plating

Description

MAMX-090950-1277LT is a 850 - 1050 MHz silicon monolithic double balanced mixer in a low cost miniature surface mount MLP 3 mm, 16 lead plastic package. The die uses M/A-COM's unique HMIC silicon/glass process to realize low loss passive elements while retaining the advantages of medium barrier silicon Schottky barrier diodes.

Applications

These mixers are well suited for GSM and CDMA Cellular basestation applications where small size and high performance are required. Typical Applications include frequency conversion, modulation, and demodulation in wireless receivers and transmitters.

Ordering Information

Model No.	Package
MAMX-090950-1277LT	Tape and Reel


Absolute Maximum Ratings ^{1,2}

Parameter	Maximum Rating
Operating Temperature	-65°C to +125°C
Storage Temperature	-65°C to 150°C
Incident LO Power	+20 dBm
Incident RF Power	+20 dBm
Soldering Temperature	+260°C max.

1. Exceeding these limits may cause permanent damage.
2. Please refer to application note M538 for surface mounting instructions

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

MLP 3mm Package - Circuit Side

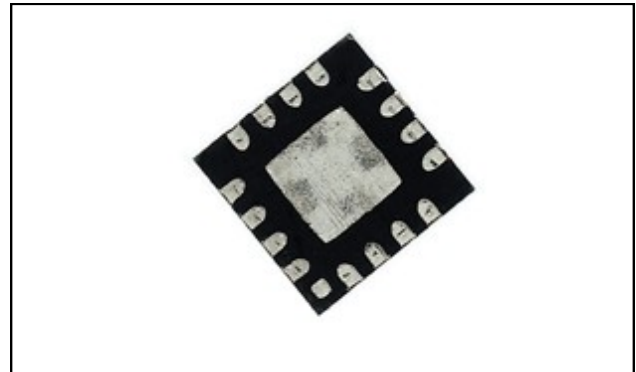


PIN Configuration ³

PIN	Function	PIN	Function
1	N/C	9	N/C
2	N/C	10	RF
3	LO	11	N/C
4	N/C	12	N/C
5	N/C	13	N/C
6	N/C	14	IF
7	N/C	15	N/C
8	N/C	16	N/C

3. Center area is ground

Schematic

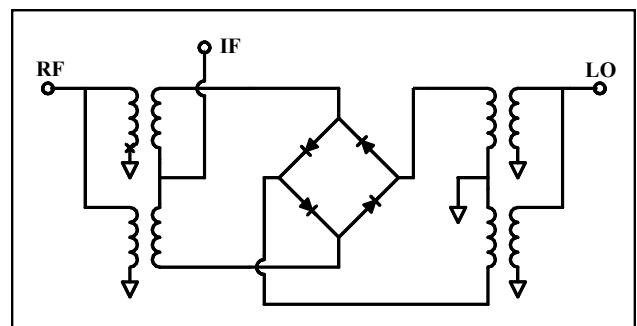

Silicon Double Balanced HMIC Mixer 850 - 1050 MHz

Rev. V3

Electrical Specifications @ 25°C

Parameter	Frequency Range	Test Conditions	Units	Min.	Typ.	Max.
Conversion Loss	900 MHz 850 - 1050 MHz	LO Drive = +7 dBm RF = -10 dBm, IF = 60 MHz	dB dB	— —	8.2 8.5	8.9 9.5
L - R Isolation	900 MHz 850 - 1050 MHz	LO Drive = +7 dBm RF Level = -10 dBm	dB dB	— —	65 62	— —
L - I Isolation	900 MHz 850 - 1050 MHz	LO Drive = +7 dBm RF Level = -10 dBm	dB dB	— —	46 46	— —
R - I Isolation	900 MHz 850 - 1050 MHz	LO Drive = +7 dBm RF Level = -10 dBm	dB dB	— —	23 23	— —
LO VSWR	900 MHz 850 - 1050 MHz	LO Drive = +7 dBm RF Level = -10 dBm	Ratio Ratio	— —	1.5:1 1.5:1	— —
RF VSWR	900 MHz 850 - 1050 MHz	LO Drive = +7 dBm RF Level = -10 dBm	Ratio Ratio	— —	1.3:1 1.5:1	— —
IF VSWR	DC - 400 MHz	LO Drive = +7 dBm RF Level = -10 dBm	Ratio Ratio	— —	1.5:1 1.5:1	— —
Input IP3	900 MHz 850 - 1050 MHz	LO Drive = +7 dBm RF = -10 dBm, IF = 60 MHz	dBm dBm	17.8 16.9	21.0 20.5	— —
Input 1 dB Compression	900 MHz 850 - 1050 MHz	LO Drive = +7 dBm IF = 60 MHz	dBm dBm	— —	4.3 4.3	— —
IF 1 dB Bandwidth	DC - 400 MHz	LO = 900 MHz @ +7 dBm	MHz	0	—	400


Silicon Double Balanced HMIC Mixer 850 - 1050 MHz

Rev. V3

Typical Performance Curves


Conversion Loss vs. Frequency

LO Drive = +5/+7/+9 dBm, RF = -10 dBm, IF = 60 MHz

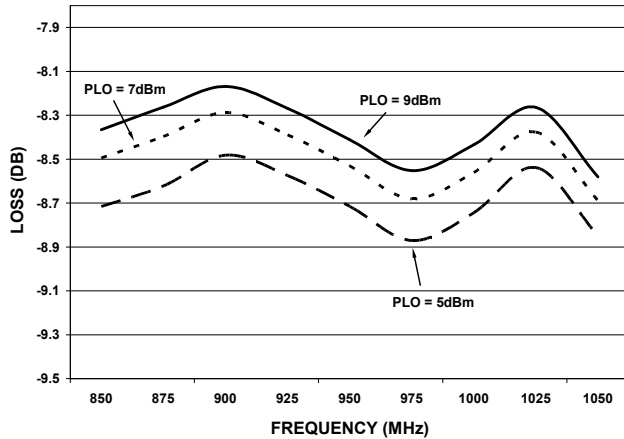


Input 1 dB & P1dB vs. Frequency

LO Drive = +5/+7/+9 dBm, RF = -10 dBm, IF = 60 MHz

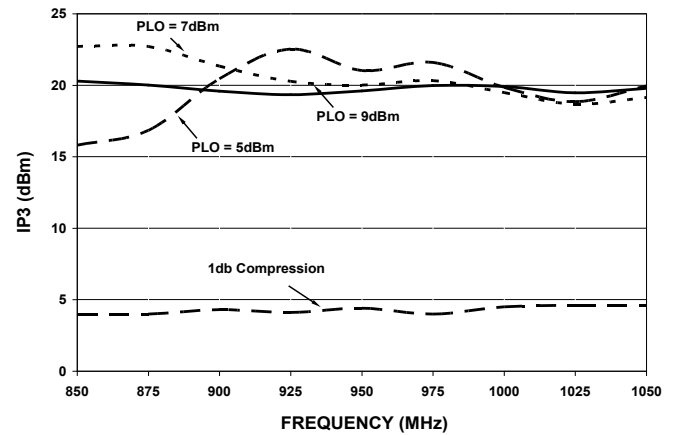


VSWR vs. Frequency

LO Drive = +7 dBm, RF = -10 dBm, IF = 60 MHz

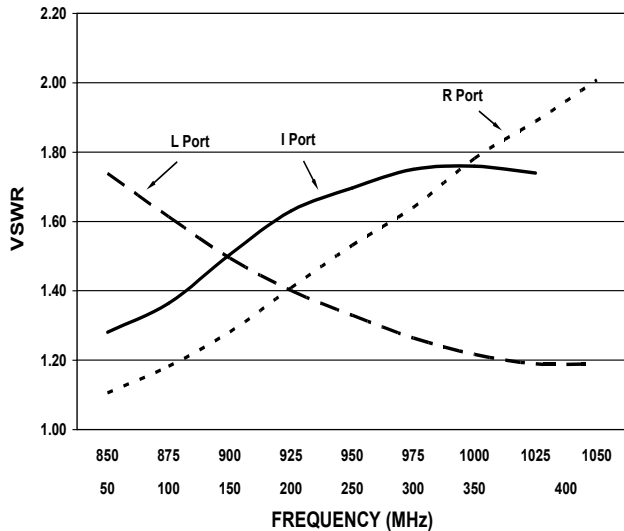

Isolation vs. Frequency


LO Drive = +7 dBm, RF = -10 dBm

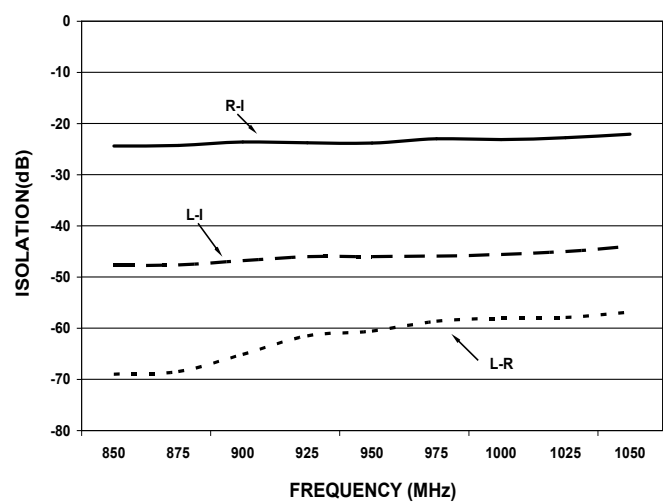

Silicon Double Balanced HMIC Mixer 850 - 1050 MHz

Rev. V3

MAMX-090950-1277LT Outline 3mm FQFP - 16 Lead Saw Singulated

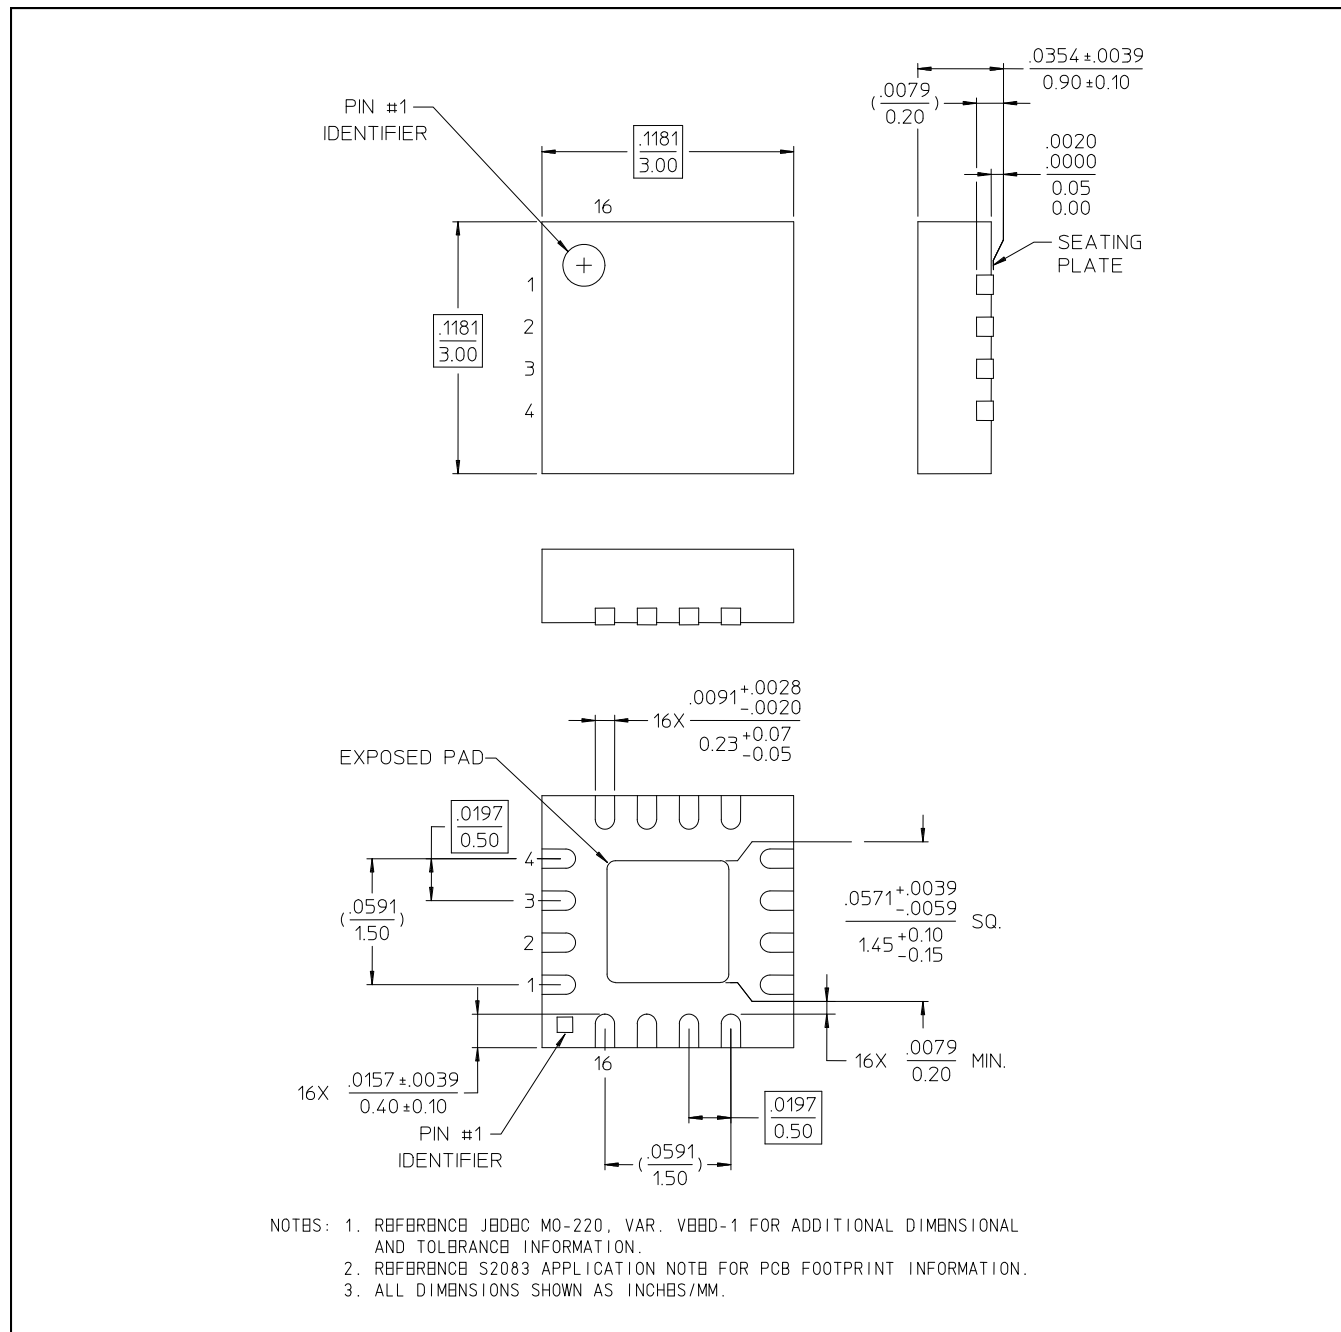

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.