


### Features

- Available in JAN, JANTX, JANTXV per MIL-PRF-19500/545
- TO-5 Package: 2N3867, 2N3868
- TO-39 (TO-205AD) Package: 2N3867S, 2N3868S

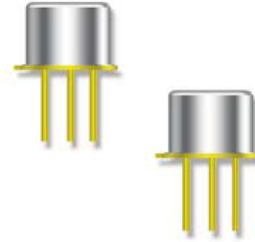

### Electrical Characteristics

Parameter	Test Conditions	Symbol	Units	Min.	Max.
<b>Off Characteristics</b>					
Collector - Base Breakdown Voltage	$I_C = 100 \mu\text{Adc}$ , 2N3867, 2N3867S $I_C = 100 \mu\text{Adc}$ , 2N3868, 2N3868S	$V_{(BR)CEO}$	Vdc	40 60	—
Collector - Emitter Breakdown Voltage	$I_C = 20 \text{ mAdc}$ , 2N3867, 2N3867S $I_C = 20 \text{ mAdc}$ , 2N3868, 2N3868S	$V_{(BR)CEO}$	Vdc	40 60	—
Emitter - Base Breakdown Voltage	$I_C = 100 \text{ mAdc}$	$V_{(BR)EBO}$	Vdc	40	—
Collector - Emitter Cutoff Current	$V_{EB} = 2 \text{ Vdc}$ , $V_{CE} = 40 \text{ Vdc}$ , 2N3867, 2N3867S $V_{EB} = 2 \text{ Vdc}$ , $V_{CE} = 60 \text{ Vdc}$ , 2N3868, 2N3868S	$I_{CEX}$	$\mu\text{Adc}$	—	1.0 1.0
Collector - Base Cutoff Current	$V_{CB} = 60 \text{ Vdc}$ , 2N3867, 2N3867S $V_{CB} = 80 \text{ Vdc}$ , 2N3868, 2N3868S	$I_{CEO}$	$\mu\text{Adc}$	—	100
Emitter - Base Cutoff Current	$V_{EB} = 4.0 \text{ Vdc}$	$I_{EBO}$	$\mu\text{Adc}$	—	100
<b>On Characteristics<sup>1</sup></b>					
Forward Current Transfer Ratio	$I_C = 500 \text{ mAdc}$ , $V_{CE} = 1 \text{ Vdc}$ , 2N3867, 2N3867S 2N3868, 2N3868S $I_C = 1.5 \text{ Adc}$ , $V_{CE} = 2 \text{ Vdc}$ , 2N3867, 2N3867S 2N3868, 2N3868S $I_C = 2.5 \text{ Adc}$ , $V_{CE} = 3 \text{ Vdc}$ , 2N3867, 2N3867S 2N3868, 2N3868S $I_C = 3.0 \text{ mAdc}$ , $V_{CE} = 5 \text{ Vdc}$ , All Types	$H_{FE}$	-	50 35 40 30 25 20 20	— — 200 150 — — —
Collector - Emitter Saturation Voltage	$I_C = 500 \text{ mAdc}$ , $I_B = 50 \text{ mAdc}$ $I_C = 1.5 \text{ Adc}$ , $I_B = 150 \text{ mAdc}$ $I_C = 2.5 \text{ Adc}$ , $I_B = 250 \text{ mAdc}$	$V_{CE(SAT)}$	Vdc	—	0.50 0.75 1.50
Base - Emitter Saturation Voltage	$I_C = 500 \text{ mAdc}$ , $I_B = 50 \text{ mAdc}$ $I_C = 1.5 \text{ Adc}$ , $I_B = 150 \text{ mAdc}$ $I_C = 2.5 \text{ Adc}$ , $I_B = 250 \text{ mAdc}$	$V_{BE(SAT)}$	Vdc	—	1.0 1.4 2.0

1. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

## PNP Power Silicon Transistor

Rev. V1

### Electrical Characteristics

Parameter	Test Conditions	Symbol	Units	Min.	Max.
<b>Dynamic Characteristics</b>					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio	$I_C = 100 \text{ mAdc}, V_{CE} = 5.0 \text{ Vdc}, f = 20 \text{ MHz}$	$ h_{FE} $	-	3	12
Output Capacitance	$V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1 \text{ MHz}$	$C_{OBO}$	pF	—	120
Input Capacitance	$V_{CB} = 3 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1 \text{ MHz}$	$C_{IBO}$	pF	—	800
<b>Switching Characteristics</b>					
Delay Time	$V_{CC} = -30 \text{ Vdc}, V_{EB} = 0$	$T_D$	ns	—	35
Rise Time	$I_C = 1.5 \text{ Adc}, I_{B1} = 150 \text{ mAdc}$	$T_R$	ns	—	65
Storage Time	$V_{CC} = -30 \text{ Vdc}, V_{EB} = 0$	$T_S$	ns	—	500
Fall Time	$I_C = 1.5 \text{ Adc}, I_{B1} = 150 \text{ mAdc}$	$T_F$	ns	—	100
Turn-On Time	$V_{CC} = 30, I_C = 1.5 \text{ Adc}, I_B = 150 \text{ mAdc}$	$T_{ON}$	ns	—	100
Turn-Off Time	$V_{CC} = 30, I_C = 1.5 \text{ Adc}, I_B = 150 \text{ mAdc}$	$T_{OFF}$	ns	—	100
<b>Safe Operating Area</b>					
DC Tests:	$T_C = +25^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s}$				
Test 1:	$V_{CE} = 3.3 \text{ Vdc}, I_C = 3 \text{ Adc}$				
Test 2:	$V_{CE} = 40 \text{ Vdc}, I_C = 160 \text{ mAdc}, 2\text{N}3867, 2\text{N}3867\text{S}$				
Test 3:	$V_{CE} = 60 \text{ Vdc}, I_C = 80 \text{ mAdc}, 2\text{N}3868, 2\text{N}3868\text{S}$				

### Absolute Maximum Ratings

Ratings	Symbol	Value
Collector - Emitter Voltage 2N3867, 2N3867S 2N3868, 2N3868S	$V_{CEO}$	40 Vdc 60 Vdc
Collector - Base Voltage 2N3867, 2N3867S 2N3868, 2N3868S	$V_{CBO}$	40 Vdc 60 Vdc
Emitter - Base Voltage	$V_{EBO}$	4 Vdc
Collector Current	$I_C$	3 Adc
Total Power Dissipation @ $T_A = 25^\circ\text{C}^2$ @ $T_C = 25^\circ\text{C}^3$	$P_T$	1 W 10 W
Operating & Storage Temperature Range	$T_{OP}, T_{STG}$	-55°C to +200°C

- Derate linearly 5.71 mW / °C for  $T_A > +25^\circ\text{C}$ .
- Derate linearly 57.1 mW / °C for  $T_C > +25^\circ\text{C}$ .

### Thermal Characteristics

Characteristics	Symbol	Max. Value
Thermal Resistance, Junction to Case	$R_{\theta JC}$	17.5°C/W

2


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

For further information and support please visit:  
<https://www.macom.com/support>

DC-0015127


## Outline Drawings

### TO-5 Package (2N3867S, 2N3868S)

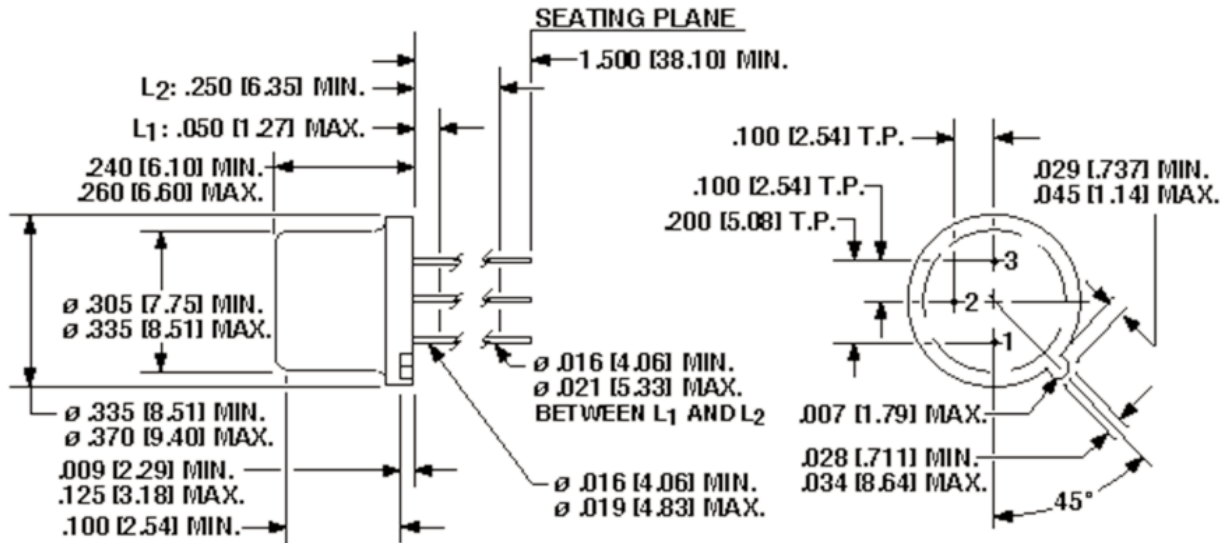

Dimensions are in inches.

### TO-39 (TO-205AD) Package (2N3867, 2N3868)

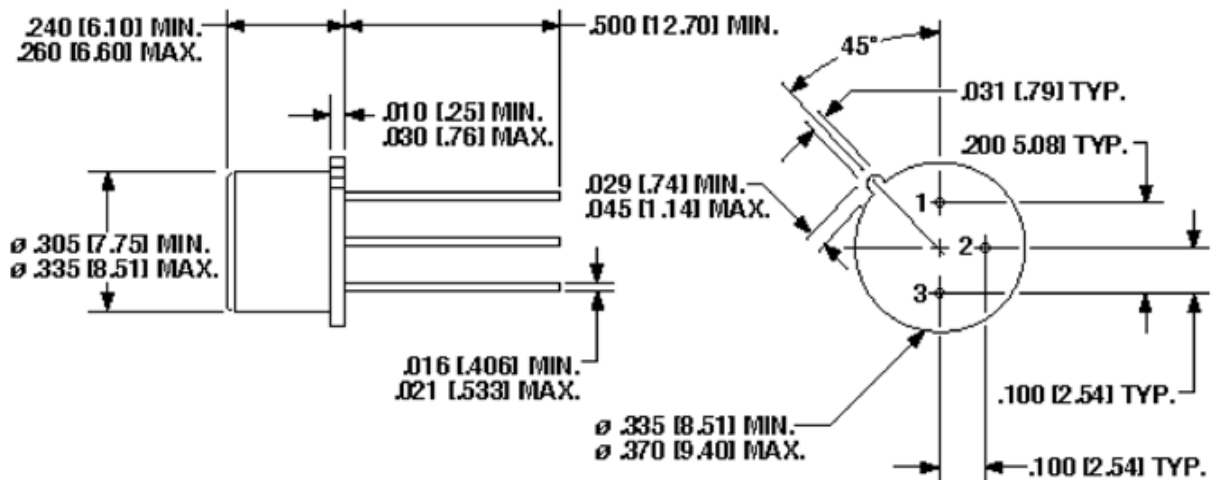

Dimensions are in inches.

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.