


## Zener Diode Chip Series

Rev. V1

### Features

- 0.5 W Capability with Proper Heat Sinking
- Electrically Equivalent to 1N4099 - 1N4135

### Die

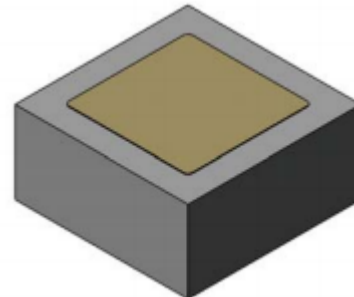

### Description

These 0.5 W zener diodes are electrically equivalent to the 1N4099 - 1N4135 series diodes. They are compatible with all wire bonding and die attach techniques with the exception of solder reflow.

These diodes are available in JANHC and JANKC per MIL-PRF-19500/127.

### Electrical Specifications: Zener Test Current = 250 $\mu$ A, $T_A = +25^\circ\text{C}$

Part #	Zener Voltage <sup>1</sup> $V_Z @ 250 \mu\text{A}$	Zener Impedance <sup>2</sup> $Z_{ZT} @ 500 \mu\text{A}$	Reverse Voltage $I_R @ V_R$	
	Nominal	Maximum	Maximum	
	V	$\Omega$	$\mu\text{A}$	V
CD4099	6.8	200	10	5.17
CD4100	7.5	200	10	5.70
CD4101	8.2	200	1	6.24
CD4102	8.7	200	1	6.61
CD4103	9.1	200	1	6.92
CD4104	10	200	1	7.60
CD4105	11	200	0.05	8.44
CD4106	12	200	0.05	9.12
CD4107	13	200	0.05	9.87
CD4108	14	200	0.05	10.65
CD4109	15	100	0.05	11.40
CD4110	16	100	0.05	12.15
CD4111	17	100	0.05	12.92
CD4112	18	100	0.05	13.67
CD4113	19	150	0.05	18.25
CD4114	20	150	0.01	15.20
CD4115	22	150	0.01	16.72
CD4116	24	150	0.01	18.25
CD4117	25	150	0.01	19.00
CD4118	27	150	0.01	20.45
CD4119	28	200	0.01	21.28

(Continued next page)

\* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

### Electrical Specifications: Zener Test Current = 250 $\mu$ A, $T_A = +25^\circ\text{C}$

Part #	Zener Voltage <sup>1</sup> $V_Z @ 250 \mu\text{A}$	Zener Impedance <sup>2</sup> $Z_{ZT} @ 500 \mu\text{A}$	Reverse Voltage $I_R @ V_R$	
	Nominal	Maximum	Maximum	
	V	$\Omega$	$\mu\text{A}$	V
CD4120 CD4121	30 33	200 200	0.01 0.01	22.80 25.08
CD4122 CD4123	36 39	200 200	0.01 0.01	27.38 29.65
CD4124 CD4125	43 47	250 250	0.01 0.01	32.56 35.75
CD4126 CD4127	51 56	300 300	0.01 0.01	38.76 42.60
CD4128 CD4129	60 20	400 500	0.01 0.01	45.60 47.10
CD4130 CD4131	68 75	700 700	0.01 0.01	51.68 57.00
CD4132 CD4133	82 87	800 1000	0.01 0.01	62.32 66.12
CD4134 CD4135	91 100	1200 1500	0.01 0.01	69.16 76.00


1. Zener voltage range equals nominal voltage  $\pm 5\%$  for "A" suffix. No suffix denotes  $\pm 10\%$ , "C" suffix =  $\pm 2\%$  and "D" suffix =  $\pm 1\%$ .
2. Zener impedance is derived by superimposing on  $I_{ZT}$  at 60 HZ RMS AC current equal to 10% of  $I_{ZT}$ .

### Absolute Maximum Ratings<sup>3,4</sup>

Parameter	Absolute Maximum
Forward Voltage	1.5 V @ 200 mA
Operating Temperature	-65°C to +175°C
Storage Temperature	-65°C to +175°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.

### Zener Impedance vs. Operating Current

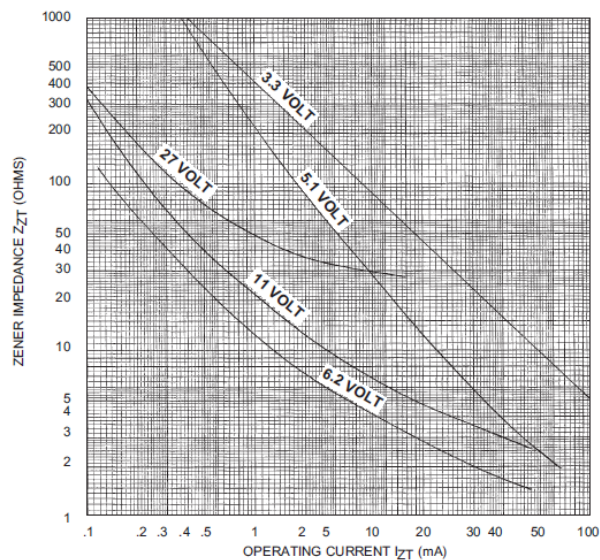

### Die

Die layout diagram showing dimensions in inches and millimeters. The top width is  $.021 \pm .002$  [0.53 ± 0.05]. The left height is  $.021 \pm .002$  [0.53 ± 0.05]. The right height is  $.015 \pm .002$  [0.38 ± 0.05]. The bottom width is  $.015 \pm .002$  [0.38 ± 0.05]. The central area is labeled "Anode". A separate dimension shows a height of  $.010 \pm .002$  [0.25 ± 0.05].

Metallization: Top: (anode) AL  
Back: (cathode) Au

AL Thickness: 25,000 Å Minimum

Gold Thickness: 4,000 Å Minimum

Chip Thickness: 10 mils

Circuit Layout Data: For Zener operation, cathode must be operated positive with respect to anode.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.