

# CD914, CD3600, CD4148, CD4150, CD4153, CD4454, CD4531, CD6640, CD6642




## Silicon Switching Diode Chips

Rev. V1

### Features

- All Junctions Completely Protected with Silicon Dioxide

### Die



### Description

These silicon switching diode chips are compatible with all wire bonding and die attach techniques with the exception of solder reflow.

Available in JANHC and JANKC per:

- CD914, CD4148 & CD4531: MIL-PRF-19500/116
- CD4153: MIL-PRF-19500/133
- CD6642: MIL-PRF-19500/578
- CD6640: MIL-PRF-19500/609

### Electrical Specifications: $T_A = +25^\circ\text{C}$ (unless otherwise specified)

TYPE Number	VBR @ 100 $\mu\text{A}$	VRWM	IO	VF1 IF = 10 mA	VF2 IF = 50 mA	VF3 IF = 100 mA	Trr	IR1 @ 20 Vdc	IR2	IR3 @ 20 Vdc TA = 150°C	IR4 TA = 150°C	Capacitance @ 0V	Capacitance @ 1.5 V
	Volts (min)	Volts (pk)	mA	Vdc	Vdc	Vdc	nsec	nA	$\mu\text{A @ V}$	$\mu\text{A}$	$\mu\text{A @ V}$	pF	pF
CD914	100	75	75	0.8	1.2	N/A	5	25	0.5 @ 75	35	75 @ 75	4.0	2.8
CD4148 CD4531	100	75	200	0.8	N/A	1.2	5	25	0.5 @ 75	35	75 @ 75	4.0	2.8
CD6642	100	75	200	0.8	N/A	1.2	5	25	0.5 @ 75	50	100 @ 75	4.0	2.8
CD4454	75	50	200	1.0	N/A	N/A	4	N/A	0.1 @ 50	N/A	100 @ 50	2.0	N/A

TYPE Number	VBR IR = 10 $\mu\text{A}^*$	VRWM	IR1 VR = 50 Vdc	IR2 VR = 50 Vdc TA = 150°C	Capacitance VR = 0; f = 1 MHz; ac signals = 50 mV (p-p)	Trr
	Volts (min)	Volts (pk)	$\mu\text{A Vdc}$	$\mu\text{A Vdc}$	pF	nsec
CD3600	75	50	0.10	100	2.5	4
CD4150	75	50	0.10	100	2.5	4
CD6640	75	50	0.10	90	2.5	4
CD4153	75*	50	0.05	150	2.0	4

\*@ 5  $\mu\text{A}$  for CD4153

Forward Voltage Limits - CD3600, CD4150 and CD6640:

Limits	VF1 IF = 1 mA dc (Pulsed)	VF2 IF = 10 mA dc (Pulsed)	VF3 IF = 50 mA dc (Pulsed)	VF4 IF = 100 mA dc (Pulsed)	VF5 IF = 200 mA dc (Pulsed)
	Vdc	Vdc	Vdc	Vdc	Vdc
minimum	0.540	0.680	0.760	0.820	0.870
maximum	0.620	0.740	0.860	0.920	1.000

Forward Voltage Limits - CD4153:

Limits	VF1 IF = 100 $\mu\text{A}$ dc	VF2 IF = 250 $\mu\text{A}$ dc	VF3 IF = 1 mA dc	VF4 IF = 2 mA dc	VF5 IF = 10 mA dc	VF6 IF = 20 mA dc
	Vdc	Vdc	Vdc	Vdc	Vdc	Vdc
minimum	0.49	0.53	0.59	0.62	0.70	0.74
maximum	0.55	0.59	0.67	0.70	0.81	0.88

1 \* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

# CD914, CD3600, CD4148, CD4150, CD4153, CD4454, CD4531, CD6640, CD6642




## Silicon Switching Diode Chips

Rev. V1


### Absolute Maximum Ratings<sup>1,2</sup>

Parameter	Absolute Maximum
Operating Temperature	-55°C to +175°C
Storage Temperature	-65°C to +175°C

### Forward Current vs. Forward Voltage

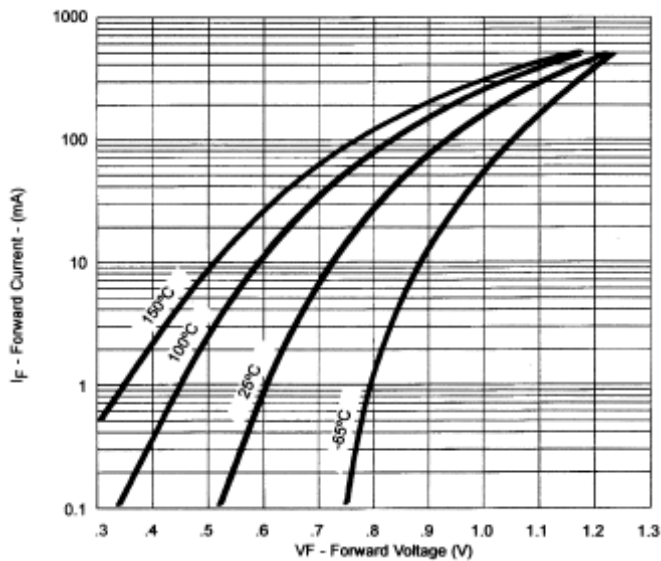


### Reverse Current vs. Reverse Voltage

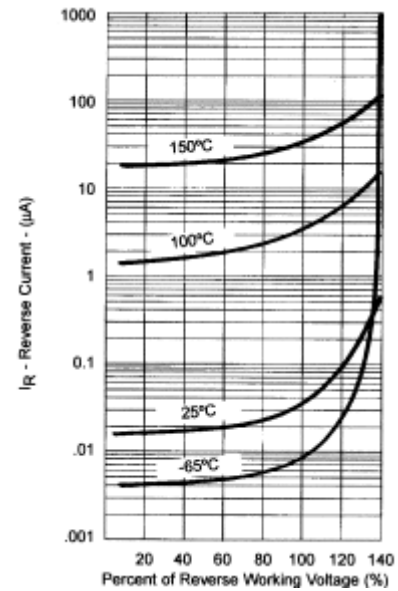

All temperature shown on graphs is junction temperature.

### Die

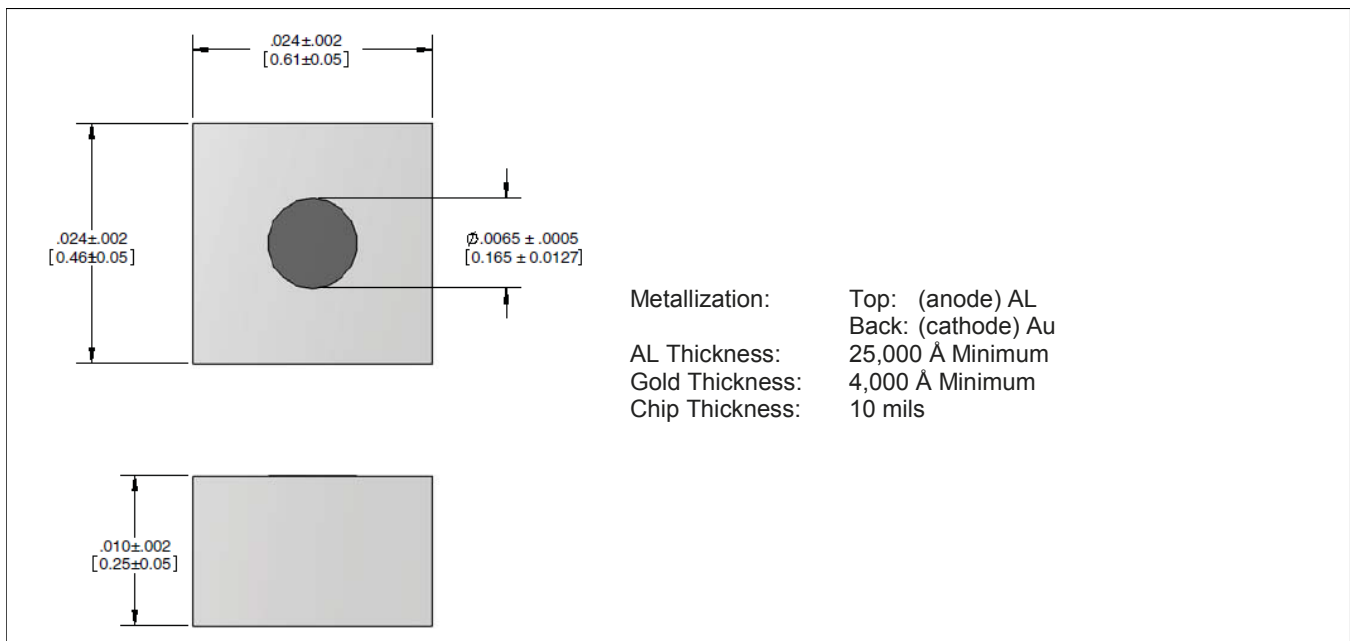

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.