

## Features

- Single 15-dB Step
- Insertion Loss: 0.3 dB @ 1.1 GHz
- 75  $\Omega$  Impedance
- 2.5 to 5.0 Volt Operation
- Positive or Negative Voltage Control
- Lead-Free SOT-25 Package
- Halogen-Free “Green” Mold Compound
- RoHS\* Compliant and 260°C Reflow Compatible

## Description

The MAAD-010305 is a 1-bit, 15-dB step GaAs MMIC digital attenuator in a lead-free SOT-25, 5 lead surface mount plastic package.

The MAAD-010305 is fabricated as a monolithic GaAs integrated circuit using a mature pHEMT process. The process features full chip passivation for performance and reliability.


This device is ideally suited for use where high accuracy, very low power consumption and low intermodulation products are required.

## Ordering Information <sup>1,2</sup>

Part Number	Package
MAAD-010305-TR1000	1000 piece reel
MAAD-010305-TR3000	3000 piece reel
MAAD-010305-001SMB	Sample Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

## Functional Schematic

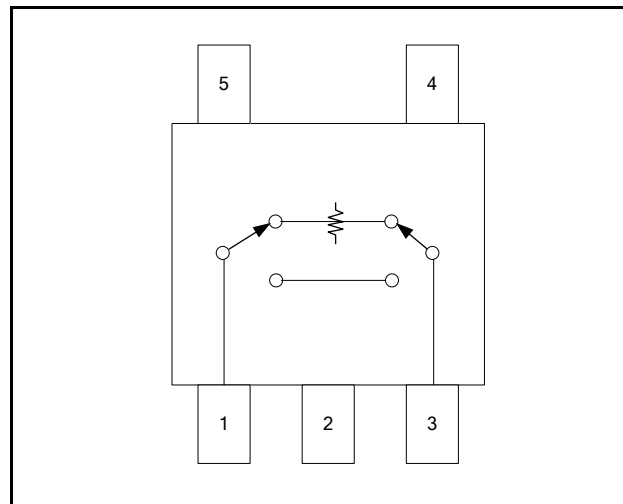

## Pin Configuration

Pin No.	Function
1	RF Input Port
2	Ground
3	RF Output Port
4	V1
5	V2

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**Electrical Specifications<sup>3</sup>:  $T_A = 25^\circ\text{C}$ ,  $V_C = +2.5$  Volts,  $Z_0 = 75 \Omega$**

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss (Reference State)	1.1 GHz	dB	—	0.3	0.45
Attenuation	1.1 GHz	dB	14.6	15.1	15.6
Input Return Loss	DC - 1.1 GHz	dB	—	14	—
Output Return Loss	DC - 1.1 GHz	dB	—	14	—
Input IP3	1.1 GHz Insertion Loss State Attenuation State	dBm	— —	46 46	— —
P1dB	1.1 GHz Insertion Loss State Attenuation State	dBm	— —	20 20	— —
CTB	157 Channels, $P_{IN} = 35$ dBmV/ch.	dBc	—	70	—
CSO	157 Channels, $P_{IN} = 35$ dBmV/ch.	dBc	—	66	—
Trise, Tfall	10% to 90% RF, 90% to 10% RF	ns	—	15	—
Ton, Toff	50% Control to 90% RF, 50% Control to 10% RF	ns	—	20	—
Transients	In-band	mV	—	20	—
Control Current	—	μA	—	—	5

3. For positive voltage control, external DC blocking capacitors are required on all RF ports (pins 1, 2 and 3).

## Absolute Maximum Ratings<sup>4,5</sup>

Parameter	Absolute Maximum
Input Power	+21 dBm
Control Voltage	8 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C


4. Exceeding any one or combination of these limits may cause permanent damage to this device.
5. M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.

## Truth Table


Mode (Control)	V1	V2	Attenuation
Positive <sup>6</sup>	0 ± 0.2V +2.5V to +5V	+2.5V to +5V 0 ± 0.2V	15 dB Reference State
Negative <sup>7</sup>	0 ± 0.2V -2.5V to -5V	-2.5V to -5V 0 ± 0.2V	Reference State 15 dB

6. External DC blocking capacitors are required as noted.
7. If negative control is used, DC blocking capacitors are not required on RF ports and ground.


## Positive Control Voltage Schematic

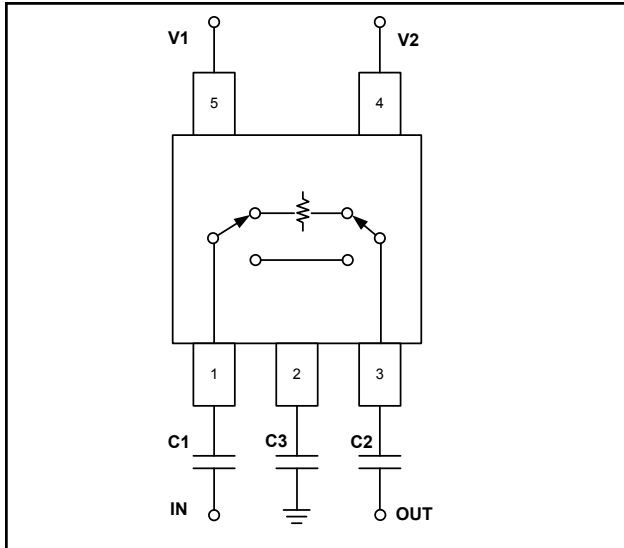

## Recommended PCB Layout

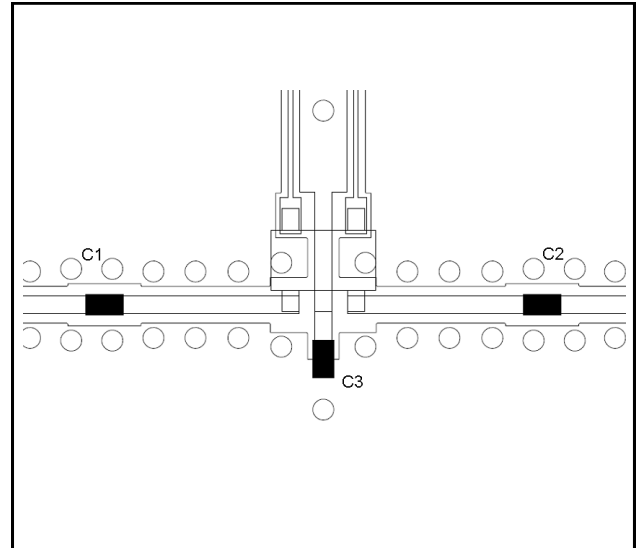

## PCB Land Pattern

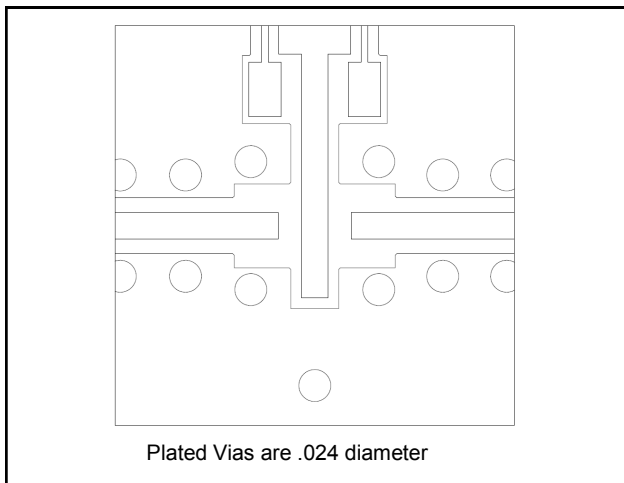

## Handling Procedures


Please observe the following precautions to avoid damage:

## Static Sensitivity


Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Typical Performance Curves with C1,C2,C3 = 0.01 μF, positive or negative mode (control)


**Insertion Loss**

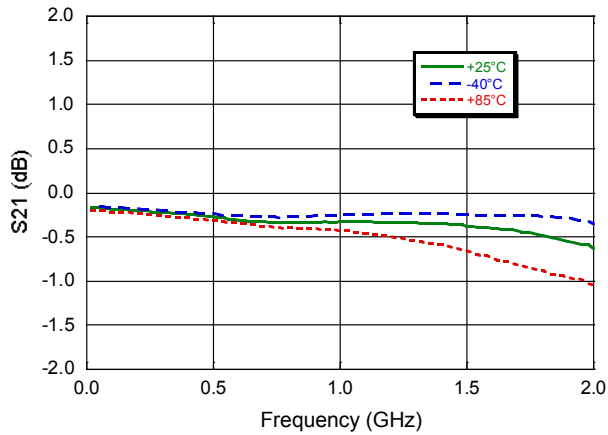


**Relative Attenuation**

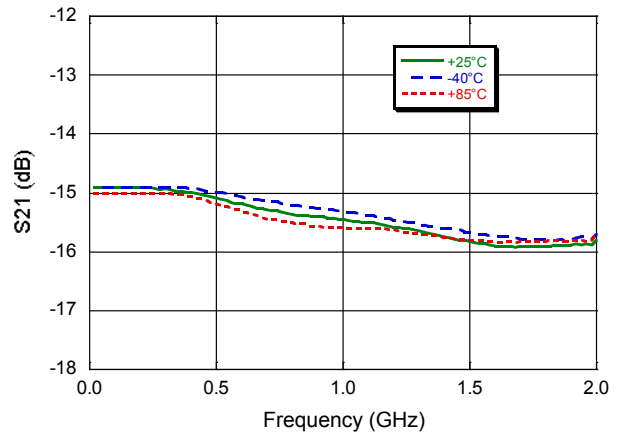


**Input Return Loss**

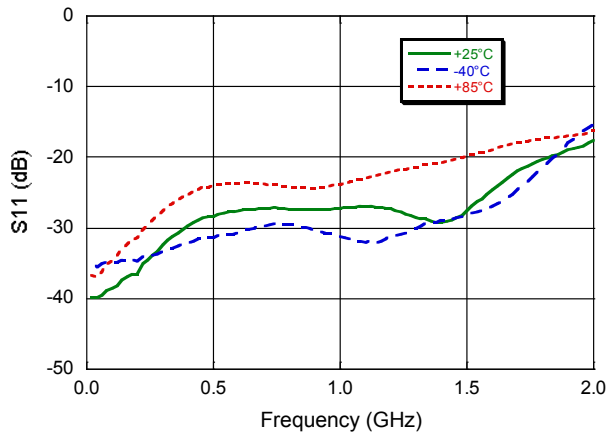


**Input Return Loss\_Full Attenuation**

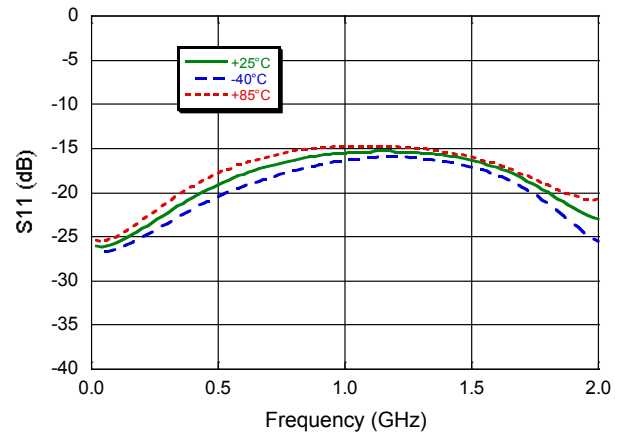


**Output Return Loss**

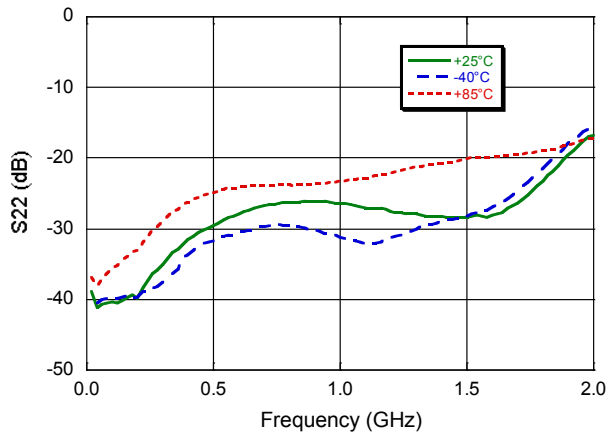

**Output Return Loss\_Full Attenuation**

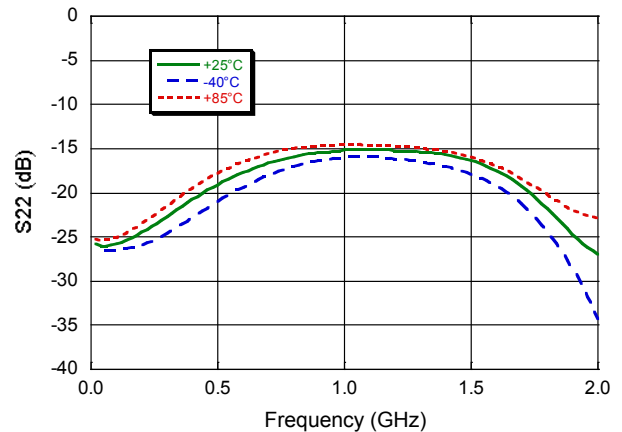

## Lead-Free SOT-25<sup>†</sup>

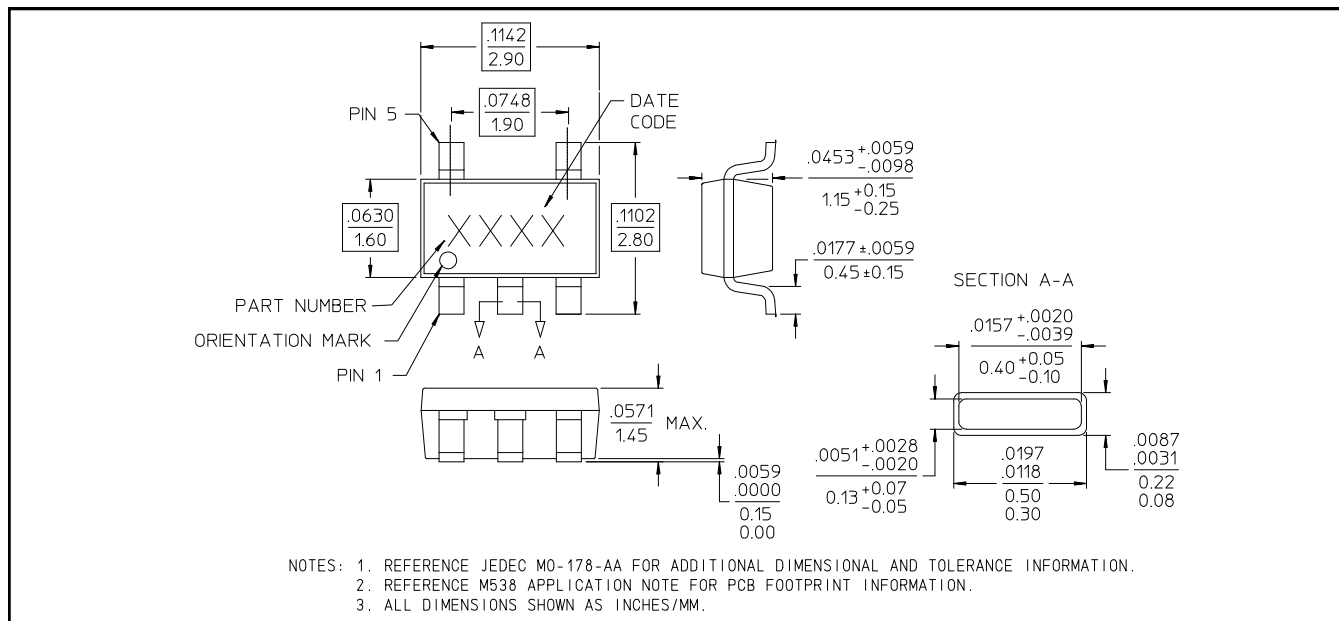

<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.  
 Plating is 100% matte tin over copper.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.