

Broadband CATV Single Ended 3-Way Active Splitter 50 - 1100 MHz

Rev. V1

Features

- 3-Way Splitter
- Single Ended Input and Outputs
- 1.3 dB Gain at output port 1
- 4.5 dB Gain at output ports 2 & 3
- +15 dBmV /Channel Input
- 4.5 dB Noise Figure at output port 1
- 4.0 dB Noise Figure at output ports 2 & 3
- Single +5 Volt Supply
- Lead-Free 2 mm 8-Lead PDFN Package
- Halogen-Free “Green” Mold Compound
- RoHS* Compliant and 260°C Reflow Compatible

Description

M/A-COM’s MAAM-008822 CATV 3-way active splitter is a GaAs MMIC which exhibits low noise figure and distortion in a lead-free 2mm 8-lead PDFN plastic package. The design features 75 Ω inputs and outputs.

The MAAM-008822 is ideally suited for multi-tuner set top boxes, home gateways, and other broadband internet based appliances.


The MAAM-008822 is fabricated using M/A-COM’s PHEMT process to realize low noise and low distortion. The process features full passivation for robust performance and reliability.

Ordering Information ^{1,2}

Part Number	Package
MAAM-008822-TR1000	1000 piece reel
MAAM-008822-TR3000	3000 piece reel
MAAM-008822-001SMB	Sample Test Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

Functional Schematic

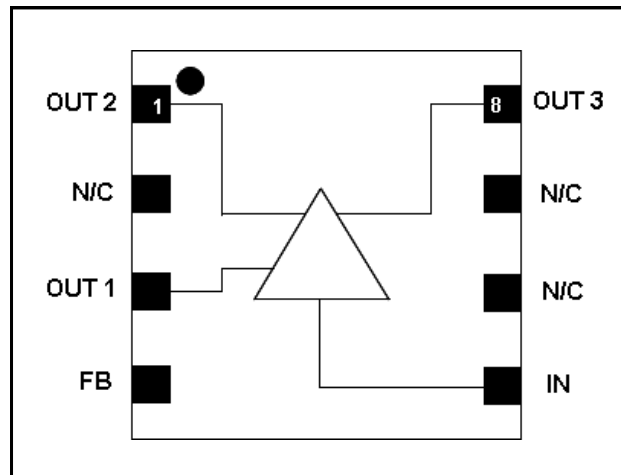

Pin Configuration

Pin No.	Pin Name	Description
1	OUT2	RF Output 2
2	N/C	No Connection
3	OUT1	RF Output 1
4	FB	Feedback/Bias
5	IN	RF Input
6	N/C	No Connection
7	N/C	No Connection
8	OUT3	RF Output 3
9	Paddle ³	RF and DC Ground

3. The exposed pad centered on the package bottom must be connected to RF and DC ground.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Broadband CATV Single Ended 3-Way Active Splitter 50 - 1100 MHz

Rev. V1

Electrical Specifications: Freq. = 1000 MHz, T_A = 25°C, V_{DD} = +5 Volts, Z₀ = 75 Ω

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	IN to OUT1 IN to OUT2, IN to OUT3	dB	1 3	1.3 4.5	3 5.5
Gain Flatness	IN to OUT1, IN to OUT2, IN to OUT3	dB	-	0.5	-
Noise Figure	IN to OUT1 IN to OUT2; IN to OUT3	dB	- -	4.5 4.0	- -
Input Return Loss	IN	dB	-	16	-
Output Return Loss	OUT1 OUT2, OUT3	dB	- -	8 19	- -
Composite Triple Beat, CTB	132 channels, +15 dBmV/channel at the input All Outputs	dBc	-	-63	-
Composite Second Order, CSO	132 channels, +15 dBmV/channel at the input All Outputs	dBc	-	-60	-
Reverse Isolation	OUT1 to IN OUT2 to IN, OUT3 to IN	dB	- -	-30 -27	- -
Output to Output Isolation	OUT1 to OUT2; OUT1 to OUT3 OUT2 to OUT3	dB	- -	21 18	- -
Output Power at 1dB Compression, P1dB	OUT1 OUT2, OUT3	dBm	- -	7.5 11	- -
Output 3rd Order Intercept Point, OIP3	500 MHz, 2-tone, 6 MHz spacing, -15 dBm Pout OUT1 OUT2, OUT3	dBm	- -	23 24	- -
Output 2nd Order Intercept Point, OIP2	500 MHz, 2-tone, 6 MHz spacing, -15 dBm Pout OUT1 OUT2, OUT3	dBm	- -	45 48	- -
IDD	VDD= +5 Volts	mA	-	120	150

Absolute Maximum Ratings ^{4,5,6,7}

Parameter	Absolute Maximum
Max Input Power	+12 dBm
Vbias	+10.0 V
Operating Temperature	-20°C to +85°C
Junction Temperature	150°C
Storage Temperature	-65°C to +150°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.
- These operating conditions will ensure MTTF > 1 x 10⁶ hours.
- Junction Temperature (T_J) = T_C + Θ_{JC} * ((V * I) - (P_{OUT} - P_{IN}))
Typical thermal resistance (Θ_{JC}) = 77° C/W.
 - For T_C = 25°C,
T_J = 71 °C @ 5 V, 120 mA
 - For T_C = 85°C,
T_J = 127 °C @ 5 V, 110 mA

Handling Procedures

Please observe the following precautions to avoid damage:


Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.


Broadband CATV Single Ended 3-Way Active Splitter 50 - 1100 MHz

Rev. V1


Recommended PCB

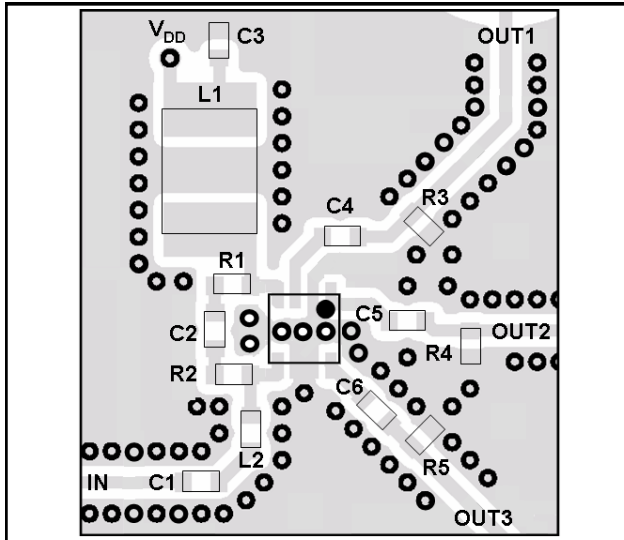

PCB Land Pattern

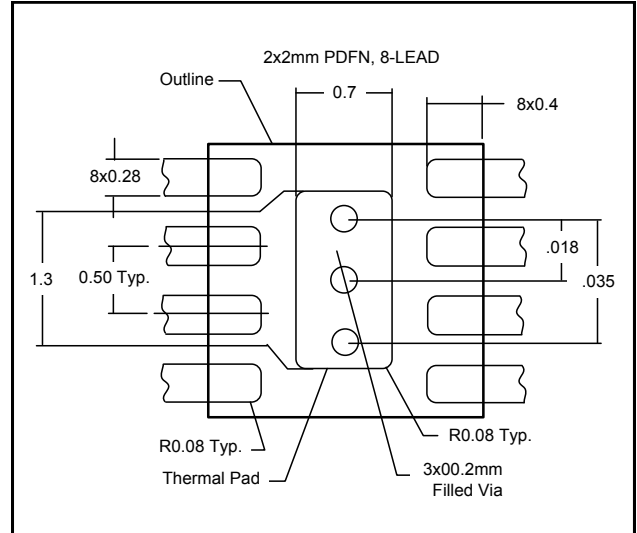

Schematic Including Off-Chip Components⁸

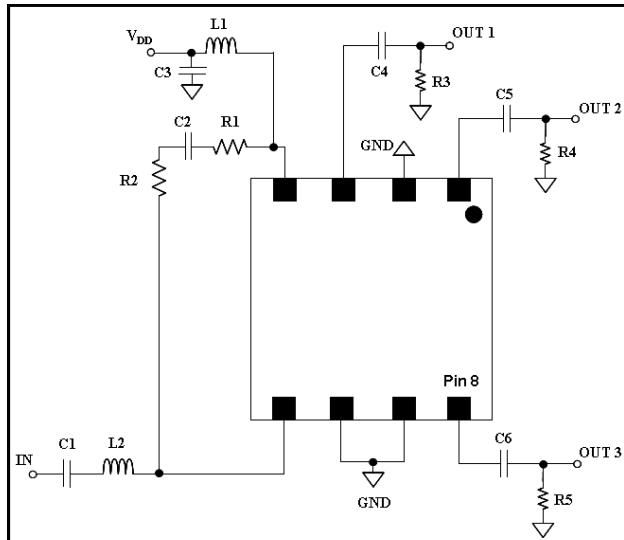

8. The exposed pad centered on the package bottom must be connected to ground for RF, DC and thermal considerations.


Off-Chip Component Values⁹

Component	Value	Package
C1 - C6	0.01 μ F	0402
L1 ⁷	1 μ H	1210
L2	3.9 nH	0402
R1, R2	180 ohm	0402
R3	750 ohm	0402
R4, R5	270 ohm	0402


9. L1 supplied from EPCOS, part number B82422A1102K100.

Typical Performance Curves


Gain to 1100 MHz__OUT1

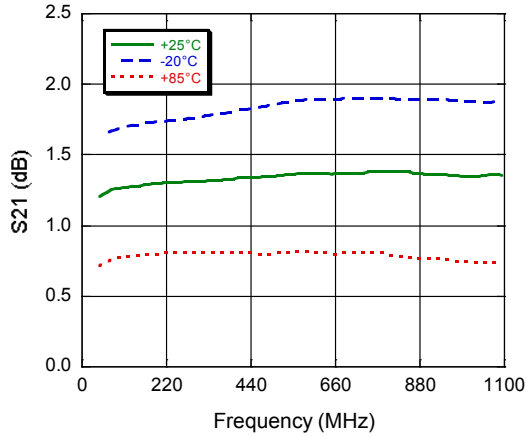


Gain to 1100 MHz__OUT2 & OUT3

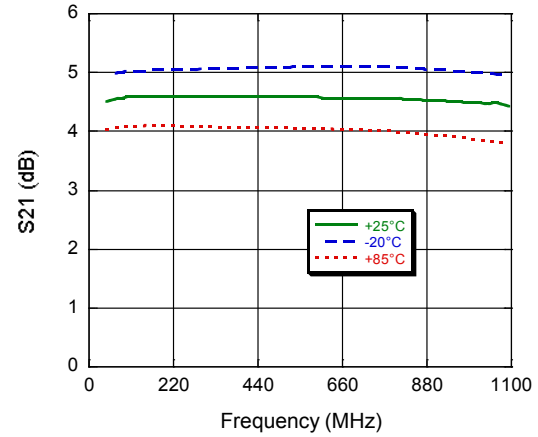


Gain to 3000 MHz__OUT1

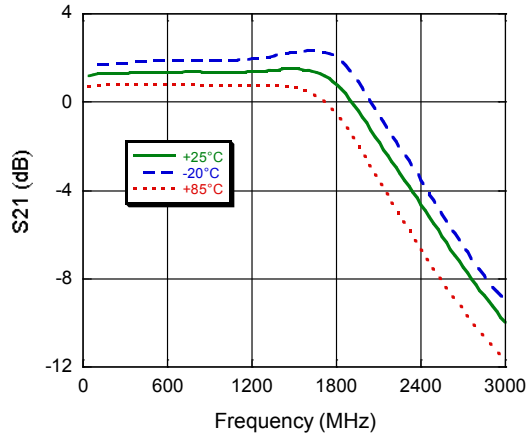


Gain to 3000 MHz__OUT2 & OUT3

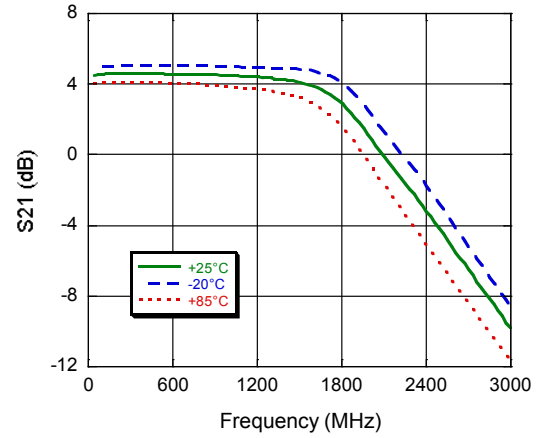

Noise Figure__OUT1

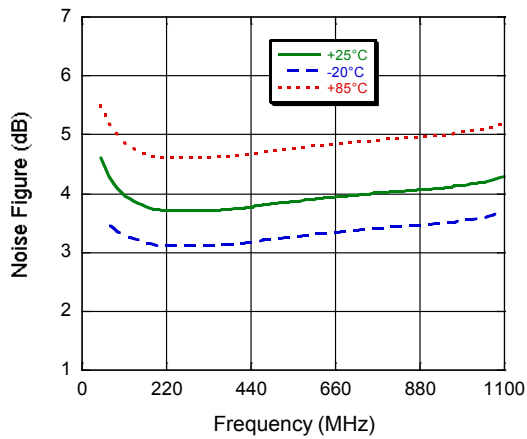


Noise Figure__OUT2 & OUT3

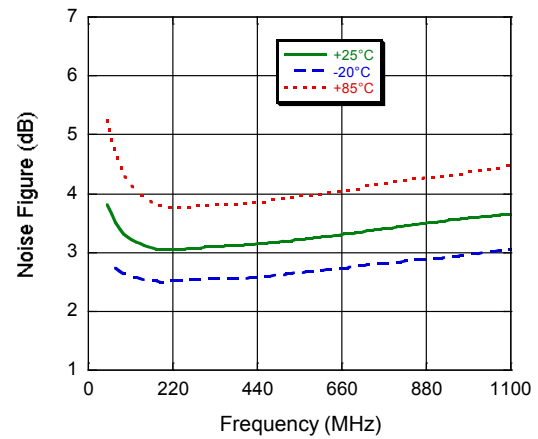


Typical Performance Curves


Input Return Loss

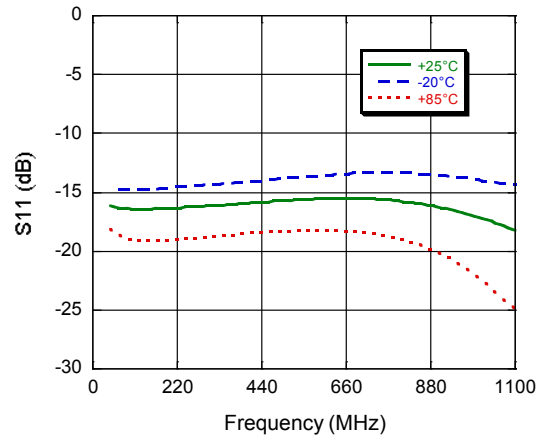


Output Return Loss__OUT1

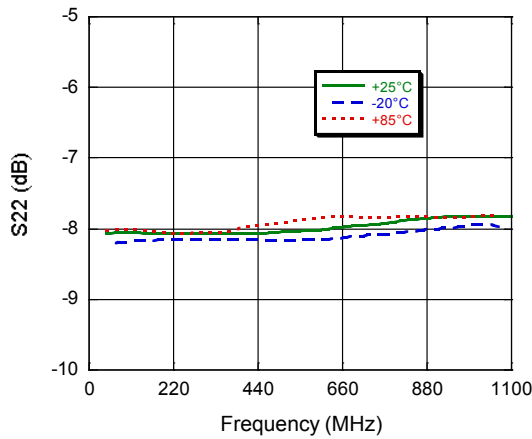


Output Return Loss__OUT2 & OUT3

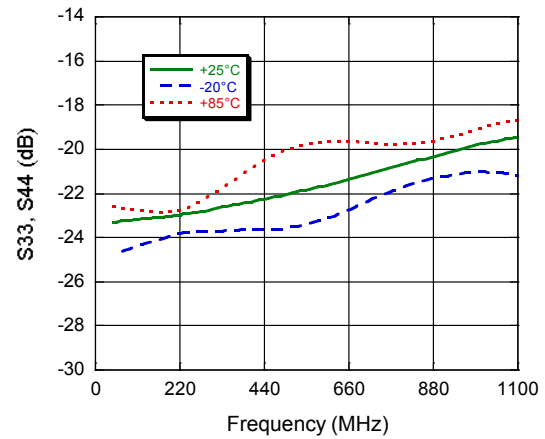

Reverse Isolation__OUT1-IN

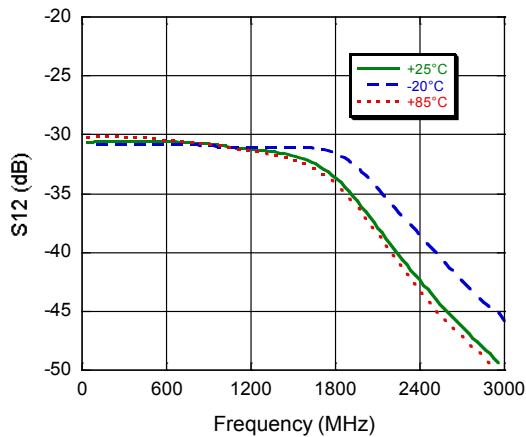


Reverse Isolation__OUT2-IN & OUT3-IN

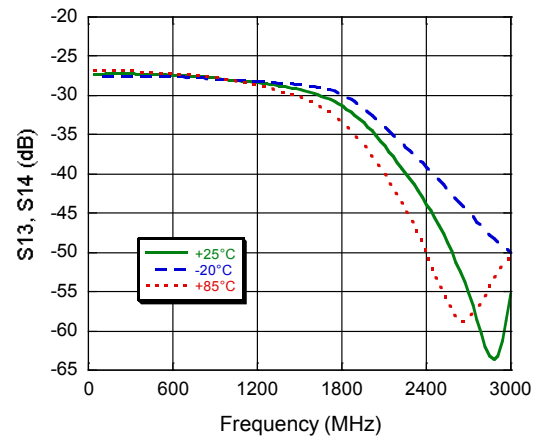


Typical Performance Curves


OUT-OUT Isolation to 1100 MHz
OUT2-OUT3

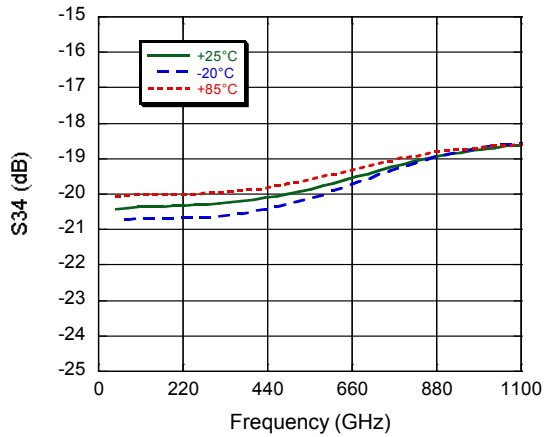


OUT-OUT Isolation to 1100 MHz
OUT1-OUT2 & OUT1-OUT3

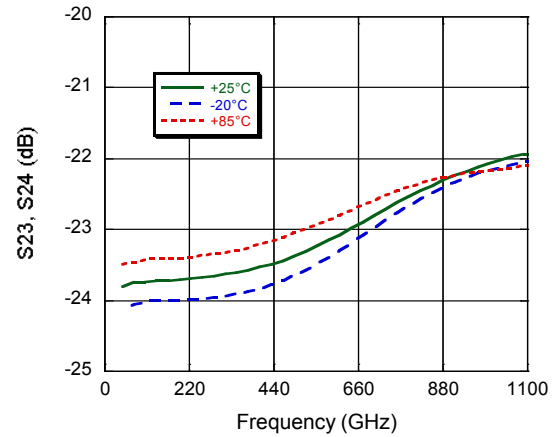

OUT-OUT Isolation to 3000 MHz
OUT2-OUT3

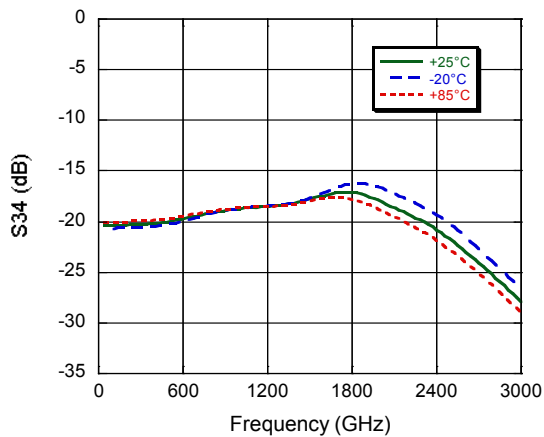


OUT-OUT Isolation to 3000 MHz
OUT1-OUT2 & OUT1-OUT3

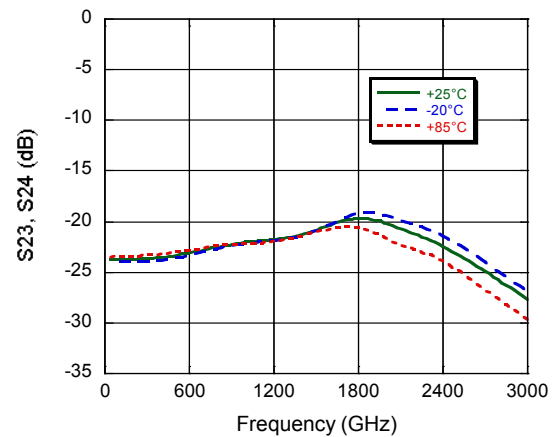

Broadband CATV Single Ended 3-Way Active Splitter 50 - 1100 MHz

Rev. V1

Lead-Free 2 mm 8-Lead PDFN[†]

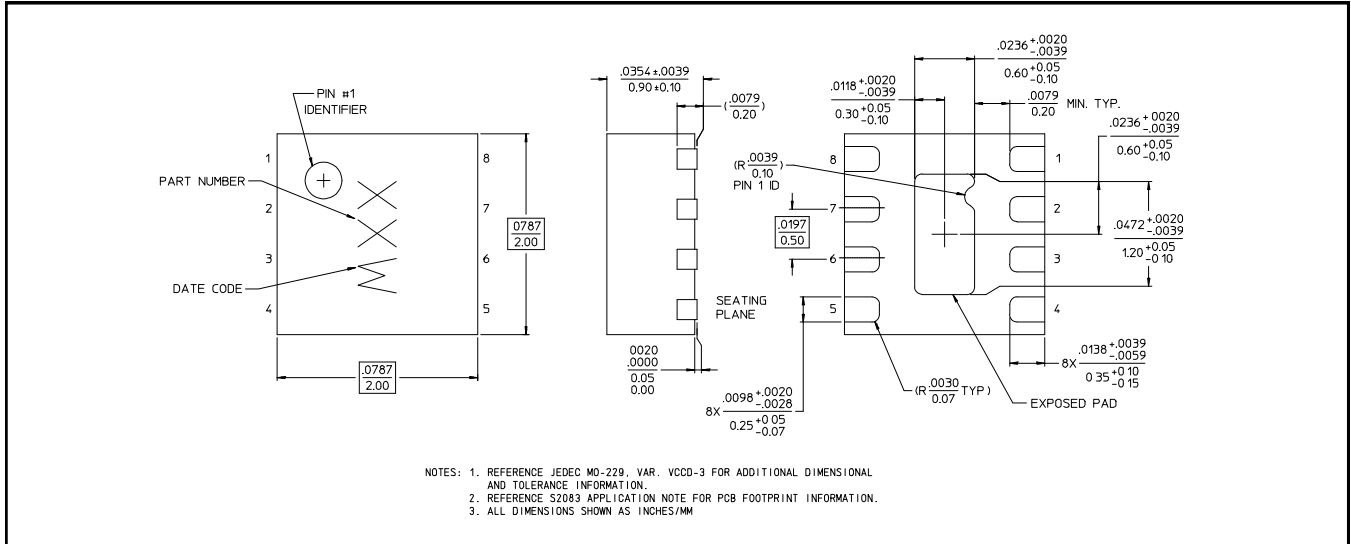

[†] Reference Application Note M538 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 1 requirements.
Plating is 100% matte tin over copper.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.