

Features

- Cascadable 50 Ω Gain Block
- 3dB Bandwidth: DC to 1 GHz
- 16 dB Typical Gain @ 0.5 GHz
- Unconditionally Stable ($k > 1$)
- 370 x 370 x 120 μm
- RoHS* Compliant

Applications

- Narrow and Wide Band IF and RF Amplifiers
- Industrial
- Military

Description

The MAAM-011041 is a high performance silicon bipolar MMIC chip. This amplifier is ideally suited for use where a general purpose 50 Ω gain block is required. Typical applications include narrow and wide band IF and RF amplifiers in industrial and military applications.


The MAAM-011041 is fabricated using a 10 GHz f_T silicon bipolar technology that features gold metallization and IC passivation for increased performance and reliability.

Ordering Information

Part Number	Package
MAAM-011041-DIE	Gel Pack ¹

1. Die quantity varies.

Functional Schematic

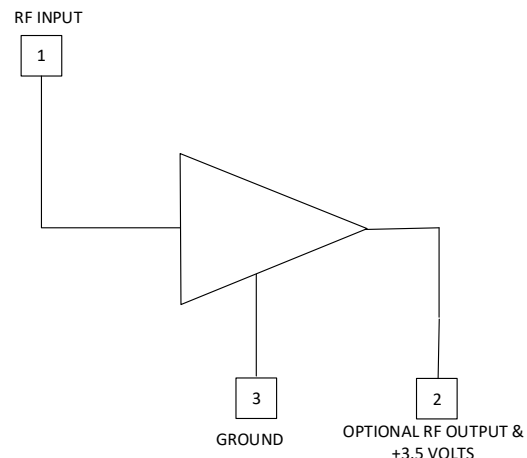

Pad Configuration

Pad	Function	Comment
1	RF Input	—
2	RF Output and Bias ²	Optional RF Output and +5.5 Volts
3	Ground	—

2. RF output Contact & +DC Voltage Is Normally Made On Back-side Of Chip At Die Attach

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Electrical Specifications: $T_A = 25^\circ\text{C}$, $I_D = 35\text{ mA}$, $Z_0 = 50\ \Omega$


Parameter	Freq	Units	Min.	Typ.	Max.
Power Gain ($ S_{21} ^2$)	0.1 GHz	dB	—	16	—
Gain Flatness	0.1 - 1.0 GHz	dB	—	± 1.8	—
3 dB Bandwidth	—	GHz	—	1	—
Input Return Loss	0.05 - 1 GHz	dB	—	18	—
Output Return Loss	0.05 - 1 GHz	dB	—	20	—
Power Output at 1 dB Gain Compression	1 GHz	dBm	—	7	—
Noise Figure	1 GHz, 50 Ω	dB	—	3.5	—
Third Order Intercept Point	1 GHz	dBm	—	14	—
Group Delay	1 GHz	ps	—	149	—
Device Voltage	—	V	2.7	3.3	3.9
Device Voltage Temperature Coefficient	—	mV/ $^\circ\text{C}$	—	-5.0	—

Absolute Maximum Ratings^{3,4}

Parameter	Absolute Maximum
Device Current	70 mA
Junction Temperature ^{5,6}	+200 $^\circ\text{C}$
Storage Temperature	-65 $^\circ\text{C}$ to +150 $^\circ\text{C}$
Power Dissipation ⁷	280 mW
RF Input Power	6 dBm

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.
- Operating at nominal conditions with $T_J \leq +150^\circ\text{C}$ will ensure $\text{MTTF} > 1 \times 10^6$ hours.
- Junction Temperature (T_J) = $T_C + \Theta_{jc} * (V * I)$
Typical thermal resistance (Θ_{jc}) = 215 $^\circ\text{C}/\text{W}$.
 - For $T_C = +25^\circ\text{C}$,
 $T_J = 85.2^\circ\text{C}$ @ 4 V, 70 mA
 - For $T_C = +100^\circ\text{C}$,
 $T_J = 160.2^\circ\text{C}$ @ 4 V, 70 mA
- Derate at 4.7 mW/ $^\circ\text{C}$ for $T_c > 140^\circ\text{C}$

Typical Bias Configuration

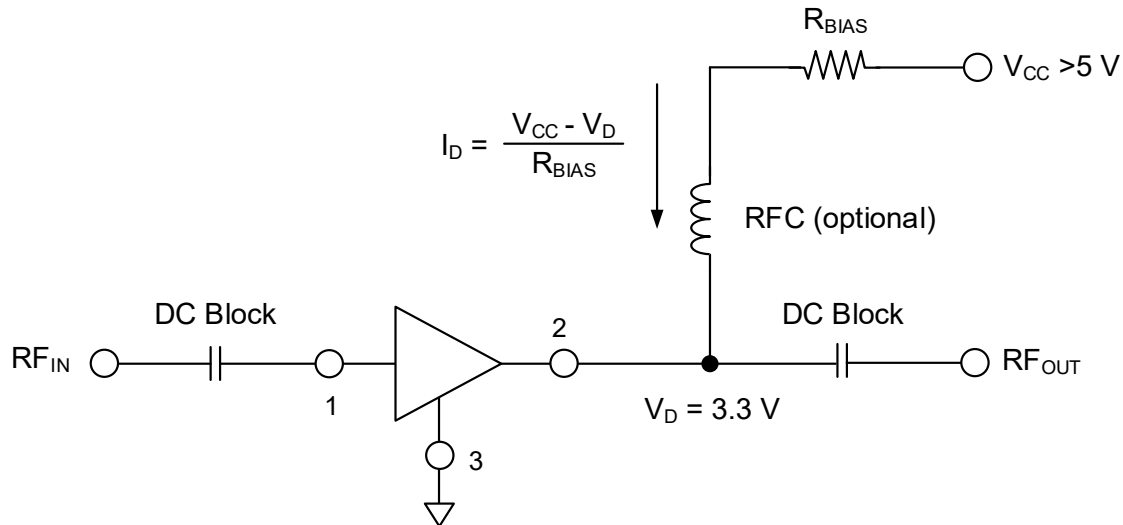

Handling Procedures


Please observe the following precautions to avoid damage:

Static Sensitivity


These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these Class 1B (500 V) HBM devices.

Typical S-Parameters: $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$


Gain

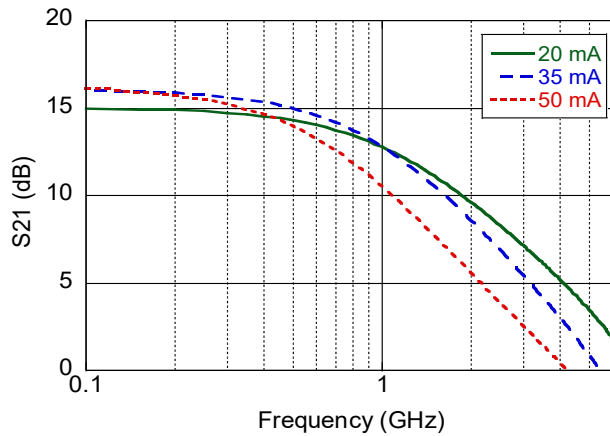


Input Return Loss

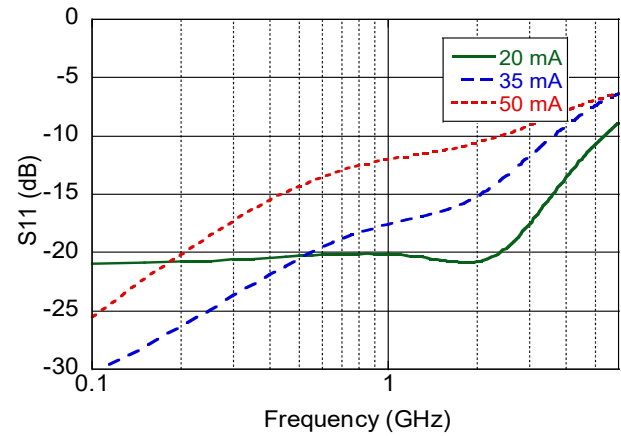

Output Return Loss

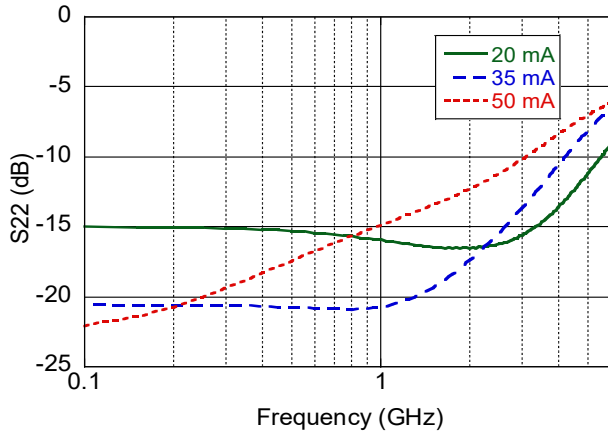


Reverse Isolation

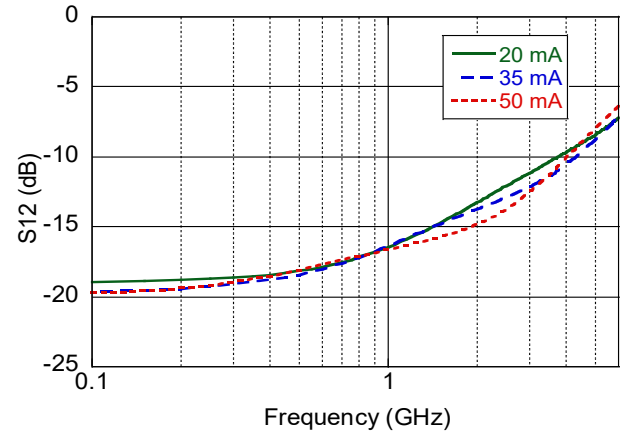


Typical Performance: $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$


P1dB

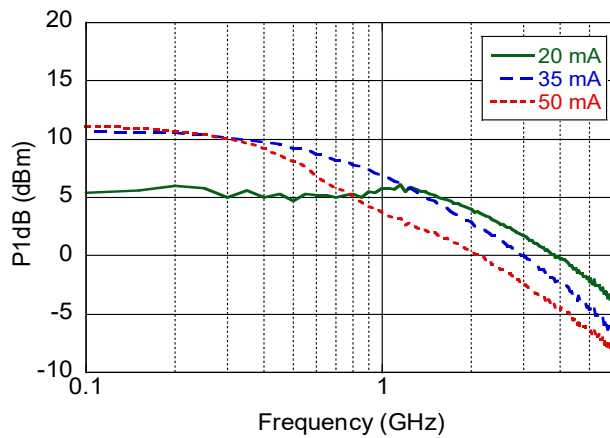


Output 3rd Order Intercept Point

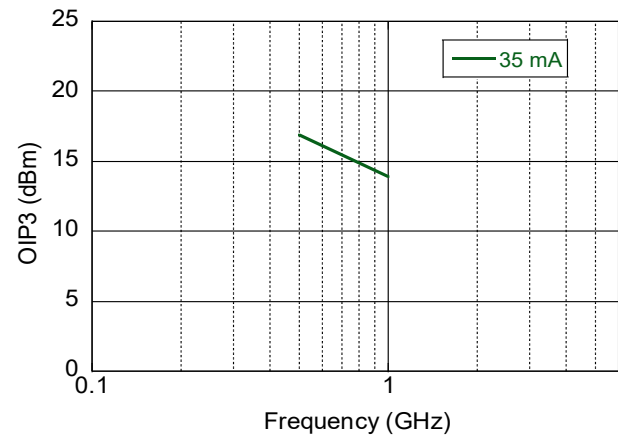

Noise Figure

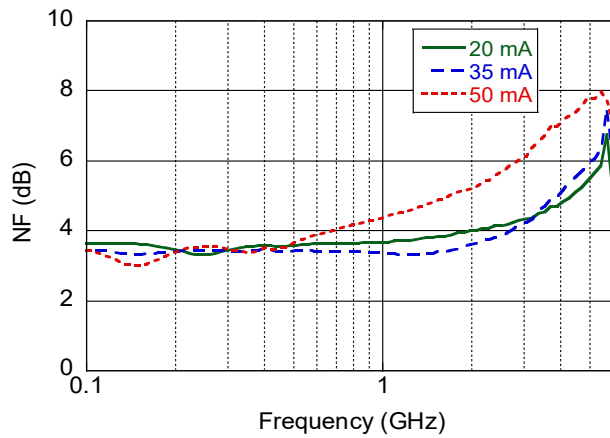

Bias Current vs Voltage

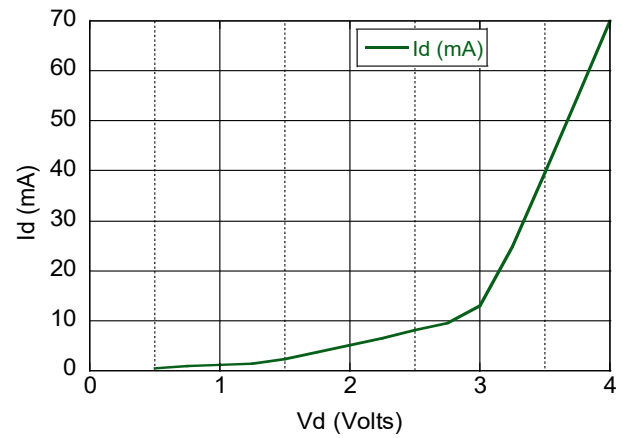


Silicon Bipolar MMIC Cascadable Amplifier DC - 1 GHz




MAAM-011041

Rev. V1

Schematic and Model

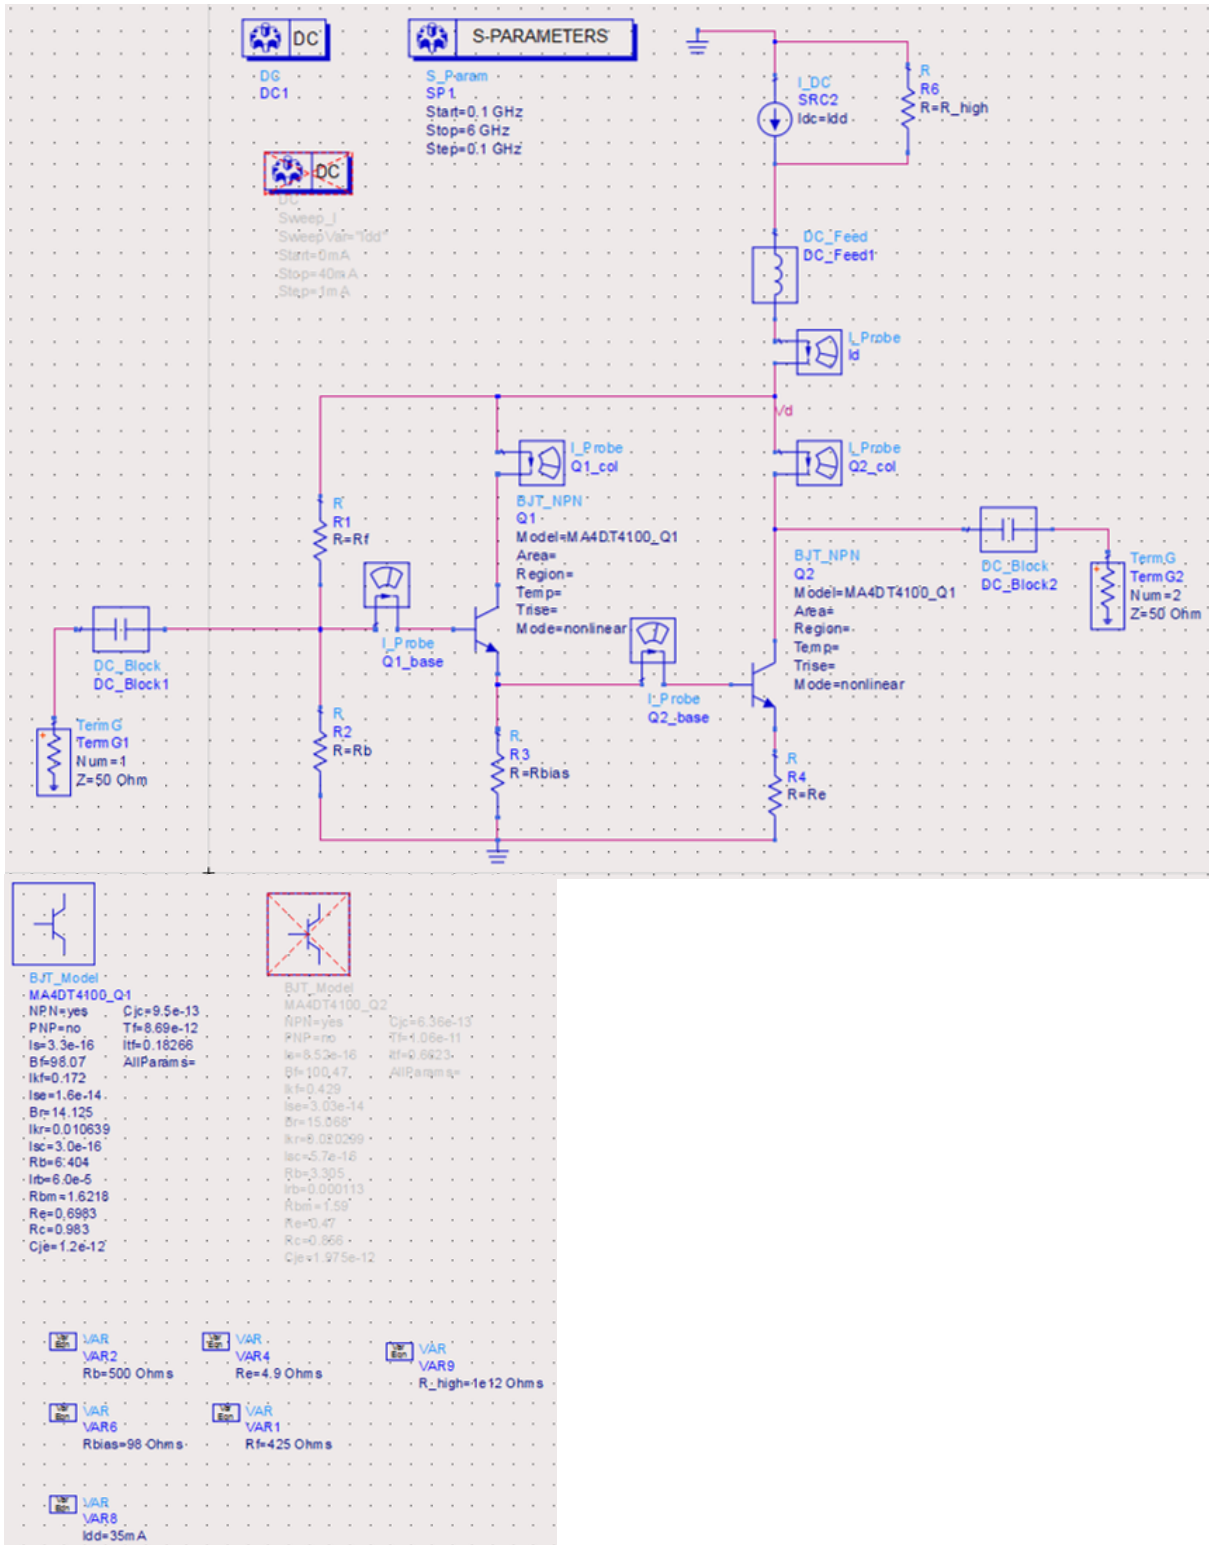

Chip Outline Drawing

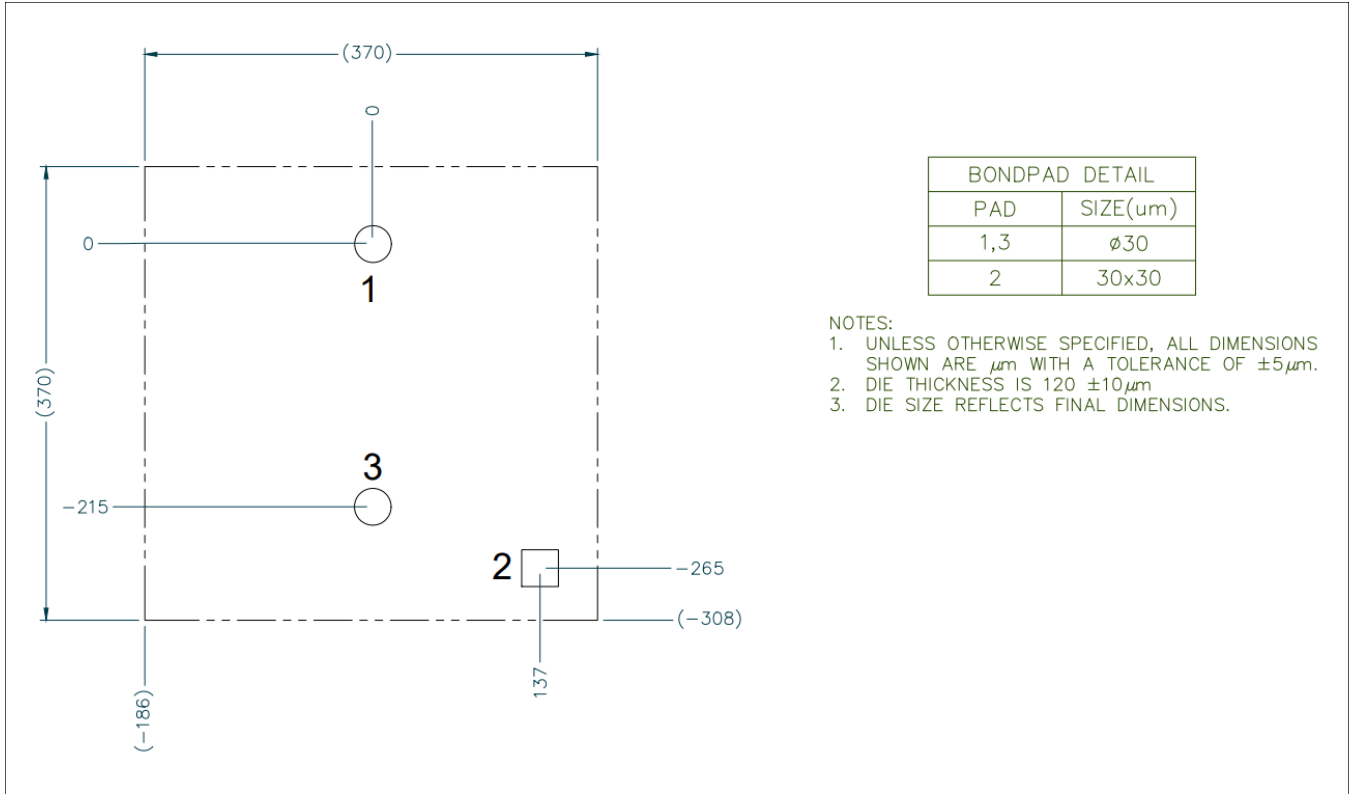

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.