

Features

- Linear Output Power: 33 dBm
- Gain with Saw Filter on Input: 30 dB
- ACPR = -34.0 dBc @ 41.67 kHz offset, $P_{OUT} = 33$ dBm
- High PAE: >30%
- Integrated Active Bias Circuit
- Power-Down Function
- InGaP HBT device technology
- Rugged single supply power amplifier design
- High Peak-Power Efficiency
- Lead-Free 6 mm 12-Lead LGA package
- Halogen-Free “Green” Mold Compound
- RoHS* Compliant and 260°C Reflow Compatible

Description


The MAAP-011060 is a power amplifier module assembled in a 6 mm land grid array (LGA) that is self-contained with 50 Ω input and output terminals. The input and output ports are also DC blocked.

This device utilizes a GaAs HBT process for optimal 5 V performance in 1.6 GHz satellite applications.

Ordering Information

Part Number	Package
MAAP-011060	Bulk Packaging
MAAP-011060-TR0500	500 Piece Reel
MAAP-011060-001SMB	Sample Test Board

Functional Schematic

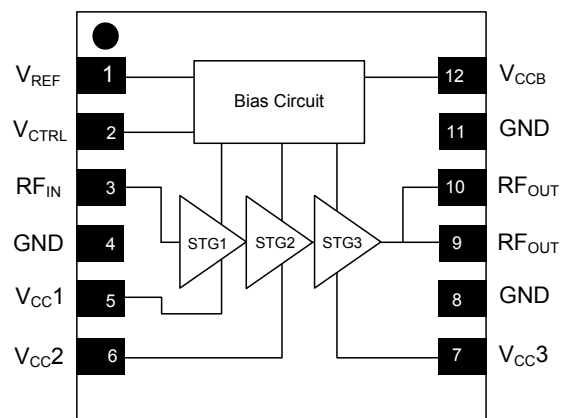

Pin Configuration

Pin No.	Pin Name	Description
1	V_{REF}	Reference Voltage
2	V_{CTRL}	Control Voltage
3	RF_{IN}	RF Input
4	GND	Ground
5	V_{CC1}	Supply Voltage 1
6	V_{CC2}	Supply Voltage 2
7	V_{CC3}	Supply Voltage 3
8	GND	Ground
9	RF_{OUT}	RF Output
10	RF_{OUT}	RF Output
11	GND	Ground
12	V_{CCB}	Supply Voltage Bias Circuit
Paddle ¹		RF and DC Ground

1. The exposed pad centered on the package bottom must be connected to RF, DC and thermal ground.

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

Power Amplifier Module 1616 - 1626.5 MHz, 2 Watts

Rev. V3

Electrical Specifications:

Freq: 1621.25 MHz, $V_{CC} = 5\text{ V}$, $V_{REF} = 3\text{ V}$, $V_{ctrl} = 1.35\text{ V}$, $T_A = 25^\circ\text{C}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Rated Output Power	$V_{CC} = 5\text{ Volts}, 5.5\text{ Volts}$ $V_{CC} = 4.5\text{ Volts}$	dBm	33 32.6	33 32	—
Gain @ Rated pout	VSWR = 1:1	dB	30	30.5	—
Gain Variation over Freq	VSWR = 1:1, 1616 MHz - 1626.5 MHz	dB	-2	+/-0.5	2
Gain Variation over Temperature	VSWR = 1:1	dB	-2	+/-2.5	2
Gain Variation vs. Load Phase Angle	VSWR = 1.7:1	dB	-2	+/-1	2
Harmonic Suppression Power	Freq = $2f_0, 3f_0$	dBm	—	-16	—
Adjacent Channel Power	+/- 41.67 kHz offset, $BW^2 = 41.67\text{ kHz @ Rated Pout}$	dBc	—	-35	-30
Adjacent Channel Power, Extreme Conditions	+/- 41.67 kHz offset, $BW = 25\text{ kHz @ Rated Pout}$, Over Freq. and Temp. Range, VSWR = 1.7:1	dBc	—	-28	-27
Alternate Channel Power	+/- 83.33 kHz offset, $BW^2 = 41.67\text{ kHz @ Rated Pout}$	dBc	—	-47	-44
Power Added Efficiency	@ Rated Pout	%	27	30	—
Pulse Period	—	ms	—	8.28	—
Pulse Duty Cycle	—	ms	—	90	—
Reference Voltage Sink Current	—	mA	—	6.5	10

2. Using DQPSK Signal with PAR = 2.78 dB, main channel BW = 41.67 kHz

Absolute Maximum Ratings^{3,4,5}

Parameter	Absolute Maximum
DC Supply Voltage	5.5 V
RF Input Power	9 dBm
Junction Temperature ⁶	150°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +150°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.
- Operating at nominal conditions with $T_J \leq +150^\circ\text{C}$ will ensure $MTTF > 1 \times 10^6$ hours.
- Junction Temperature (T_J) = $T_C + \Theta_{jc} * ((V * I) - (P_{OUT} - P_{IN}))$
Typical thermal resistance (Θ_{jc}) = 10.8° C/W.
 - For $T_C = 25^\circ\text{C}$,
 $T_J = 74^\circ\text{C @ } 5\text{ V}, 1300\text{ mA}$
 - For $T_C = 85^\circ\text{C}$,
 $T_J = 134^\circ\text{C @ } 5\text{ V}, 1300\text{ mA}$

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity


Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these Class 1B devices.

Power Amplifier Module 1616 - 1626.5 MHz, 2 Watts


Rev. V3

Typical Performance Curves: DQPSK Signal with 2.78 dB PAR


Gain vs. Pout over Temperature

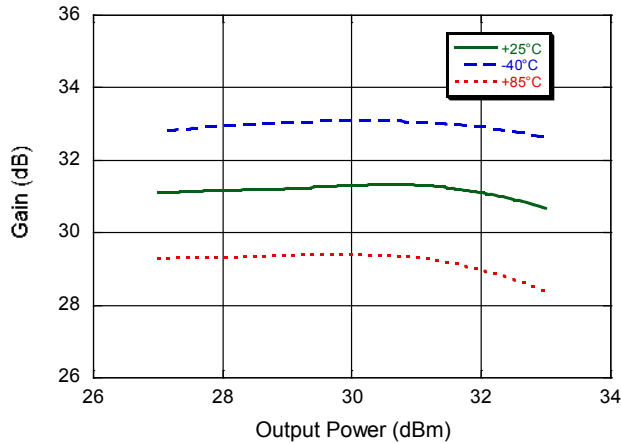


Gain vs. Pout over Frequency Band

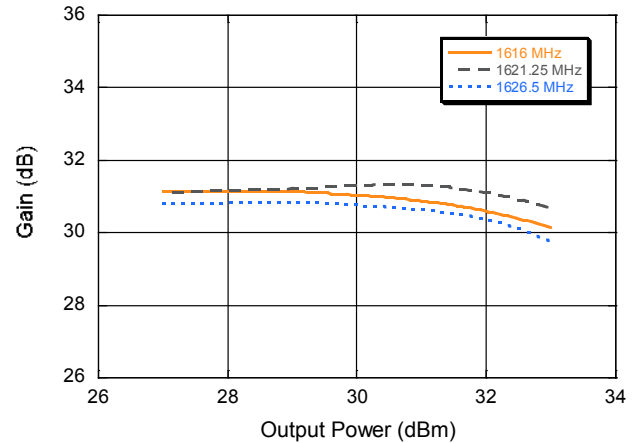


Adjacent Channel Power vs. Pout over Temperature

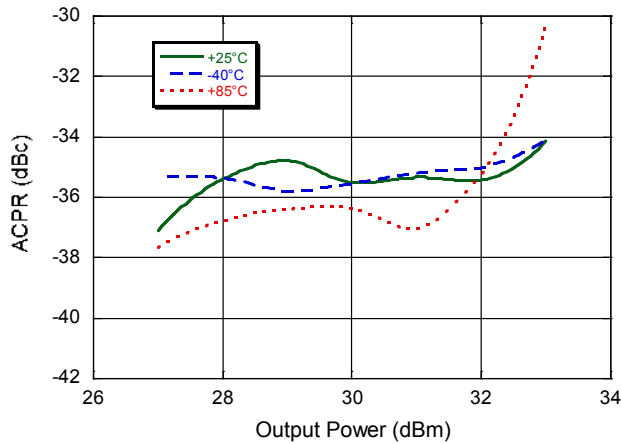


Adjacent Channel Power vs. Pout over Frequency Band

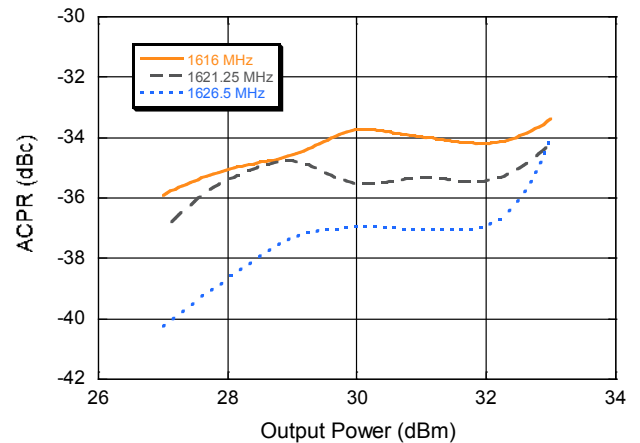


Alternate Channel Power vs. Pout over Temperature

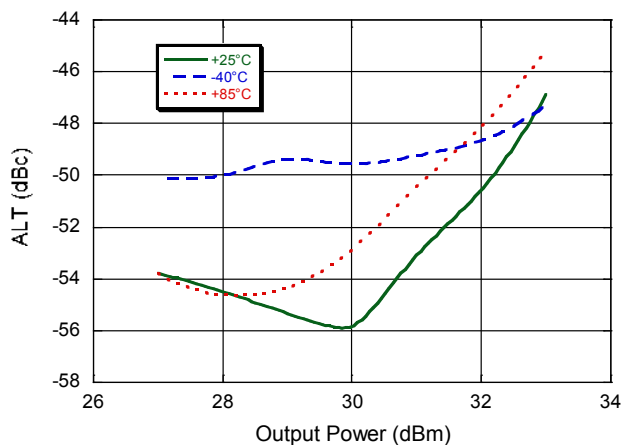

Alternate Channel Power vs. Pout over Frequency Band

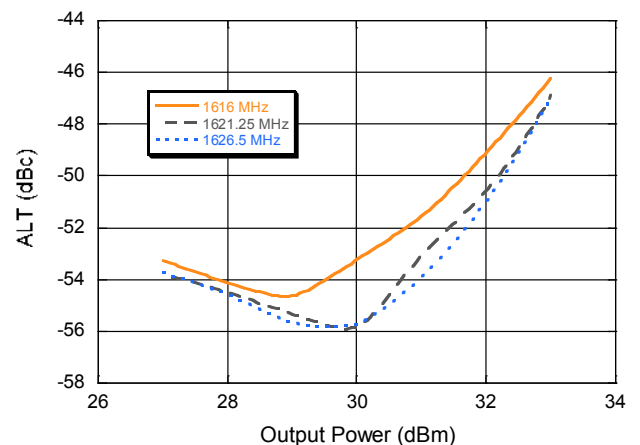

Lead Free 6 mm 12-lead LGA[†]

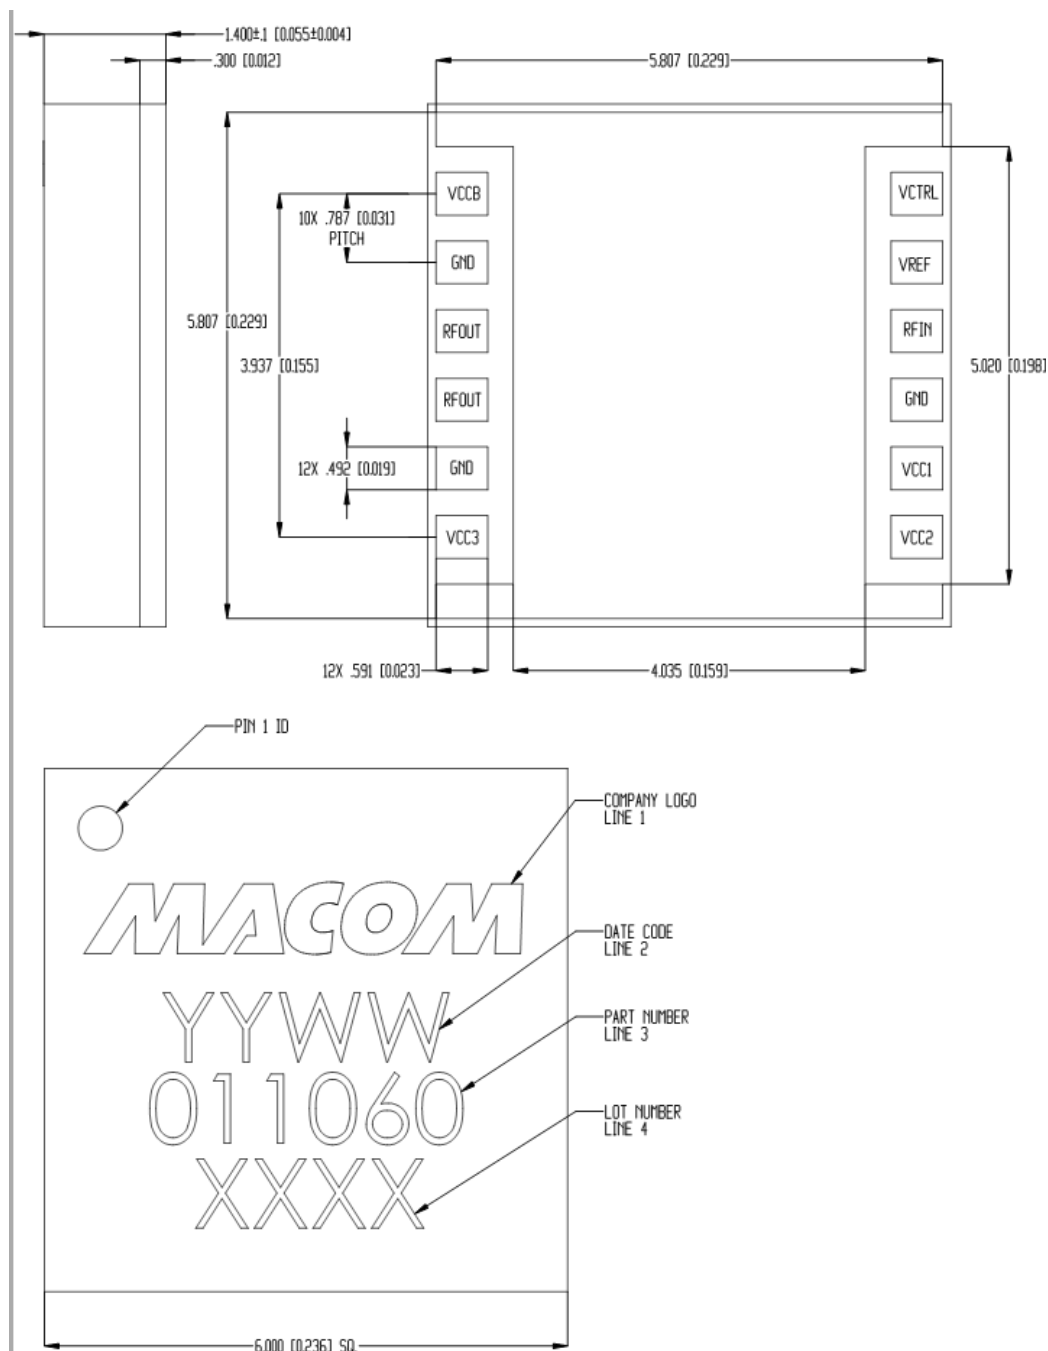

[†] Reference Application Note S2083 for lead-free solder reflow recommendations.
 Meets JEDEC moisture sensitivity level 3 requirements.

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.