

4:1 Step-down Flux Coupled Transformer 5 - 200 MHz

Rev. V2

Features



- 4:1 Step-down Flux Coupled
- Surface Mount Package
- All Wires are Welded to the PCB Carrier
- 260°C Reflow Compatible
- RoHS v Compliant

Description

The MABA-008354-CF4A40 is a 4:1 flux coupled step down transformer in a surface mount package.

Ideally suited for high volume CATV/Broadband applications. Suitable for use in 50 Ω and 75 Ω systems.

Schematic



Pin Configuration

Pin #	Function
1	Secondary Dot (output 1)
2	Centre Tap
3	Secondary (output 2)
4	Primary Dot (input)
5	Primary (ground)

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{IN} = 0 \text{ dBm}$

Parameter	Frequency	Units	Min.	Typ.	Max.
Insertion Loss	5 - 35 MHz	dB	—	0.8	1.1
	35 - 85 MHz			1.1	1.6
	85 - 200 MHz			2.2	3.6
Amplitude Balance	5 - 85 MHz	dB	—	± 0.01	± 0.4
	5 - 200 MHz			± 0.09	± 0.8
Phase Balance	5 - 85 MHz	°	—	± 0.2	± 4
	85 - 200 MHz			± 0.4	± 5
Input Return Loss	5 - 35 MHz	dB	15	19	—
	35 - 85 MHz		10	13	
	85 - 200 MHz		5	8	

Ordering Information

Part #	Description
MABA-008354-CF4A40	2000 piece reel
MABA-008354-CF4ATB	customer test board

Reference Application Note **M513** for reel size information.

Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	1 W
DC current	250 mA per arm
Operating Temperature	-40°C to +60°C
Storage Temperature	-40°C to +85°C

4:1 Step-down Flux Coupled Transformer 5 - 200 MHz


Rev. V2

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{IN} = 0 \text{ dBm}$


Insertion Loss 1 (pin 4 - pin 1)

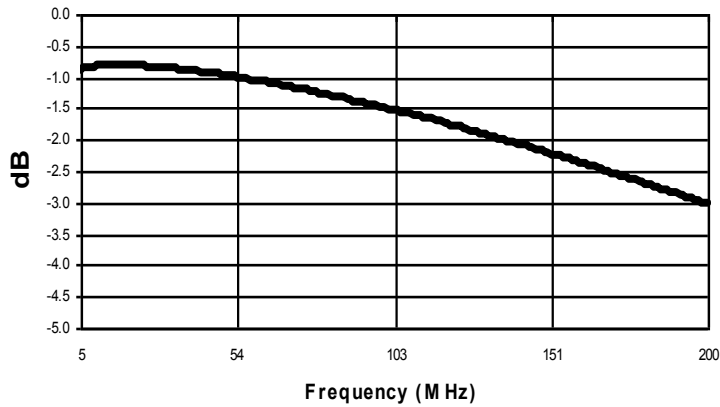


Insertion Loss 2 (pin 4 - pin 3)

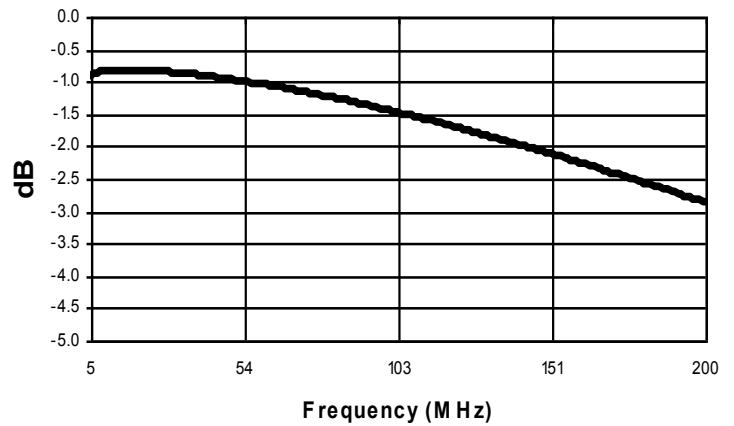


Amplitude Balance

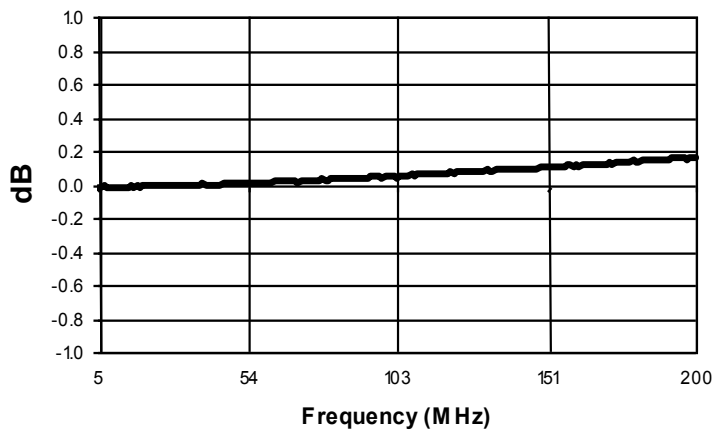


Phase Balance

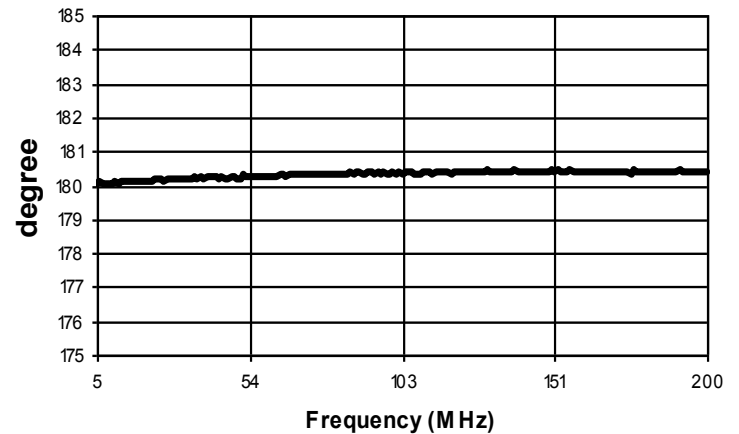

Return Loss: Input

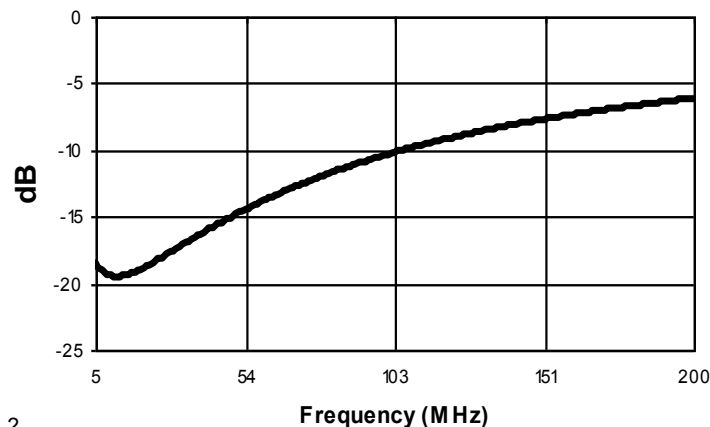

Outline Drawing (SM-164)

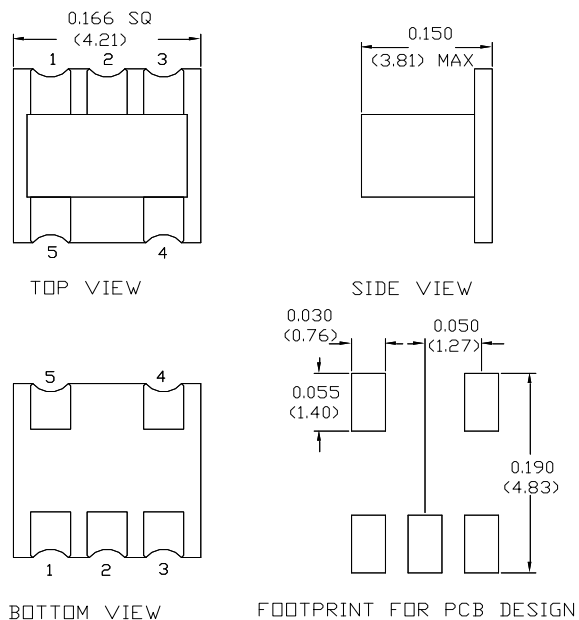

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010, unless otherwise stated

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.