

## 1:1 Transmission Line Transformer 50 - 1200 MHz

Rev. V4

### Features


- Surface Mount Technology
- 1:1 Impedance
- Excellent Temperature Stability
- Available on Tape & Reel

### Description

MABA-008483-CT1760 is a welded surface mount technology 1:1 transmission line transformer designed for high volume CATV Broadband applications.

Suitable for use in 50  $\Omega$  and 75  $\Omega$  systems.

### Functional Schematic



### Pin Configuration<sup>3</sup>

Pin #	Function	Pin #	Function
1	Primary Dot	3	Secondary Dot
2	Secondary	4	Primary

### Electrical Specifications: Freq. = 50 - 1200 MHz, T<sub>A</sub> = +25°C, Z<sub>0</sub> = 75 $\Omega$

Parameter	Frequency Test Conditions (MHz)	Units	Min.	Typ.	Max.
Insertion Loss 1 (Through) pin 3 to pin 1	50	dB	—	0.13	0.33
	870			0.53	0.93
	1002			0.63	1.18
	1200			0.83	1.93
Insertion Loss 2 (Coupled) pin 2 to pin 1	50	dB	—	0.43	0.47
	870			0.33	0.63
	1002			0.43	0.78
	1200			0.63	1.33
Amplitude Balance	50	dB	—	0.3	-0.6
	870			-0.1	+0.7
	1002			-0.2	+0.7
	1200			-0.2	+0.8
Phase Balance	50 - 1002	°	—	1.2	± 4.0
	1002 - 1200			3.2	± 8.0
Input Return Loss	50 - 500	dB	18.0	23.0	—
	500 - 1002		17.5	19.0	
	1002 - 1200		11.0	18.0	

### Ordering Information

Part Number	Package
MABA-008483-CT1760	900 piece reel
MABA-008483-CT17TB	Customer Test Board

### Recommended Maximum Ratings<sup>1,2</sup>

Parameter	Absolute Maximum
Input Power	250 mW
DC Current	30 mA
Operating & Storage Temperature	-40°C to +85°C


1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.

## 1:1 Transmission Line Transformer 50 - 1200 MHz


Rev. V4

### Typical Performance Curves


**Insertion Loss 1 (thru); pin 3-1**

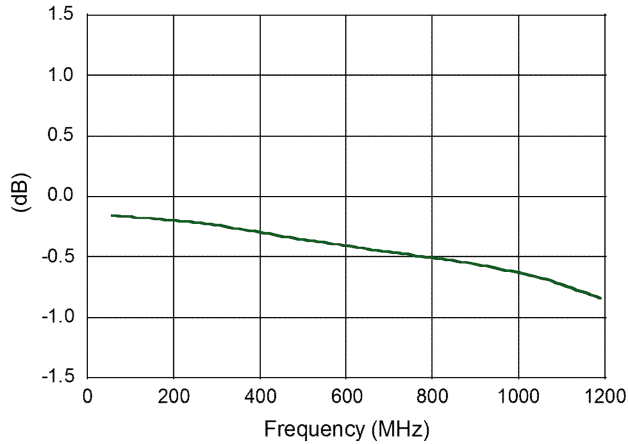


**Insertion Loss 2 (coup); pin 2-1**

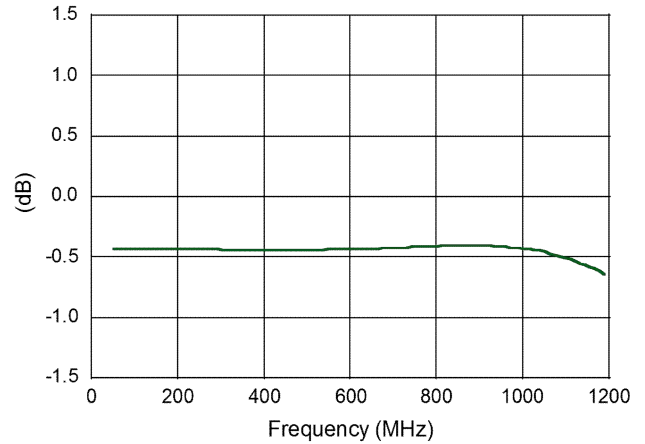


**Amplitude Balance**

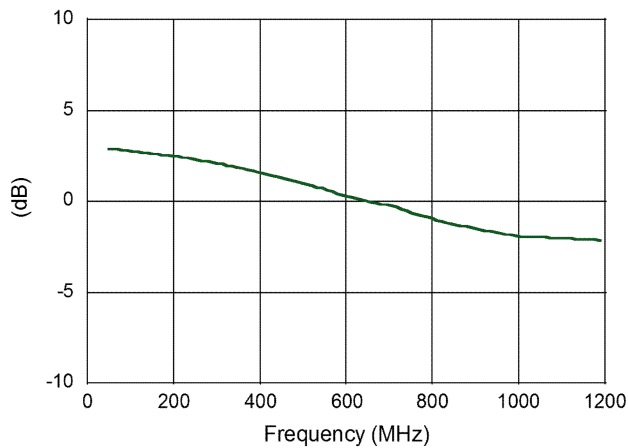

**Phase Balance**

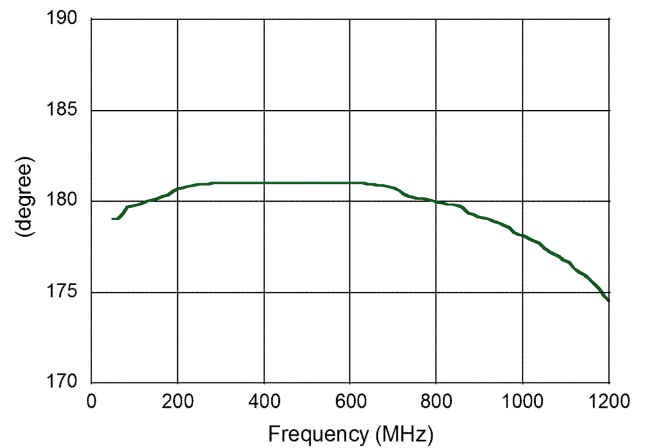


**Return Loss: Input**

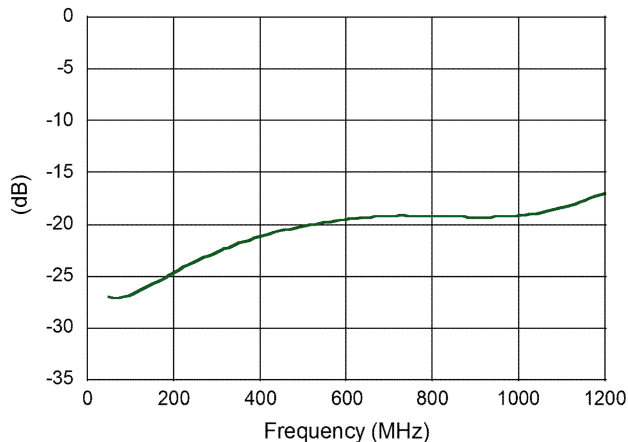

## 1:1 Transmission Line Transformer 50 - 1200 MHz


Rev. V4

### Outline Drawing<sup>3,4</sup>

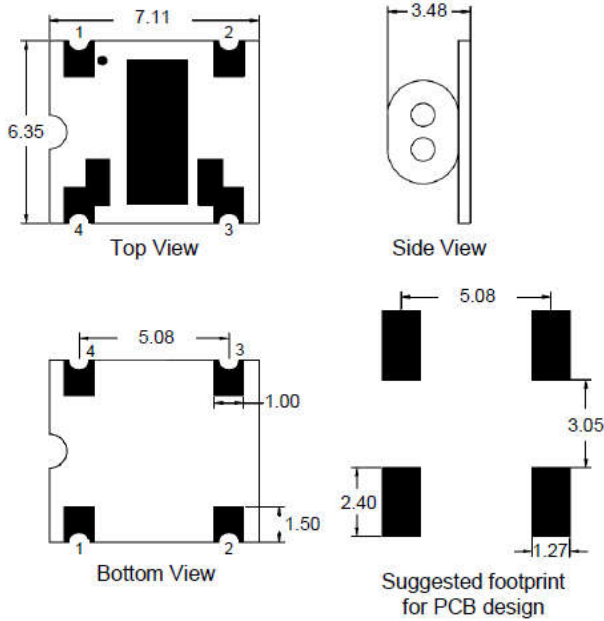

3. Dimensions in mm.
4. Tolerance:  $\pm 0.2$  mm unless otherwise noted.

### Carrier Tape Orientation

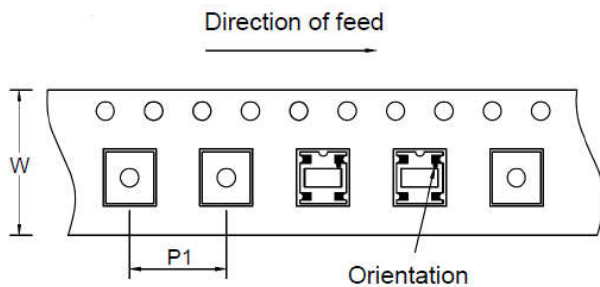

### Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel Size	mm	330
Tape Width	mm	16.0
Pitch	mm	12.0
Orientation	-	F60
Reference Application Note ANI-019 for orientation		

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.