


Features

- 4:1 Impedance ratio
- Surface mount
- Can be used in both 50Ω and 75Ω systems
- Available on tape and reel
- Lead-Free open package
- RoHS* Compliant and 260°C Reflow Compatible


Description

MABA-009232-CT4A4B is a 4:1 RF transmission line transformer in a low cost, surface mount package.

Ideally suited for broadband CATV applications.

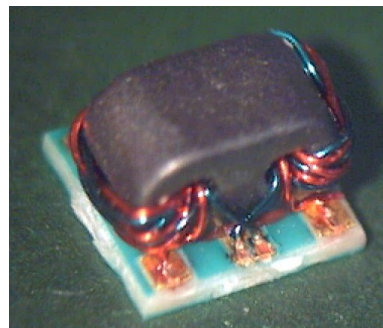

Functional Schematic

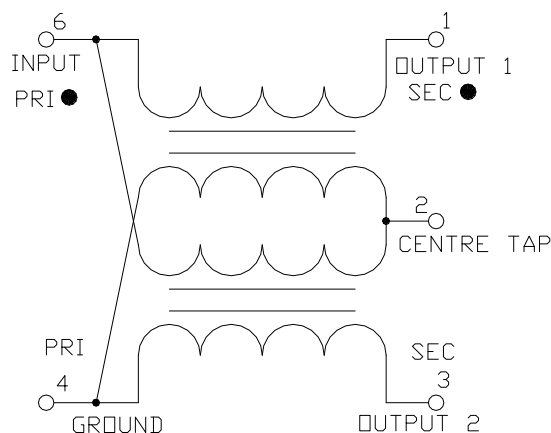

Ordering Information¹

Part Number	Package
MABA-009232-CT4A4B	2000 piece reel
MABA-009232-CT4ATB	Sample Board

1. Reference Application Note M513 for reel size information.
2. MACOM recommends connecting unused package pins to ground.

Pin Configuration²

Pin no.	Function
1	Secondary dot (Output 1)
2	Centre tap (Ground)
3	Secondary (Output 2)
4	Primary (Ground)
6	Primary dot (Input)

* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

Transformer, 4:1 Transmission Line Balun 5 to 1200 MHz

Rev. V3


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$

Parameter	Test Conditions	Units	Min	Typ	Max
Insertion Loss 1 (Pin 6 to 1)	5 - 450 MHz	dB	—	0.8	1.2
	450 - 1200 MHz			1.3	2.6
Insertion Loss 2 (Pin 6 to 3)	5 - 450 MHz	dB	—	0.8	1.2
	450 - 870 MHz			1.3	2.5
	870 - 1200 MHz			2.2	3.8
Amplitude Unbalance (Nominal 0dB)	5 - 750 MHz	dB	—	0.05	± 1.0
	750 - 1200 MHz			0.6	± 2.6
Phase Unbalance (Nominal 180°)	5 - 50 MHz	°	—	0.4	± 2
	50 - 870 MHz			3.8	± 15
	870 - 1200 MHz			5.4	± 18
Input Return Loss	5 - 50 MHz	dB	15	23	—
	50 - 650 MHz		10	17	
	650 - 1200 MHz		7	11	

Absolute maximum ratings

Parameter	Absolute maximum
Max input power	250 mW
DC current	200 mA
Operating Temperature	-40°C to +105°C
Storage Temperature	-40°C to +85°C


Case style: SM-187

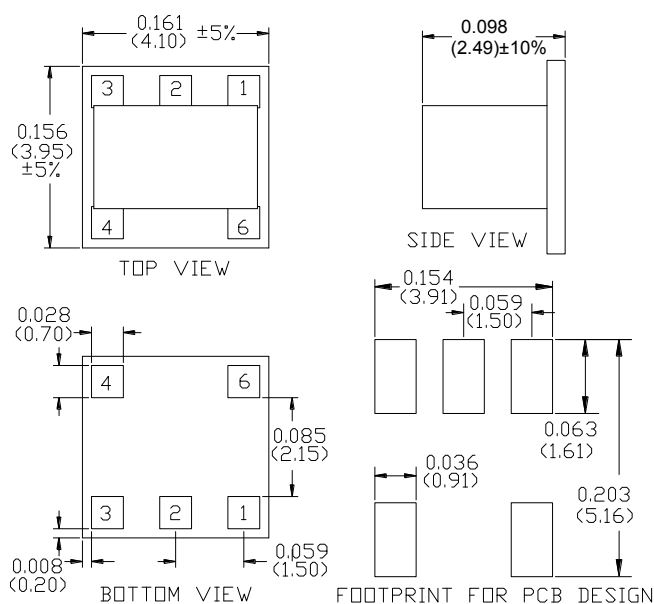


Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010, unless otherwise stated

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$


Insertion Loss 1: through pin 6 to pin 1

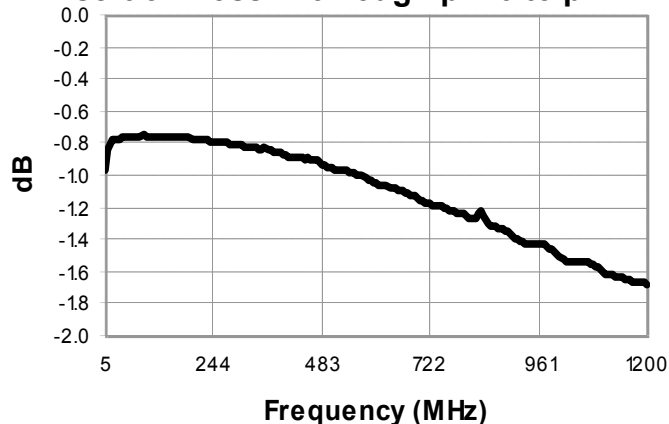


Insertion Loss 2: coupled pin 6 to pin 3

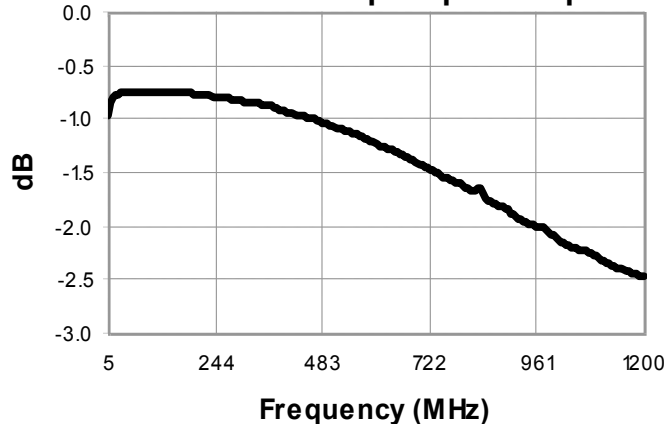


Amplitude Balance

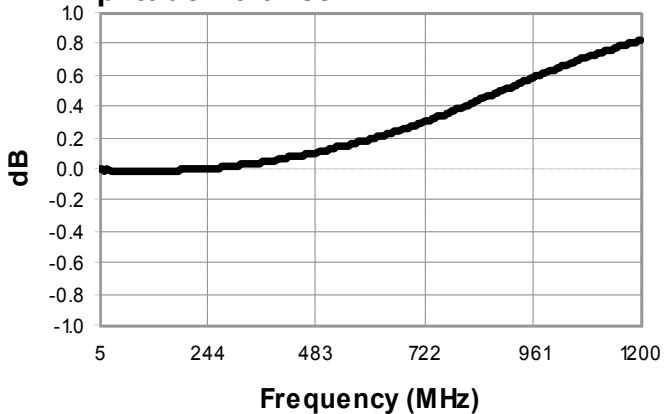

Phase Balance

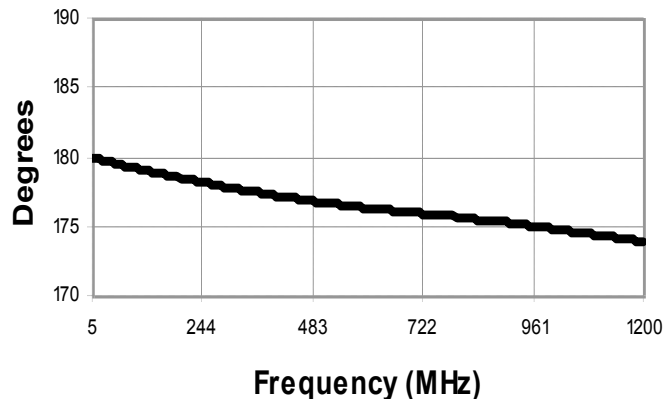

Return Loss: Input

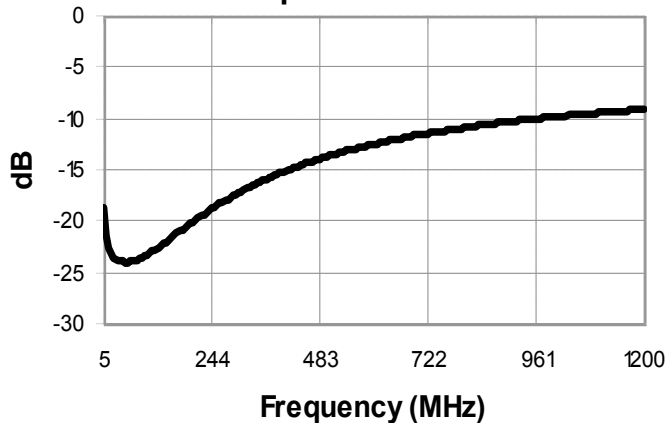

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.