


1:1 Transmission Line Transformer with center tap 5 - 1000 MHz

V2

Features

- 1:1 impedance
- Surface mount
- Centre tap on secondary
- 260° reflow compatible
- RoHS Compliant and Pb free
- Available on tape and reel

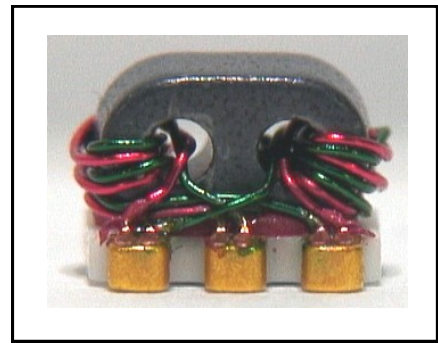

Description







MACOM's MABA-011016 is a 1:1 RF Transmission Line transformer in a low cost, surface mount package. Excellent return loss. Ideally suited for high volume wireless applications.

Electrical Specifications: $Z_0 = 50\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$

| Parameter | Conditions | Units | Min | Typ | Max |
|-----------------------------------|----------------|----------|-----|------|------|
| Frequency Range | | MHz | 5 | | 1000 |
| Impedance | | Ω | | 50 | |
| Impedance Ratio | | | | 1:1 | |
| Insertion Loss 1 (Pin5 - Pin1) | 5 - 870 MHz | dB | - | 0.8 | 1.6 |
| | 870 - 1000 MHz | dB | - | 1.2 | 1.8 |
| Insertion Loss 2 (Pin5 - Pin3) | 5 - 630 MHz | dB | - | 0.7 | 1.2 |
| | 630 - 1000 MHz | dB | - | 1.0 | 1.5 |
| Amplitude Balance | 5 - 500 MHz | dB | - | 0.02 | 0.5 |
| | 500 - 1000 MHz | dB | - | 0.01 | 0.7 |
| Phase Balance | 5 - 500 MHz | $^\circ$ | - | 1.5 | 6.0 |
| | 500 - 1000 MHz | $^\circ$ | - | 2.2 | 8.0 |
| Input Return Loss (Pin5) | 5 - 300 MHz | dB | 16 | 24 | - |
| | 300 - 750 MHz | dB | 10 | 16 | - |
| | 750 - 1000 MHz | dB | 8 | 13 | - |


1:1 Transmission Line Transformer with center tap 5 - 1000 MHz

V2

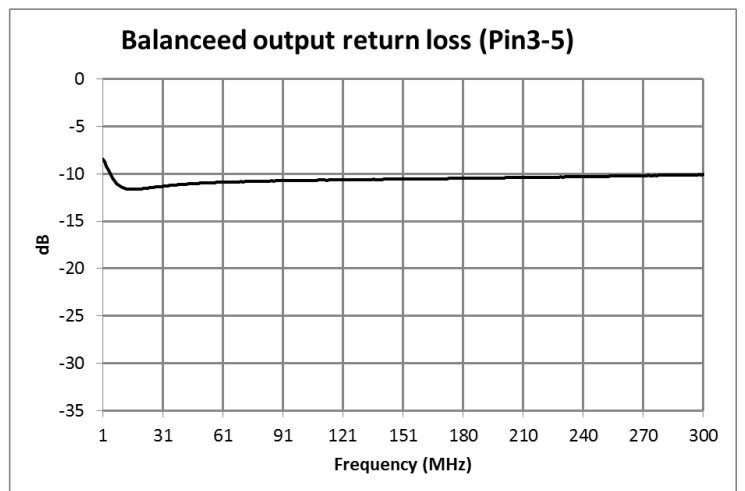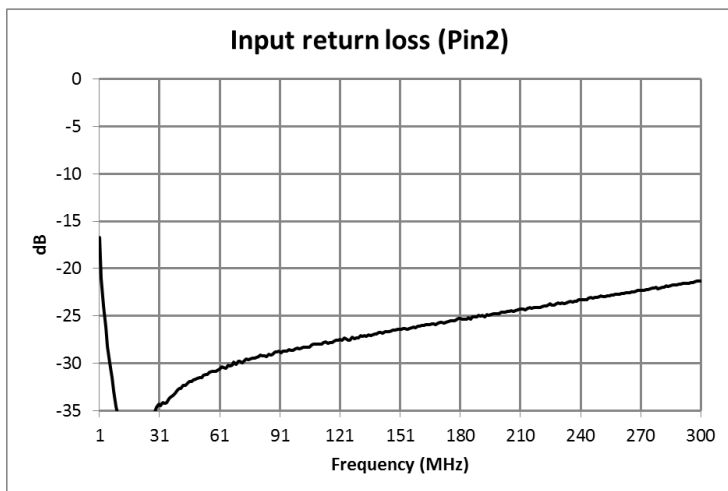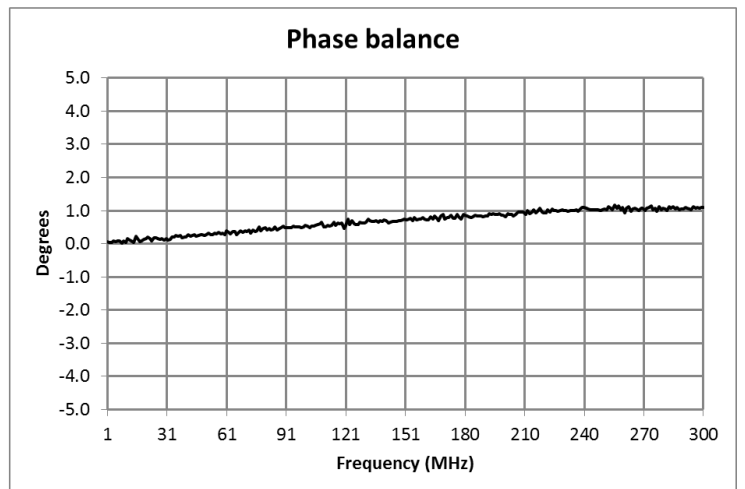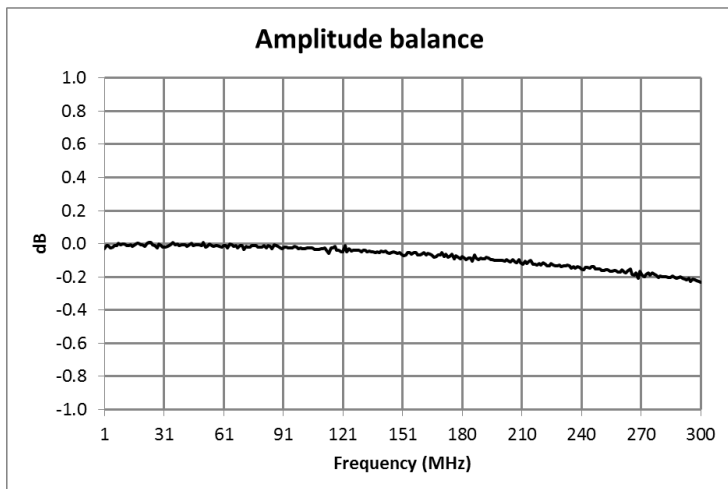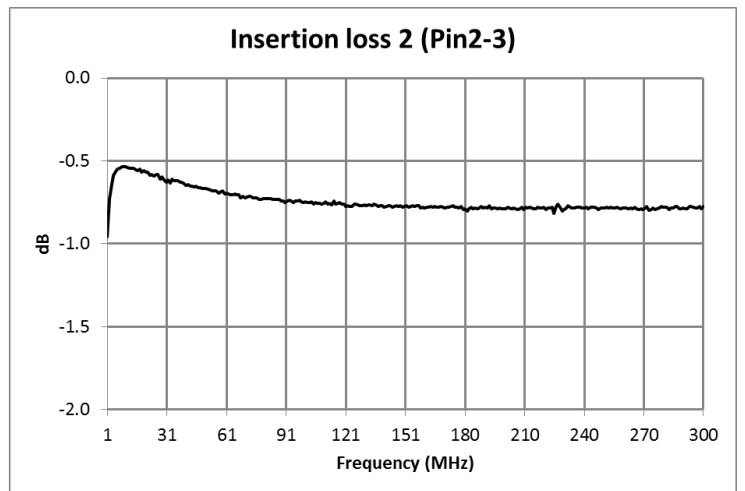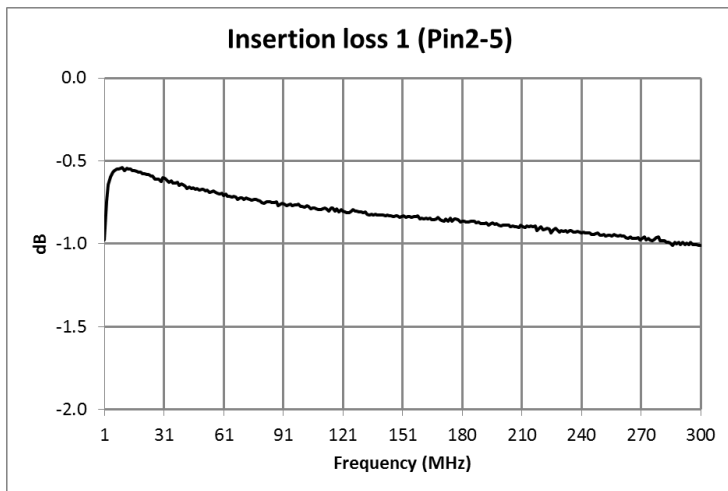


Electrical Specifications: $Z_0 = 50\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$

Outline Drawing

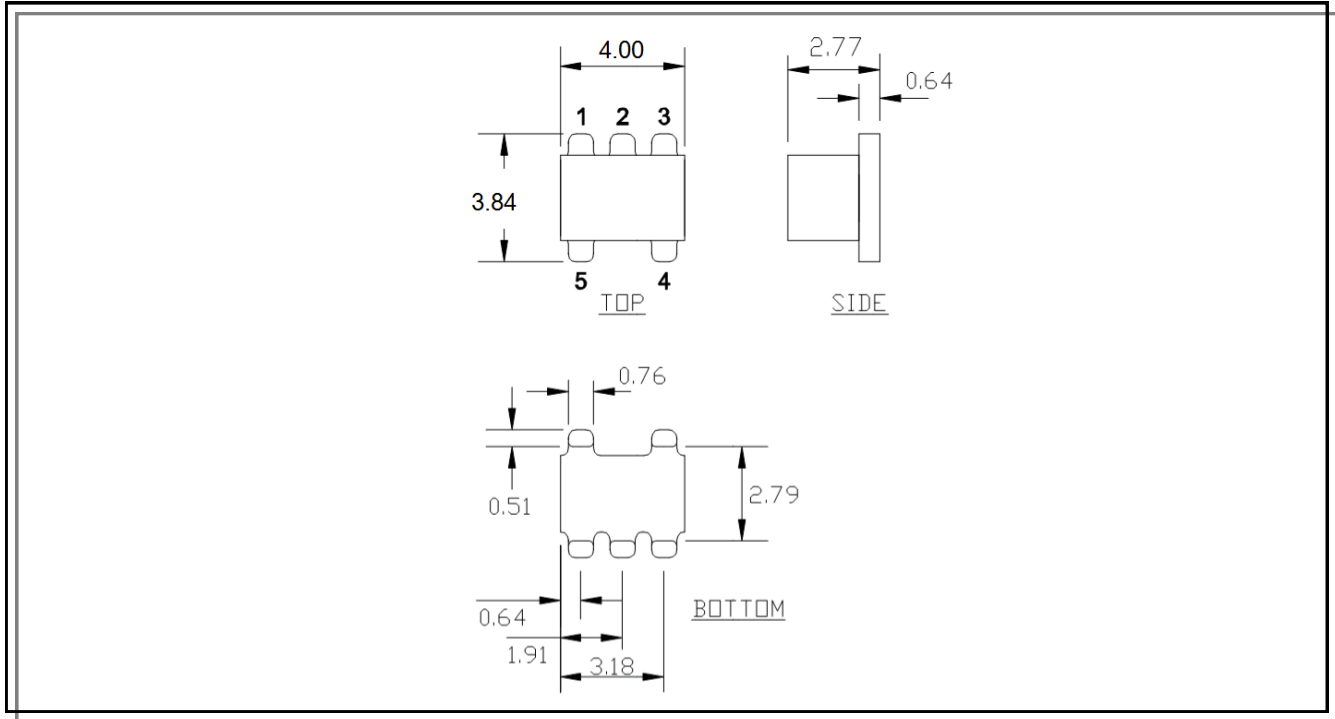


1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Finish: Electroless nickel immersion gold (ENIG)

Schematic

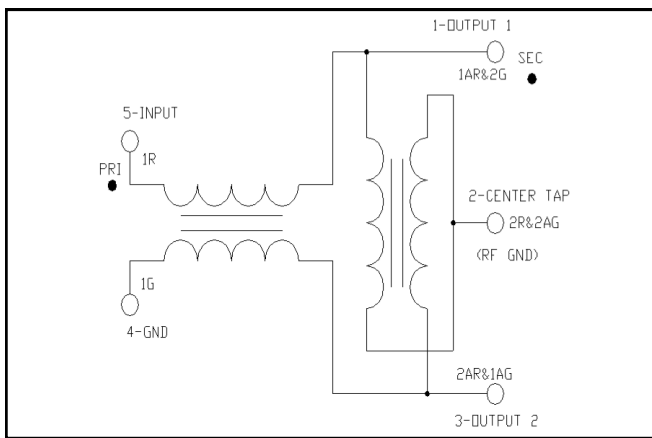

Recommended Footprint

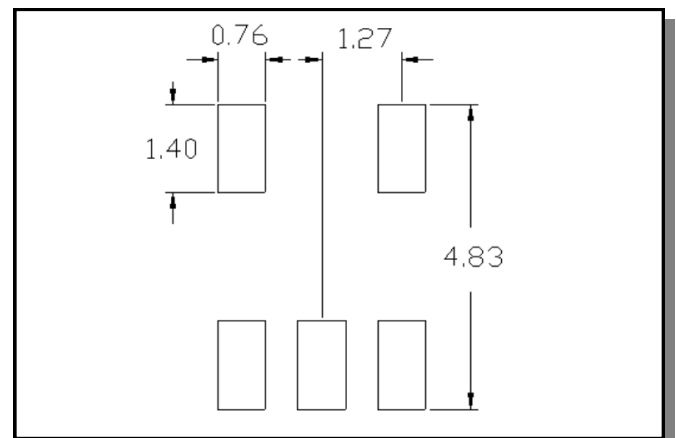

1:1 Transmission Line Transformer with center tap 5 - 1000 MHz

V2

Tape & Reel Information

| Parameter | Units | Value |
|--|-------|-------|
| Qty per reel | - | 2000 |
| Reel Size | mm | 330 |
| Tape Width | mm | 12.00 |
| Pitch | mm | 8.00 |
| Ao | mm | 4.20 |
| Bo | mm | 4.50 |
| Ko | mm | 3.20 |
| Orientation | - | F5 |
| Reference Application Note ANI-019 for orientation | | |

Ordering Information

| Part Number | Description |
|----------------|---------------------|
| MABA-011016 | Tape & Reel |
| MABA-011016-TB | Customer test board |

Recommended Maximum Ratings


| Parameter | Units | Min | Max |
|-----------------------------|-------|-----|-----|
| Input Power | mW | | 250 |
| DC Current | mA | | 240 |
| Operating Temperature Range | °C | -40 | +85 |

Full temperature plots available on request

Pin Configuration

| Pin No. | Function |
|---------|-------------------------------|
| 1 | Secondary Dot (output 1) |
| 2 | Secondary Centre Tap (ground) |
| 3 | Secondary (output 2) |
| 4 | Primary (ground) |
| 5 | Primary Dot (input) |

Application circuit

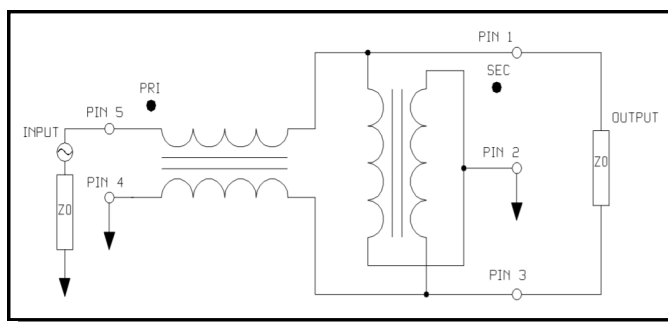

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.