

**17 dB Coupler, 75  $\Omega$   
4 - 862 MHz**


Rev. V4

## Features


- 17 dB Coupler
- Surface Mount Package
- Excellent Temperature Stability
- RoHS Compliant & Lead-Free
- Available on Tape & Reel

## Description

The MACP-010383-CH0A40 is a high performance 75  $\Omega$  coupler in a surface mount package. Ideally suited for high volume CATV applications.



## Functional Schematic

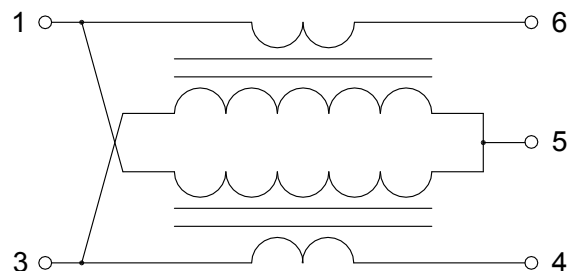

## Pin Configuration

Pin #	Function	Pin #	Function
1	Input	4	External 75 $\Omega$
2	No Connection	5	Ground
3	Coupled	6	Output

## Electrical Specifications: Freq. = 4 - 862 MHz, $T_A = 25^\circ\text{C}$ , $Z_0 = 75 \Omega$ , $P_{IN} = 0 \text{ dBm}$

Parameter	Freq. Test Conditions (MHz)	Units	Min.	Typ.	Max.
Coupling	4 - 862	dB	—	17	$\pm 1$
Main Line Loss	4 - 862	dB	—	0.6	1.0
Isolation	4 - 862	dB	24	35	—
Input Return Loss	4 - 862	dB	18	27	—
Output Return Loss	4 - 862	dB	18	29	—
Coupling Return Loss	4 - 862	dB	18	31	—

## Ordering Information

Part Number	Package
MACP-010383-CH0A40	2000 piece reel
MACP-010383-C003TB	customer test board

## Recommended Maximum Ratings


Parameter	Units
Input Power	250 mW
DC Current	200 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

17 dB Coupler, 75  $\Omega$   
4 - 862 MHz


Rev. V4

## Typical Performance Curves


**Coupling**

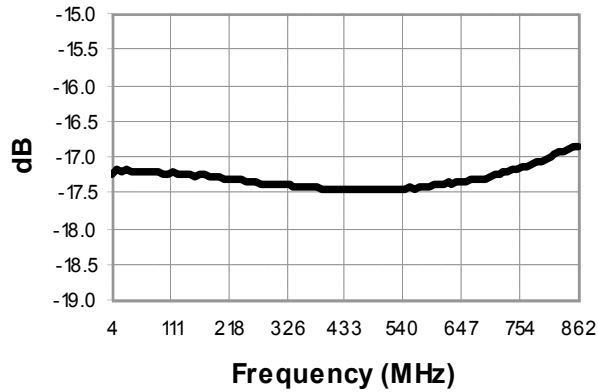


**Main Line Loss**

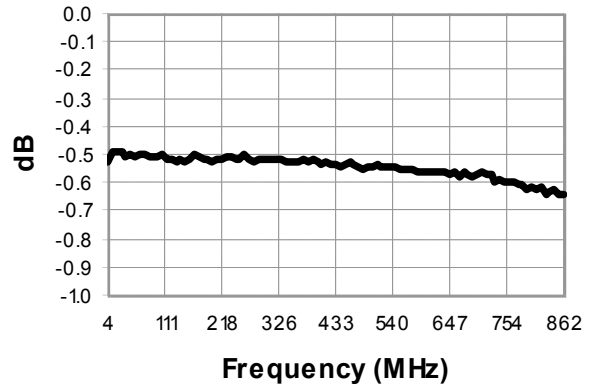


**Input Return Loss**

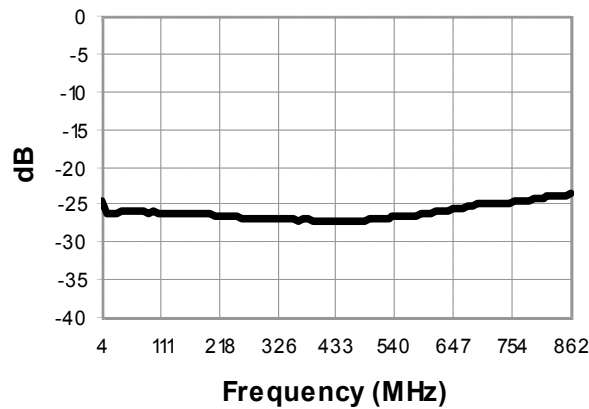


**Output Return Loss**

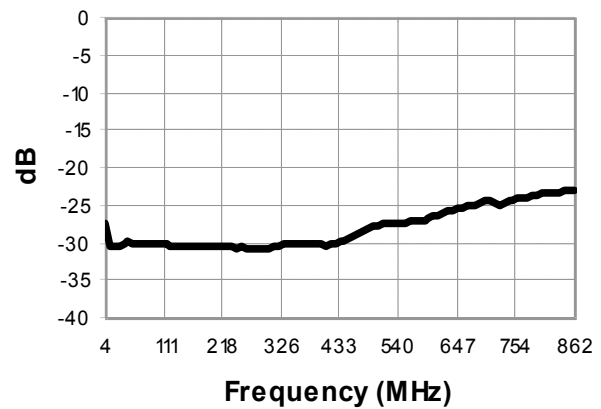

**Coupled Port Return Loss**

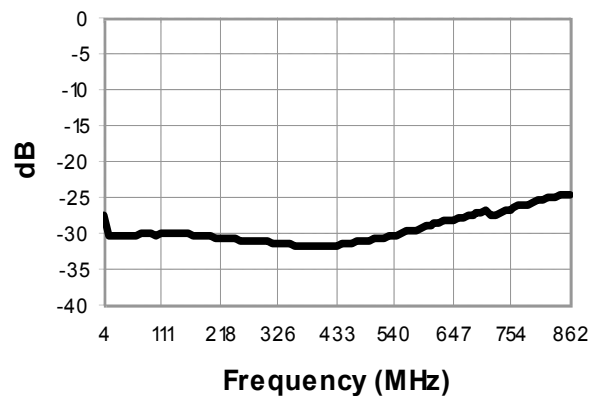


**Isolation**

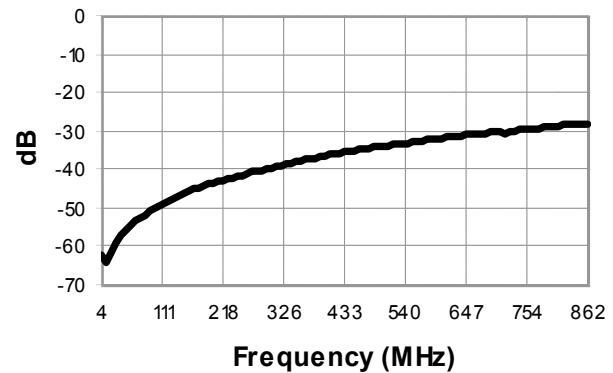


17 dB Coupler, 75  $\Omega$   
4 - 862 MHz

Rev. V4


## Application Schematic

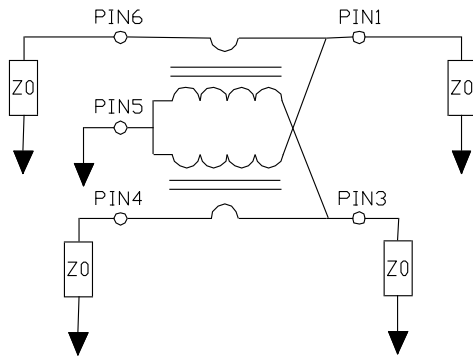

## Recommended Board Layout

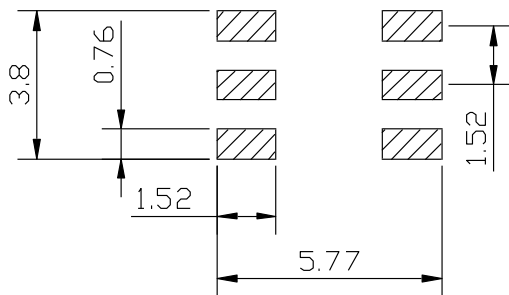

## Outline Drawing<sup>1,2,3,4</sup>

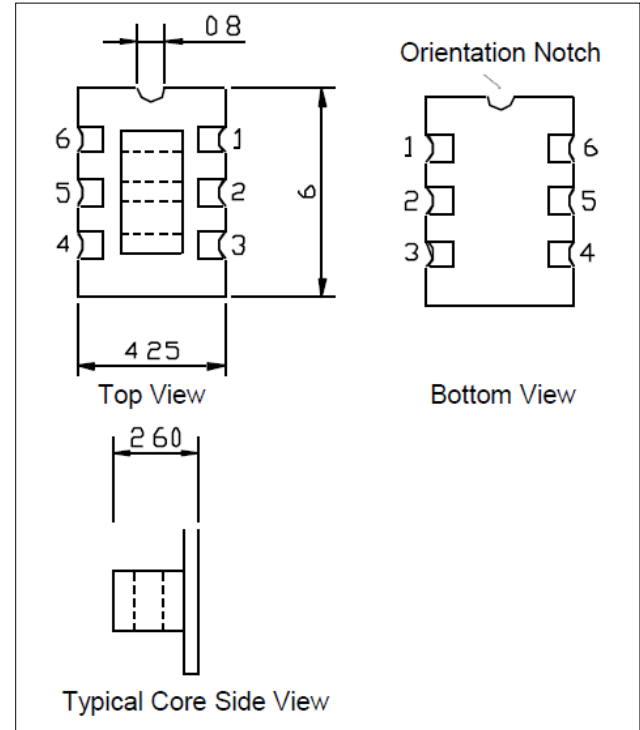

1. Dimensions in mm.
2. Tolerance:  $\pm 0.2$  mm unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Finish: Electroless nickel immersion gold

## Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel Size	mm	330
Tape Width	mm	16.0
Pitch	mm	8.0
Ao	mm	4.5
Bo	mm	6.4
Ko	mm	3.2
Orientation	-	F45
Reference Application Note ANI-019 for orientation		

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.