

MACP-010414-CA0370




Coupler, 10dB
5 MHz - 1200 MHz

Rev. V1

Features

- ◆ 10dB coupling ratio
- ◆ Surface mount
- ◆ Available on tape and reel
- ◆ 260°C reflow compatible
- ◆ RoHS Compliant and Pb free
- ◆ Excellent temperature stability
- ◆ Can be used on 50Ω and 75Ω systems
- ◆ Suitable for all CATV, Broadband and FTTx applications.

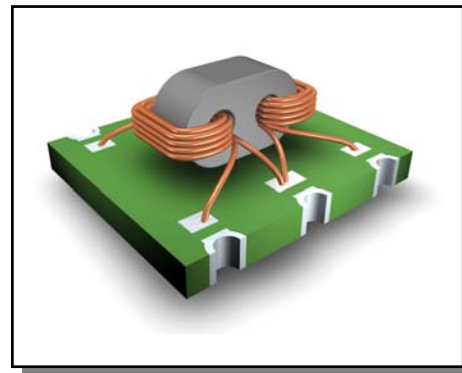


Electrical Specifications: $Z_0 = 75\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$

Parameter	Conditions	Units	Min	Typ	Max
Frequency Range		MHz	5		1200
Impedance		Ω		75	
Coupling Ratio		dB		10	
Coupling (Pin 3 to 1)	5 - 1200 MHz	dB	-	10.0	± 0.5
Main Line Loss (Pin 3 to 4)	5 - 500 MHz	dB	-	1.1	1.2
	500 - 1200 MHz	dB	-	1.3	1.6
Isolation (Pin 3 to 6)	5 - 1000 MHz	dB	20	22	-
	1000 - 1200 MHz	dB	18	21	-
Return Loss: Input (Pin 3)	5 - 1200 MHz	dB	17	27	-
Return Loss: Coupling (Pin 1)	5 - 1200 MHz	dB	17	26	-
Return Loss: Output (Pin 4)	5 - 1000 MHz	dB	20	23	-
	1000 - 1200MHz	dB	17	20	-

Pin Configuration

Pin No.	Function
1	Coupled
2	Ground
3	Input
4	Output
5	Not Connected (ground)
6	Isolated

Schematic

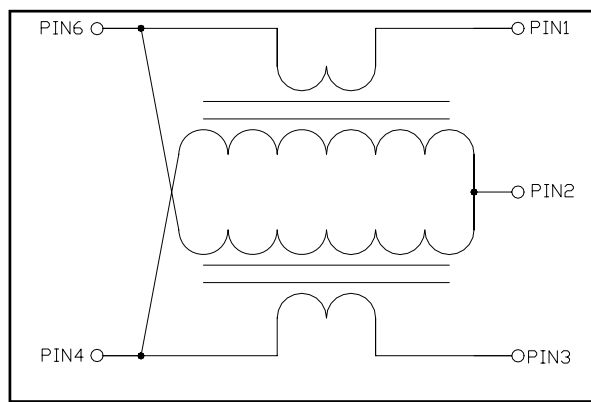


1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


Coupling: Pin 3 to 1

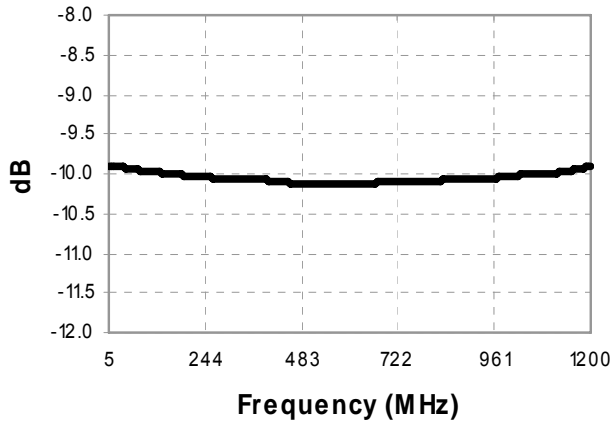


Main Line Loss: Pin 3 to 4

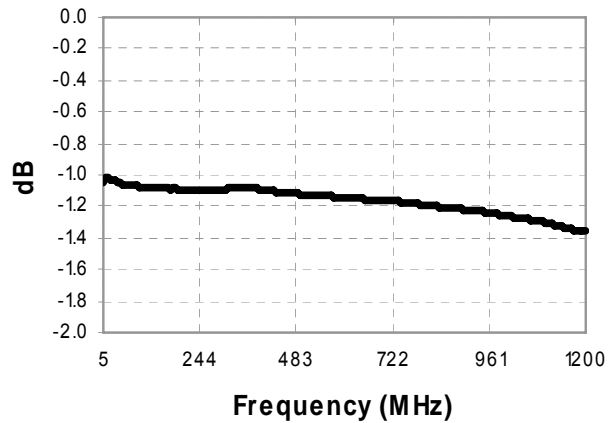


Isolation: Pin 3 to 6

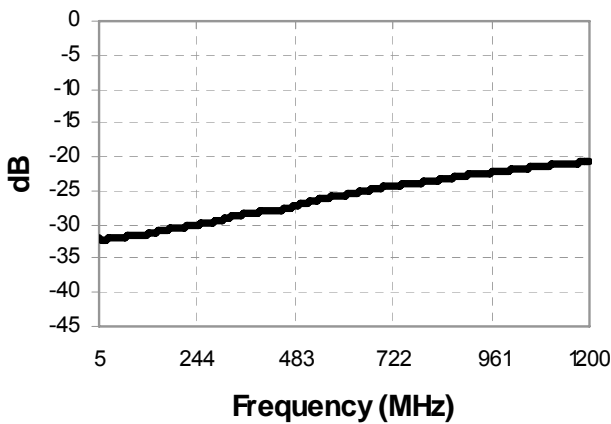


Return Loss: Input Pin 3

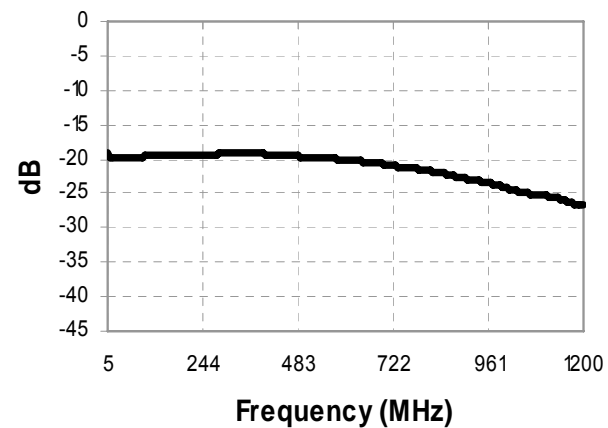

Return Loss: Output Pin 4

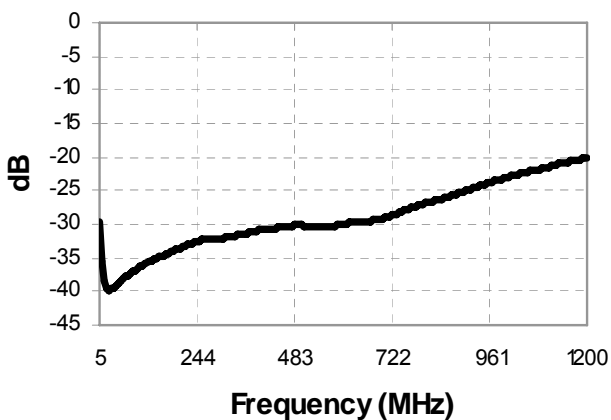


Return Loss: Coupled Pin 1

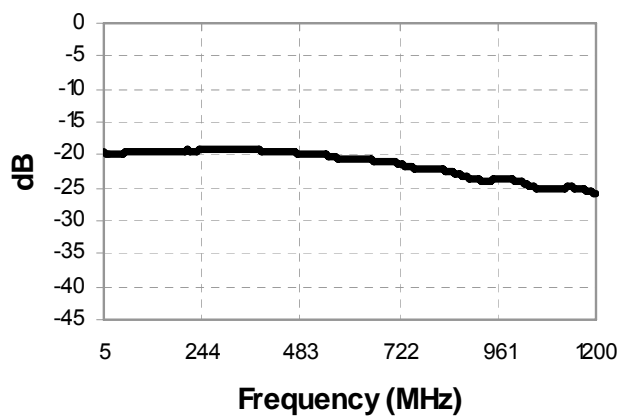


Electrical Specifications: $Z_0 = 75\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$

Outline Drawing

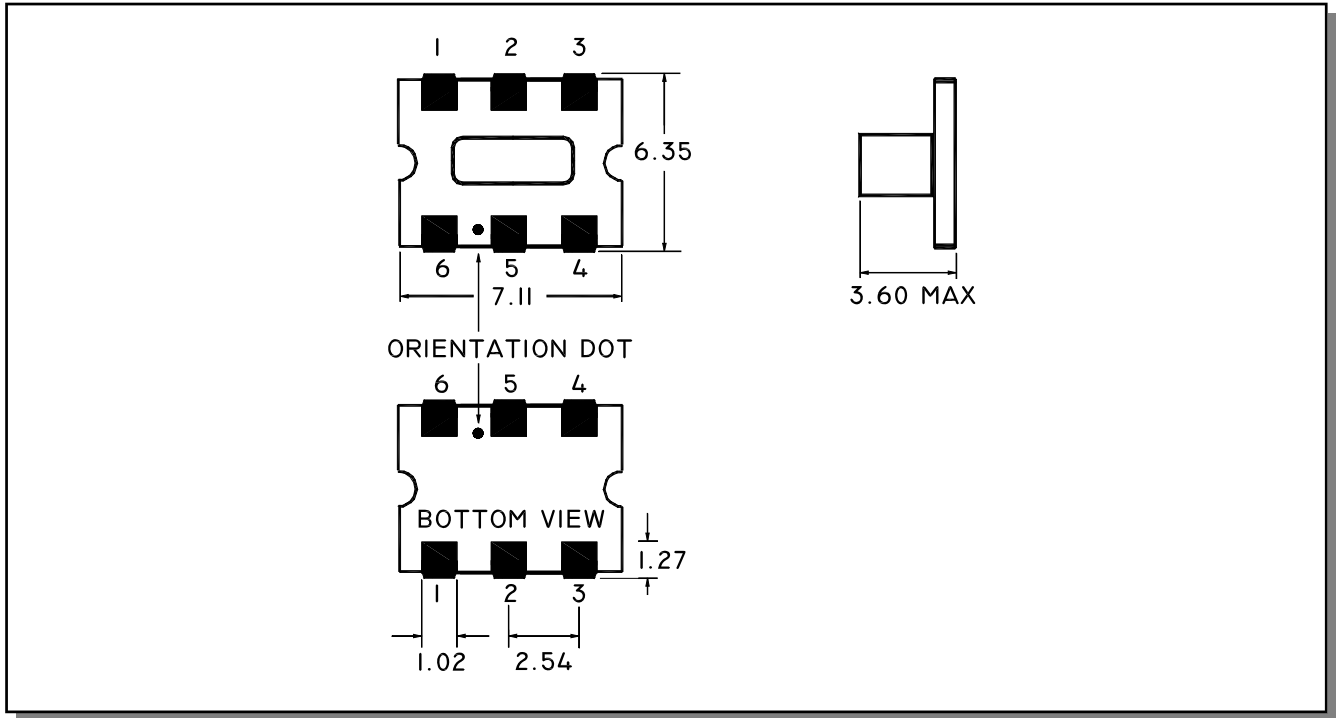


1. Dimensions in mm.
2. Tolerance: $\pm 0.2\text{mm}$ unless otherwise noted.
3. Model number and lot code printed on reel.
4. Plating Finish: ENIG gold on Nickel

Application Circuit

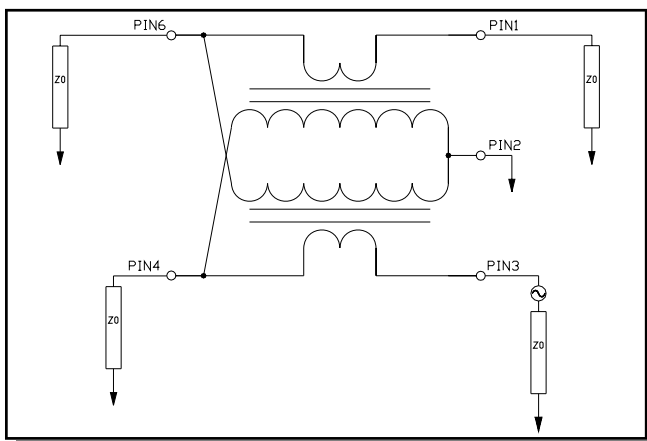

Recommended Footprint

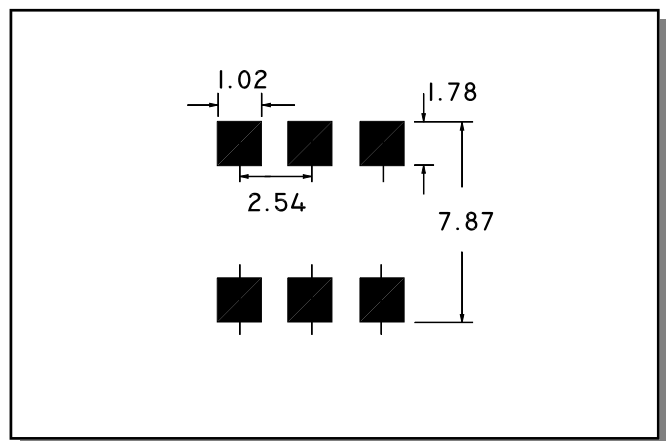

MACP-010414-CA0370



Coupler, 10dB
5 MHz - 1200 MHz

Rev. V1

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel size	mm	330
Tape width (W)	mm	16.0
Pitch (P ₁)	mm	12.0
A ₀	mm	6.7
B ₀	mm	7.4
K ₀	mm	3.1
Orientation	-	F15
Reference Application Note ANI-019 for orientation		

Ordering Information

Part Number	Description
MACP-010414-CA0370	Tape & Reel
MACP-010414-CA03TB	Customer Evaluation Board

Recommended Maximum Ratings

Parameter	Units	Min	Max
Input Power	mW		250
DC Current	mA		200
Operating Temperature Range	°C	-40	+85
Storage Temperature Range	°C	-55	+125

Temperature data available on request

ECO History

Rev	Date	Description	ECO
V1	18 Aug 2010	Released	20101117