

MACP-010446-C80370




Coupler, 8dB
5 MHz - 1200 MHz

Rev. V2

Features

- ◆ 8dB coupling Typical
- ◆ Surface mount
- ◆ Available on tape and reel
- ◆ Low Profile
- ◆ RoHS Compliant and Pb free
- ◆ Excellent temperature stability
- ◆ All wires welded to substrate

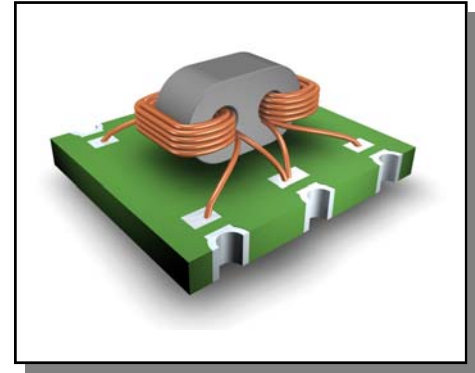


Electrical Specifications: $Z_0 = 75\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$

Parameter	Conditions	Units	Min	Typ	Max
Frequency Range		MHz	5		1200
Impedance		Ω		75	
Coupling Ratio		dB		8	
Main Line Loss (Pin6 - Pin1)	5 – 870MHz	dB	2.0	1.5	-
	870 – 1002 MHz	dB	2.3	1.85	-
	1002 - 1200 MHz	dB	2.6	2.1	-
Coupling (Pin6 - Pin4)	5 – 1002MHz	dB	8.5	8.0	7.5
	1002 – 1200 MHz	dB	8.7	8.0	7.3
Coupling Flatness	5 - 1200 MHz	dB	-	0.5	0.8
Directivity	5 - 870 MHz	dB	-	17.5	11.0
	870 - 1200 MHz	dB	-	12.8	9.0
Return Loss: Input (Pin6)	5 - 50 MHz	dB	17	18	-
	50 - 1200 MHz	dB	16.5	18.7	-
Return Loss: Output (Pin1)	5 - 50 MHz	dB	23	31.3	-
	50 - 870 MHz	dB	20	33.5	-
	870 - 1200 MHz	dB	20	32.0	-
Return Loss: Coupling (Pin4)	5 - 1200 MHz	dB	16	18.5	-

Pin Configuration

Pin No.	Function
1	Output
2	Not Connected
3	Isolated
4	Coupled
5	Ground
6	Input

Schematic

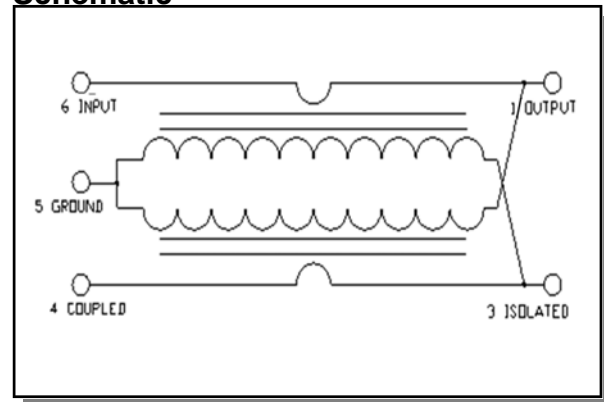


1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


Mainline Loss

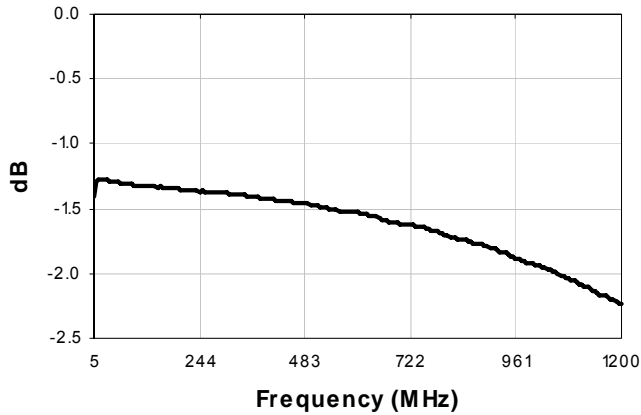


Input Return Loss

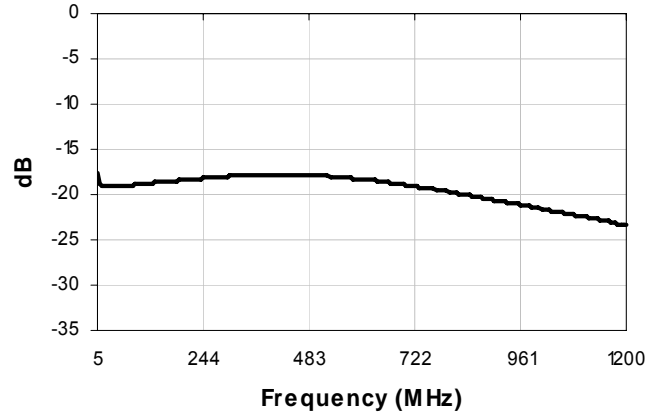


Coupling

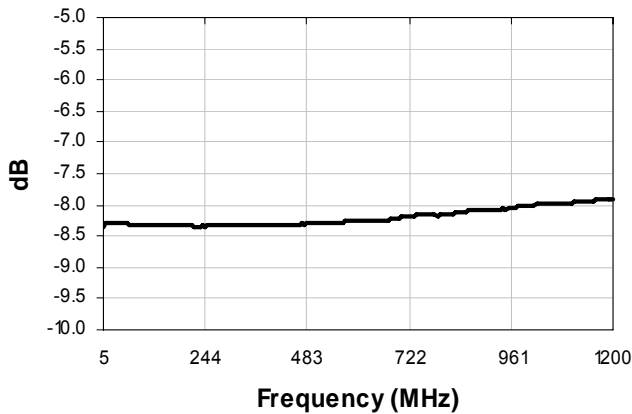


Output Return Loss

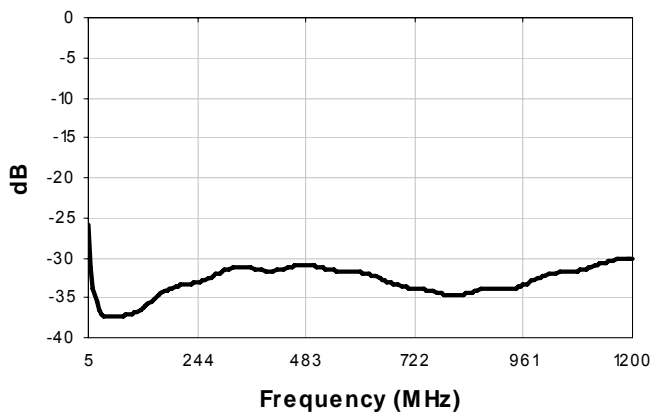

Directivity

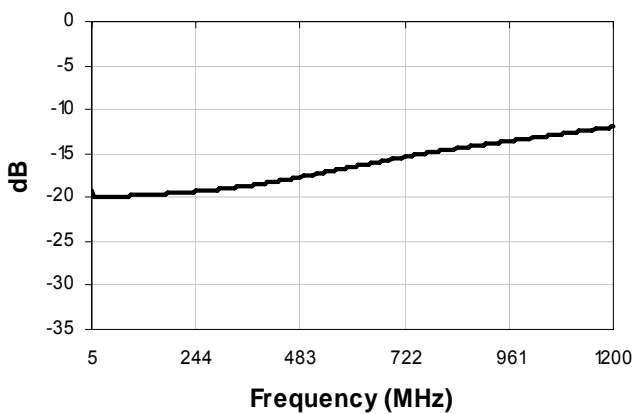


Coupled Return Loss

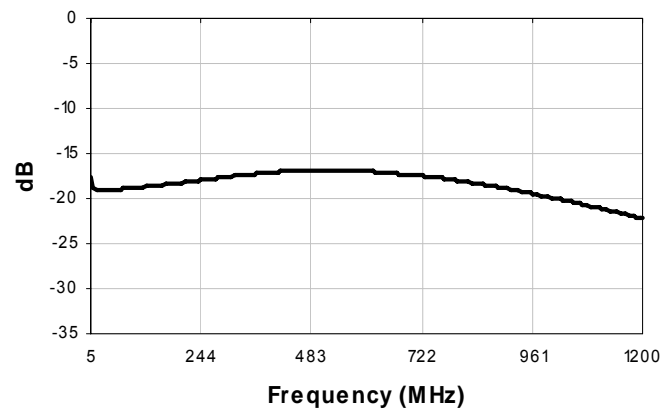


Electrical Specifications: $Z_0 = 75\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$

Outline Drawing

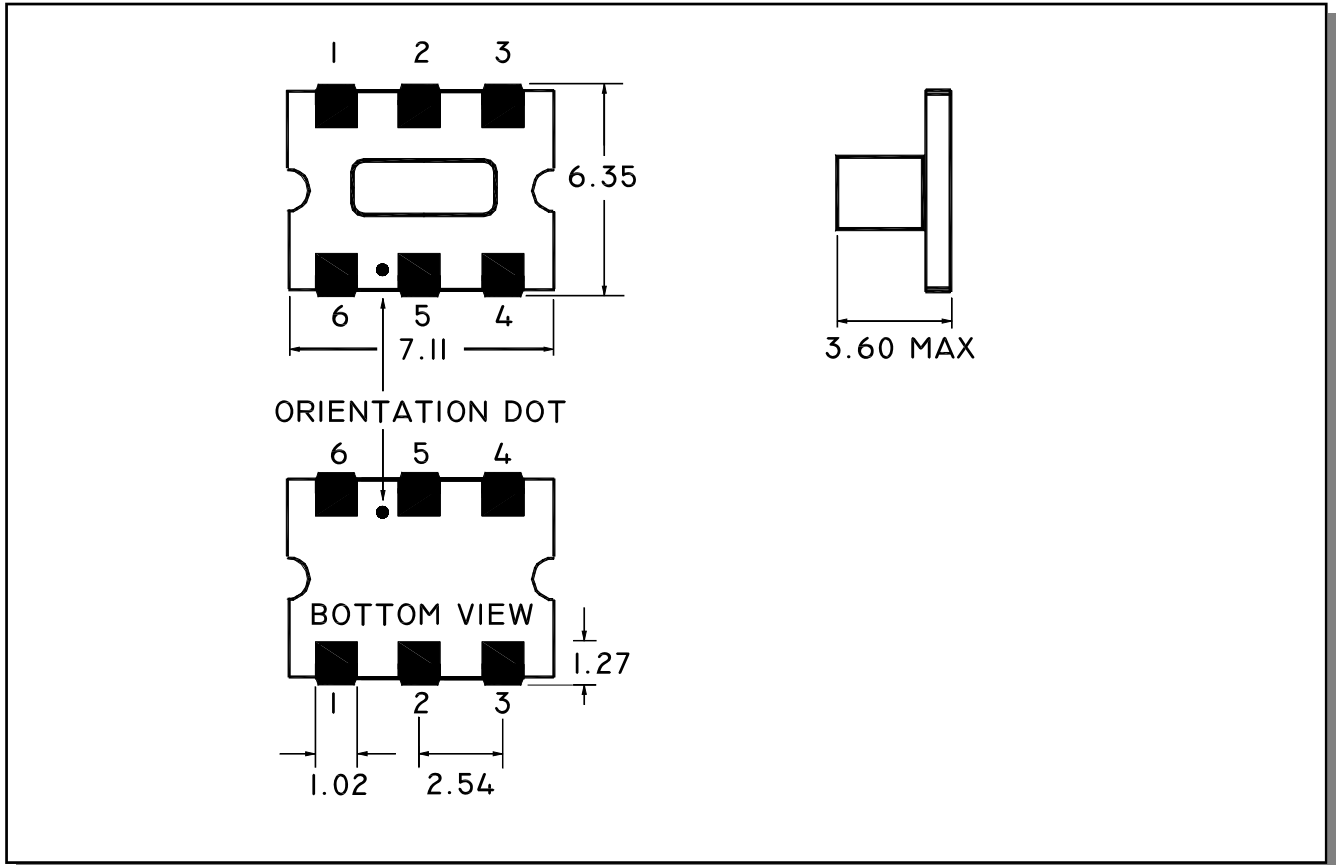

1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code printed on reel.
4. Plating finish: ENIG on both sides, 0.05 to 0.1 μ m gold over 3 to 6 μ m nickel

Recommended Footprint

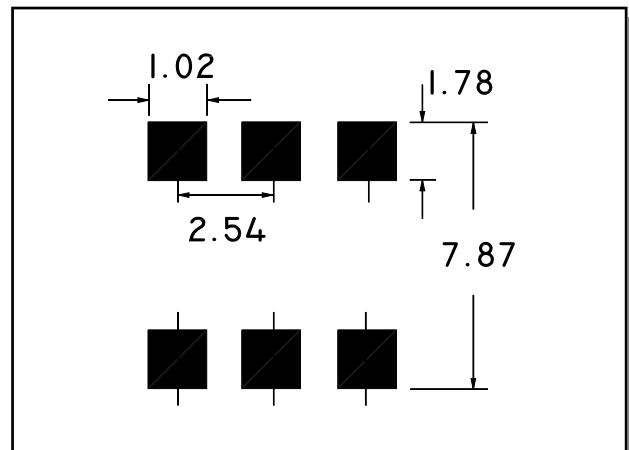

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel size	mm	330
Tape width (W)	mm	16.0
Pitch (P ₁)	mm	12.0
A ₀	mm	6.7
B ₀	mm	7.4
K ₀	mm	3.1
Orientation	-	F15

Reference Application note ANI-019 for orientation

Ordering Information

Part Number	Description
MACP-010446-C80370	Tape & Reel
MACP-010446-C803TB	Customer Evaluation Board

Recommended Maximum Ratings

Parameter	Units	Min	Max
Input Power	mW		250
DC Current	mA		30
Operating Temperature Range	°C	-20	+85
Storage Temperature Range	°C	-20	+85

Temperature data available on request

ECO History

Rev	Date	Description	ECO
V1	4 Aug 2010	Released	20100998
V2	21 Sep 2010	Correct typ spec for i/p ret loss: was 1.8 is 18, on page 1/4	20101363