

**Multi Purpose Axial Leaded Glass Schottky Diodes**

V2


**Features**

- ◆ Glass Hermetically Sealed Packages
- ◆ Picosecond Switching
- ◆ Low Leakage Current
- ◆ Offered in Tape and Reel Packaging
- ◆ RoHS Compliant

**Description and Applications**

These Schottky diodes are designed to have picosecond switching speed and are housed in a hermetic axial lead glass package. These devices are designed for use in a variety of applications including mixing, detecting, and switching at both low and high power levels. They can also be used in commercial switching and control functions particularly in narrow band receivers. They can also be used in low frequency applications such as shaping, sampling, and as gates.

**Glass Package Style**

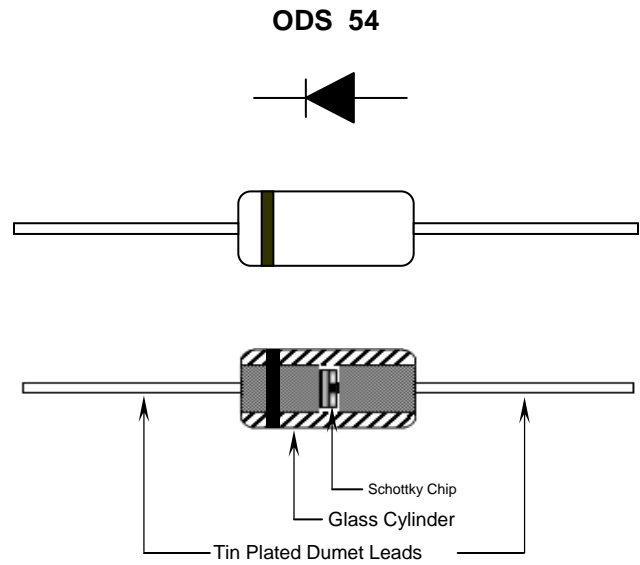

**Absolute Maximum Ratings**

**T<sub>AMB</sub> = +25°C (Unless Otherwise Noted) <sup>1</sup>**

Parameter	Absolute Maximum
D.C. Reverse Voltage	(See Table)
Operating Temperature	-65°C to +200°C
Storage Temperature	-65°C to +200°C
Installation Temperature	+230°C for 5 Seconds
<b>Power Dissipation Listed Below Will De-Rate Linearly to 0mW at 135°C</b>	
Case Style 54	250mW

**Ordering Information**

Part Number	Package	Standard Quantity
MA4E2811	ESD Bags	Bulk
MADS-002811-00540T	Tape and Reel	1500
MA4E2812-54	ESD Bags	Bulk

**Notes**

1. Operation of this device above any one of these parameters may cause permanent damage.

1

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


**Multi Purpose Axial Leaded Glass Schottky Diodes**

V2

**Diode Specifications \***

Part Number	Package Style	Voltage Breakdown @ 10uA Vb (min.)	Forward Voltage @ 1mA Vf (max.)	Forward Voltage @ 20mA Vf (max.)	Forward Voltage @ 35mA Vf (max.)	Reverse Leakage Current @ 8 V Ir (max.)	Reverse Leakage Current @ 15 V Ir (max.)	Capacitance @ 0V, F=1MHz Ct (max.)
MADS-002811-00540T MA4E2811	54	15 V	410 mV	1.0 V	-	100 nA	-	1.2 pF
MA4E2812-54	54	20 V	550 mV	-	1.0 V	-	150nA	1.2 pF

**Package Outline Dimensions**

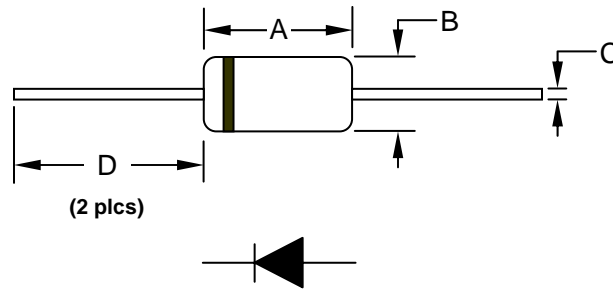

Package Style	Dimension A		Dimension B		Dimension C		Dimension D (Min.)	
	Mils	mm	Mils	mm	Mils	mm	Mils	mm
54	155 ± 10	3.94 ± .25	71 ± 3	1.8 ± .08	15 ± 1	.38 ± .03	1000	25.4

**Assembly Recommendations**

- Leads on axial leaded devices must be formed while being held firm. Bending the leads too close to the body of the part may cause internal damage to the device. Bends <0.060" from body are not recommended. Appropriate fixturing should be used.
- Devices may be soldered using standard 60/40, Sn/Pb or RoHS compliant solders. Axial leads are tin plated, 50µM, thick to ensure an optimum connection.

\* Specifications subject to change without notice.

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.