

Schottky Zero Bias Detector Diode Chip

Rev. V2


Features

- P-Type Schottky Diode
- Can be used Without External DC Bias
- Large Bondable Contact
- RoHS Compliant
- Available in Chip Form (ODS-1419)
- Can be Mounted with Solder or Conductive Epoxy

Description

The MADS-011010-1419 Zero Bias Detector diode (ZBD) is suitable for use in microstrip or stripline detector circuits. These chips can be used in automatic assembly processes due to their 2.6 x 5.7 mil rectangular gold contact and sturdy construction.

Chip Layout (ODS-1419)

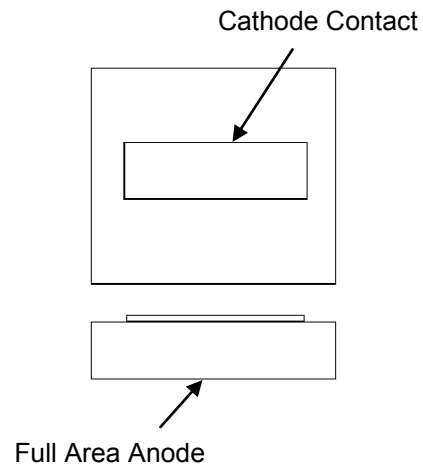

Electrical Specifications @ $T_A = +25^\circ\text{C}$

| Parameter | Test Conditions | Units | Min. | Typ. | Max. |
|--------------------|--|----------|------|------|------|
| Breakdown Voltage | $I_R = 100 \text{ mA}$ | V | 1.5 | — | — |
| Forward Voltage | $I_F = 0.1 \text{ mA}$ | mV | 60 | — | 120 |
| Forward Voltage | $I_F = 1 \text{ mA}$ | mV | 150 | — | 220 |
| Total Capacitance | $V_R = 0.5 \text{ V}, f = 1 \text{ MHz}$ | pF | — | 0.15 | — |
| Dynamic Resistance | $I_F = 9.5 - 10.5 \text{ mA}$ | Ω | — | — | 40 |

Absolute Maximum Ratings^{1,2}

| Parameter | Absolute Maximum |
|-----------------------|-----------------------|
| Reverse Voltage | 1.5 V |
| Operating Temperature | -55°C to +125°C |
| Storage Temperature | -55°C to +150°C |
| Mounting Temperature | +320°C for 10 seconds |
| ESD Classification | HBM Class 0 |

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.

Ordering Information

| Part Number | Package |
|--------------------|----------|
| MADS-011010-14190G | Gel Pack |

Die Handling and Mounting Information

Handling:

All semiconductor chips should be handled with care in order to avoid damage or contamination from perspiration, salts, and skin oils. For individual die, the use of plastic tipped tweezers or vacuum pick up tools is strongly recommended. Bulk handling should ensure that abrasion and mechanical shock are minimized.

Die Attach:

The die have Ti-Pt-Au back metal and gold plated contact metal. Die can be mounted with a gold-tin, eutectic solder preform or conductive silver epoxy.

Eutectic Die Attachment Using Hot Gas Die Bonder:

An 80/20, gold tin eutectic solder perform is recommended with a work surface temperature of 255°C and a tool tip temperature of 220°C. When the hot gas is applied, the temperature at the tool tip should be approximately 290°C. The chip should not be exposed to temperature greater than 320°C for more than 10 seconds.

Eutectic Die Attachment Using Reflow Oven:

See Application Note M541, "Bonding and Handling Procedures for Chip Diode Devices". for more detailed handling and assembly instructions.


Epoxy Die Attachment:

A thin, controlled amount of electrically conductive silver epoxy should be applied at approximately 1-2 mils thickness to minimize ohmic and thermal resistances. A thin epoxy fillet should be visible around the perimeter of the chip after placement to ensure full area coverage. Cure conductive epoxy per manufacturer's schedule.

Wire Bonding:

0.001" diameter gold wire is recommended with a stage temperature of 150°C and minimal force. Ultrasonic energy should be adjusted to the minimum required. Automatic ball bonding can also be used.

Chip Outline (ODS-1419)

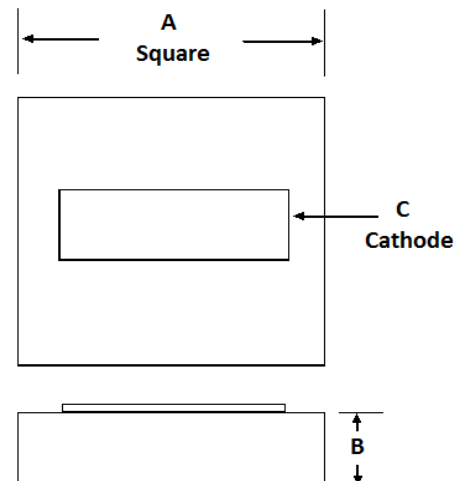

Chip Dimensions (ODS-1419)^{3,4}

| Dimension | Mils | mm |
|-----------|--------------|-----------------|
| A | 10.5 +/- 1.0 | 0.266 +/- 0.025 |
| B | 7 +/- 1.0 | 0.177 +/- 0.025 |
| C | 2.6 x 5.7 | 0.066 x 0.144 |

3. Topside metal (cathode contact) thickness: 10 microns Au.

4. Backside metal (anode contact) thickness: 0.1 micron Au.

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.