


Features

- 75 Ohm
- SMT unit
- RoHS* Compliant
- Pb Free

Description

- MAFL-010256-CB0AD0 is a surface mount Band-Pass Filter unit designed for MoCA applications.

Functional Schematic

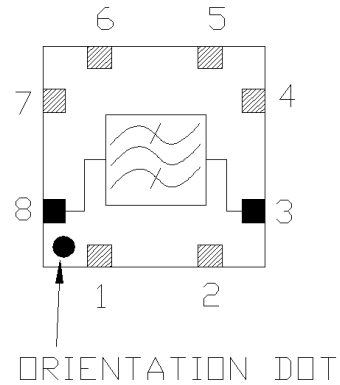

Pin Configuration

Function	Pin Number
Input Port	8
Band-Pass Port	3
Ground	1, 2, 4 - 7
Not connected	-

Ordering Information

Part Number	Package
MAFL-010256-CB0AD0	500pcs Reel
MAFL-010256-CB0ATB	Customer Evaluation Board

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$

Parameter	Unit	Typ	Min	Max
Insertion Loss 1125 - 1550 MHz	dB	1.7	-	2.0
Stopband Rejection 5 - 300 MHz	dB	53	50	-
300 - 800 MHz	dB	44	40	-
800 - 1002 MHz	dB	40	38	-
2250 - 3000 MHz	dB	35	33	-
Input Port Return Loss 1125 - 1200 MHz	dB	12.5	11	-
1200 - 1550 MHz	dB	11	10	-


* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Recommended Maximum Ratings^{1 2}

Parameter	Value
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C
DC Current	30mA
RF Power	250mW

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.



Outline Drawing: SM-173

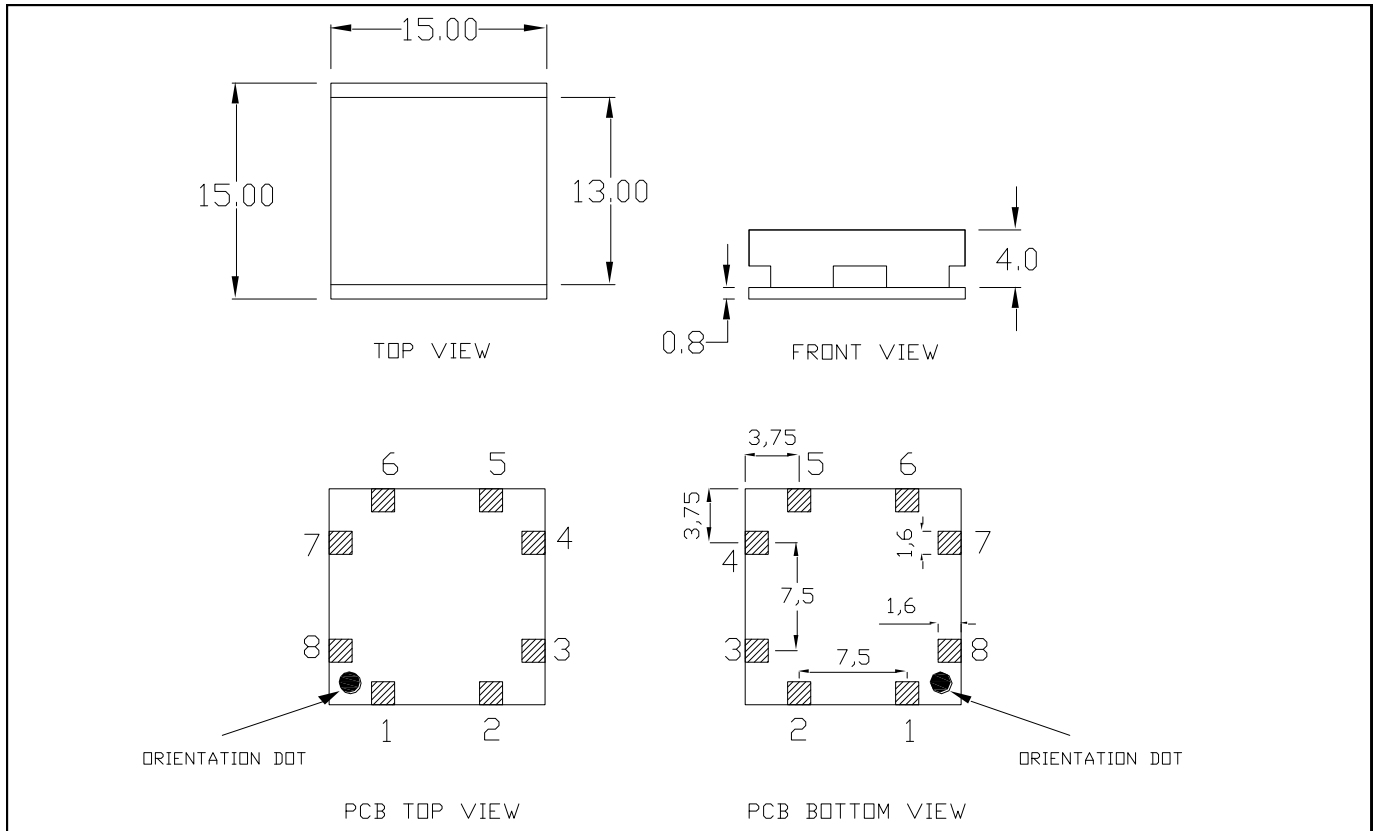

* Dimensions are millimeters ± 0.2 unless otherwise specified., Drawing not to scale.

Recommended PCB Configuration

- Track dimension = 1.1mm
- Gap dimension = 1.2mm
- It is not recommended to run tracks under the filter unless they are greater than 1.6mm below the base.
- Ground should be 1.6mm below the base of the filter
- Area directly under the filter should be free from copper
- RF shield should be kept a minimum of 6mm above the filter

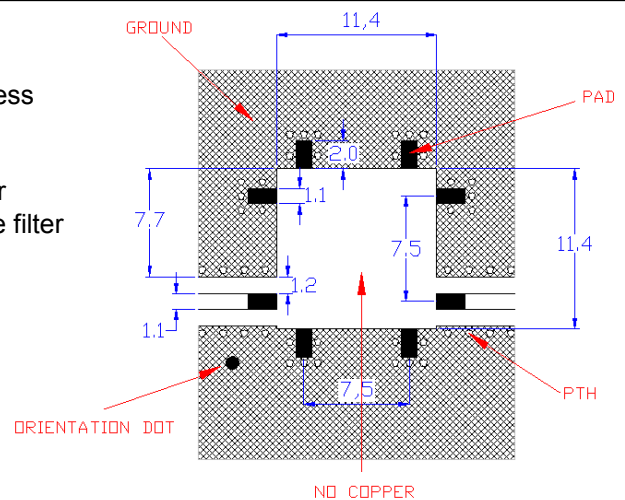


3 * Dimensions are millimeters ± 0.1 unless otherwise specified.


M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.


Typical Performance Curves at +25°C

Insertion Loss

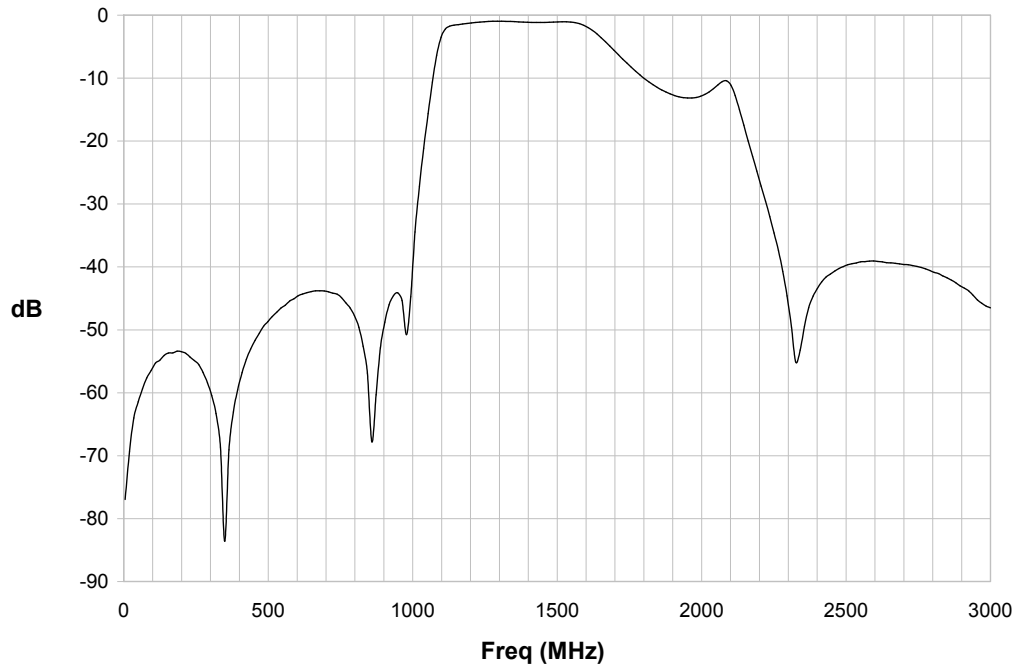

Return Loss

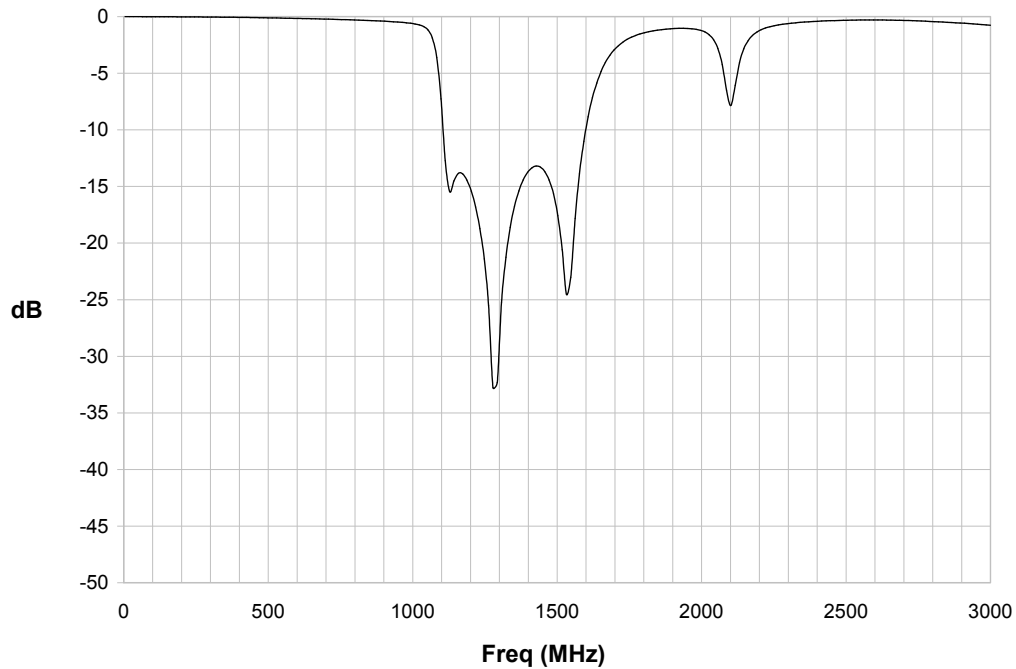

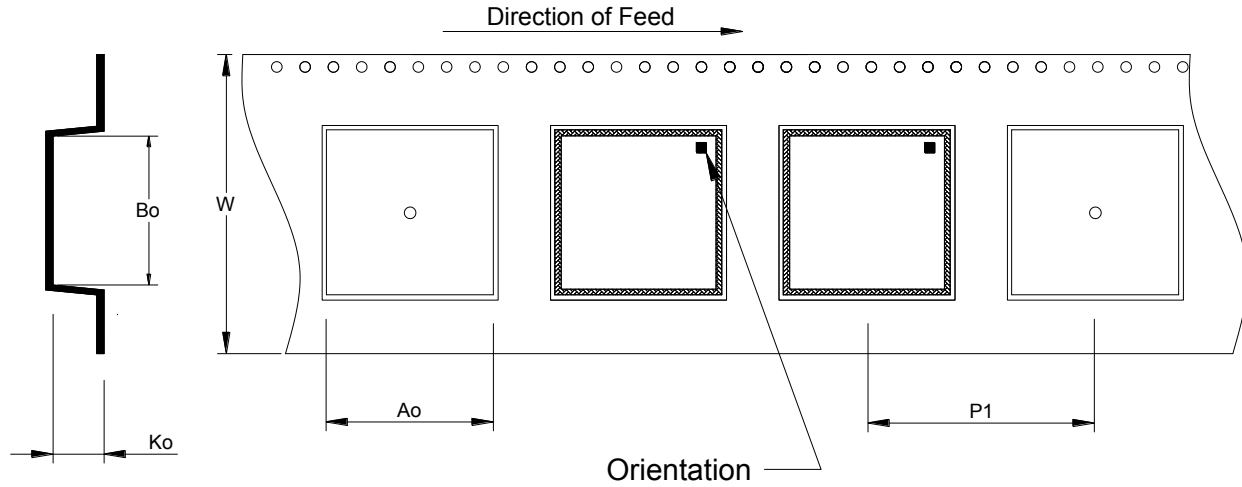

Item	Dimension
Ao	15.40mm +/- 0.1mm
Bo	15.40mm +/- 0.1mm
Ko	5.40mm +/- 0.1mm
W	32.00mm +/- 0.3mm
P1	20.00mm +/- 0.1mm