

# MAPR-001214-380M00



**Radar Pulsed Power Transistor**  
**380 WATTS, 1.2-1.4 GHz, 150us Pulse, 10% DUTY**

**Production**  
**02 Feb 2012**


## Features

- NPN Silicon Microwave Power Transistors
- Common Base Configuration
- Broadband Class C Operation
- High Efficiency Interdigitated Geometry
- Diffused Emitter Ballasting Resistors
- Gold Metallization System
- Internal Input and Output Impedance Matching
- Hermetic Metal/Ceramic Package
- RoHS Compliant

## Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	$V_{CES}$	88	V
Emitter-Base Voltage	$V_{EBO}$	3.0	V
Collector Current (Peak)	$I_C$	23.9	A
Power Dissipation @ +25°C	$P_{TOT}$	700	W
Storage Temperature	$T_{STG}$	-65 to +200	°C
Junction Temperature	$T_J$	200	°C

## Outline Drawing

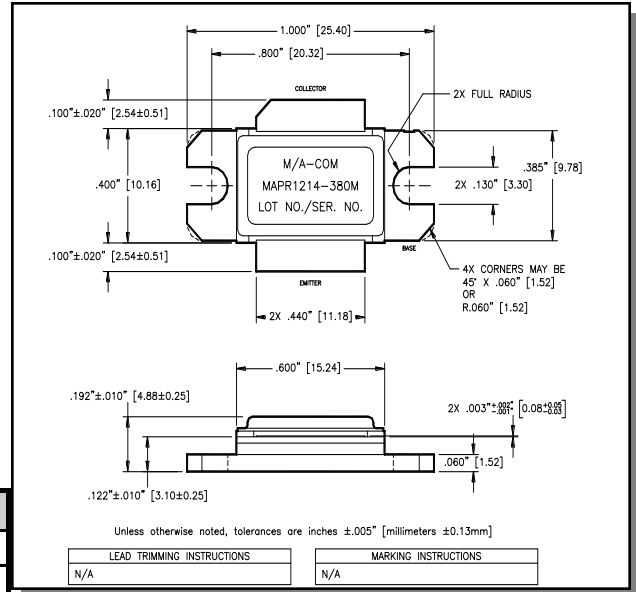

## Electrical Specifications: $T_C = 25 \pm 5^\circ\text{C}$ (ROOM AMBIENT)

Parameter	Test Conditions	Frequency	Symbol	Min	Max	Units
Collector-Emitter Breakdown Voltage	$I_C = 10\text{mA}$		$BV_{CES}$	90	-	V
Collector-Emitter Leakage Current	$V_{CE} = 44\text{V}$		$I_{CES}$	-	10	mA
Thermal Resistance	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	$R_{TH(JC)}$	-	0.25	°C/W
Output Power	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	$P_O$	380	-	W
Power Gain	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	$G_P$	8.8	-	dB
Gain Flatness	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	$\Delta G_P$	-	1	dB
Droop	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	Droop	-	0.6	dB
Collector Efficiency	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	$\eta_C$	45	-	%
Input Return Loss	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	RL	-	-9	dB
Load Mismatch Tolerance	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	VSWR-T	-	2:1	-
Load Mismatch Stability	$V_{CC} = 44\text{V}$ , $P_{in} = 50\text{W}$	$F = 1.2, 1.3, 1.4\text{ GHz}$	VSWR-S	-	1.5:1	-

1

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.


• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


### Typical RF Performance

Freq. (GHz)	Pin (W)	Pout (W)	Gain (dB)	ΔGain (dB)	Eff (%)	RL (dB)	Droop (dB)	VSWR-S 1.5:1	VSWR-T 2:01
1.2	50	458.5	9.65		50.75	-23.6	0.15	S	P
1.3	50	436.8	9.46		52.88	-16.8	-0.02	S	P
1.4	50	421.3	9.31	0.34	59.52	-15.2	-0.01	S	P


### Gain vs. Frequency

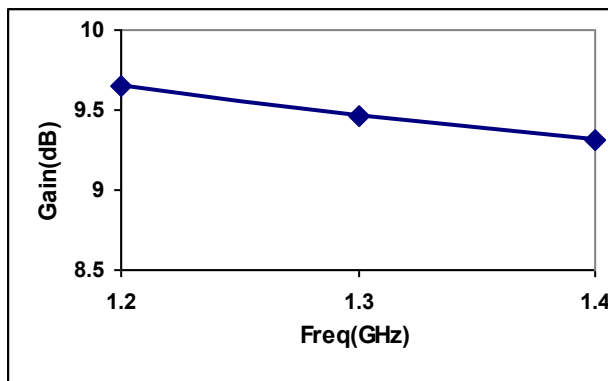

### Collector Efficiency vs. Frequency

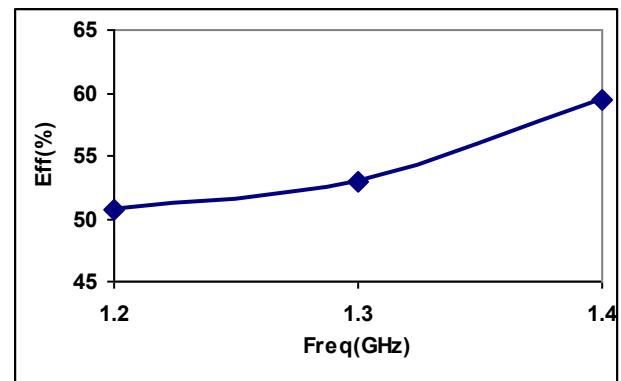


**RF Power Transfer Curve**  
**(Output Power Vs. Input Power)**

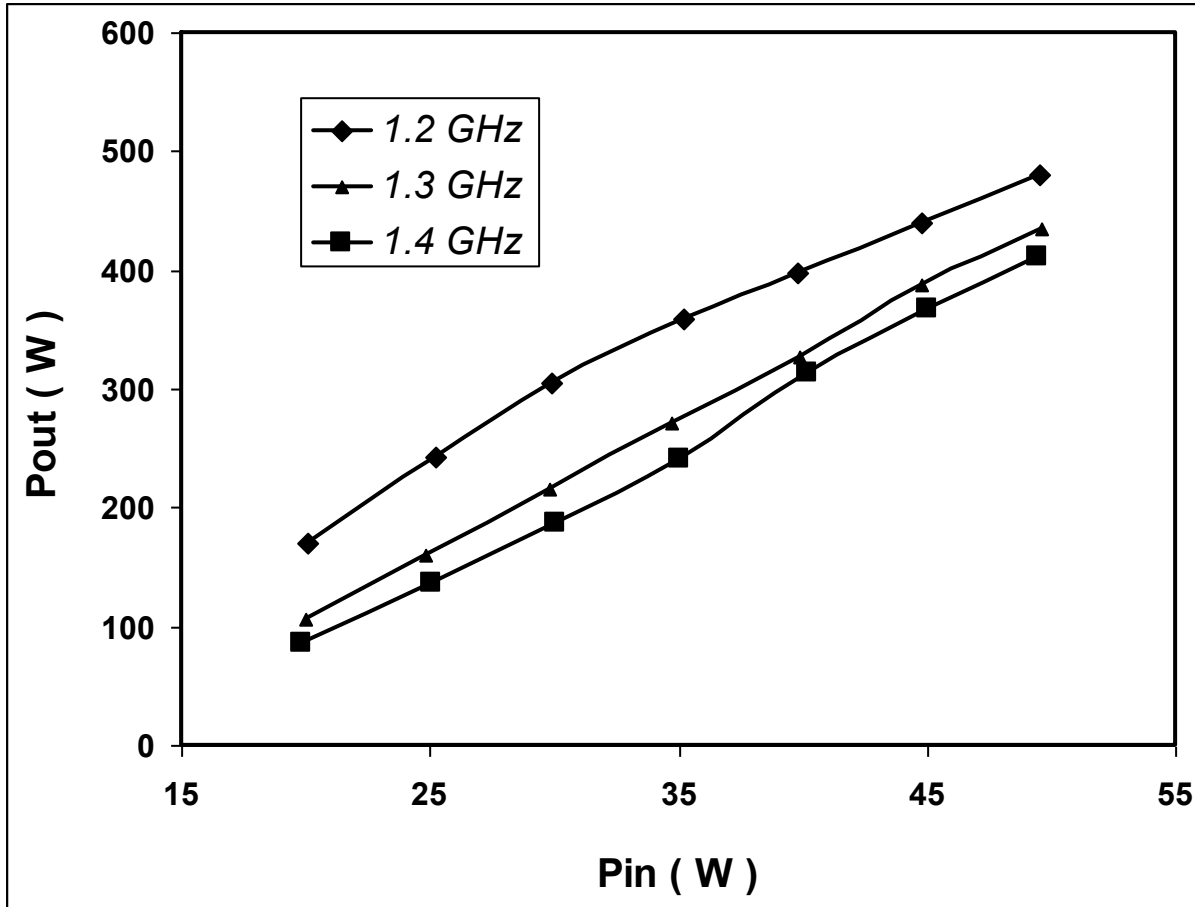

**Broadband Test Fixture Impedance**


F (MHz)	Z <sub>IF</sub> (Ω)	Z <sub>OF</sub> (Ω)
1200	1.3 - j1.89	1.08 - j1.83
1300	1.43 - j1.28	1.08 - j1.24
1400	1.51 - j0.73	1.1 - j0.75

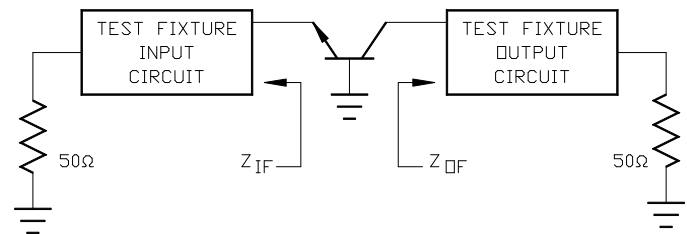


**Radar Pulsed Power Transistor**  
**380 WATTS, 1.2-1.4 GHz, 150us Pulse, 10% DUTY**

**Production**  
**02 Feb 2012**

## Test Fixture Circuit Dimensions

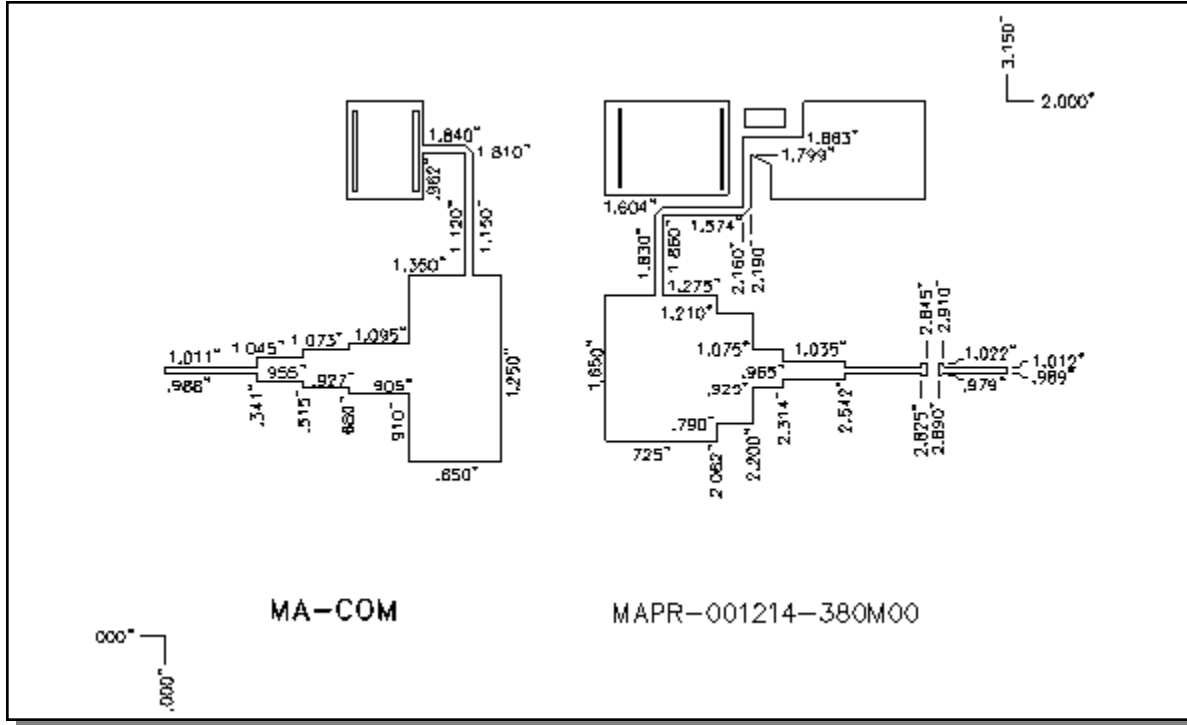

## Test Fixture Assembly

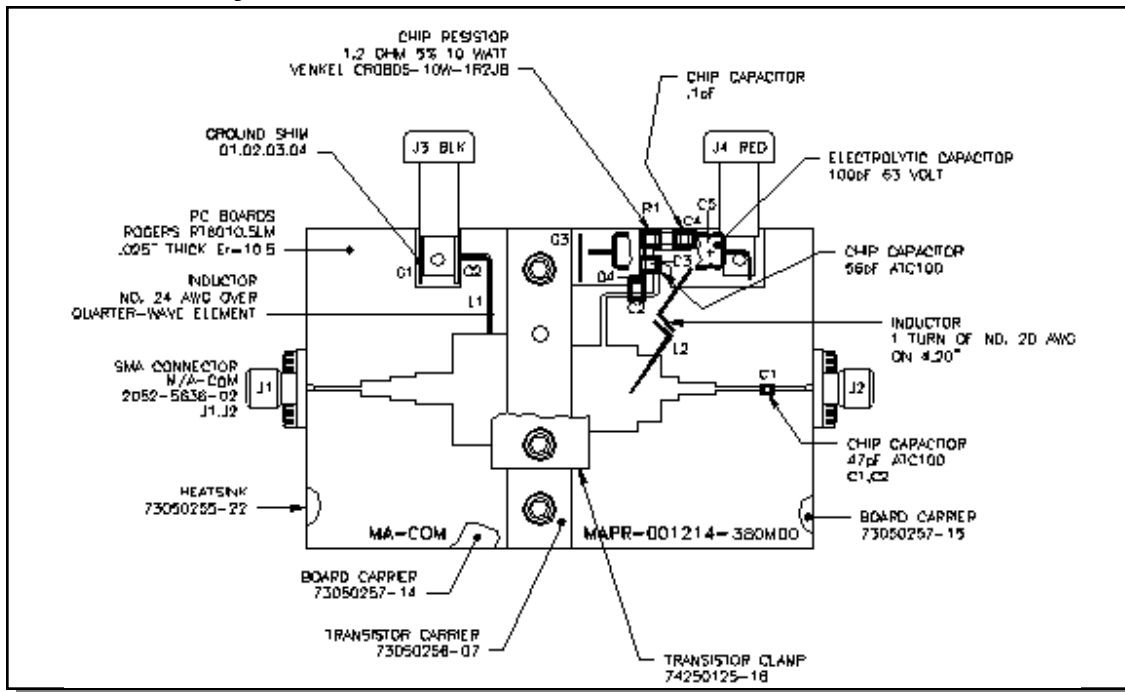

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

**North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
**India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588  
Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.