


Features

- Multi Junction Chip Design
- Low Noise
- Small Junction Capacitance



Consult Factory for other package styles.

Description

The MNM2xx Series of medium barrier Schottky diodes are metal semiconductor junction devices that have a typical short reverse recovery time. This allows their use at high microwave frequencies when the performance of the n-type may be reduced. The forward I-V of Schottky diodes is determined by the junction metal used. For every different metal selection there is a different forward voltage characteristic or “Barrier Height”. The devices are best suited for applications through 26 GHz and are ideally suited for use in mixers, detectors, doublers, and modulators.

Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Electrical Characteristics^{1,2}: T_A = +25°C

Model	Breakdown Voltage @ 10 μ A	Forward Voltage @ 1 mA	Junction Capacitance @ 0 V, 1 MHz	Series Resistance @ 5 mA	Tangential Signal Sensitivity
	(V _{BR})	(V _F)	(C _J)	(R _S)	(T _{SS})
	V	V	pF	Ω	dB
	Min.	Max.	Typ.	Typ.	Typ.
MNM200	3	0.40	0.14	20	52
MNM201			0.20		50
MNM202			0.12		48
MNM203			0.14		45
MNM204	4	0.425	0.15	20	52
MNM205			0.15		50
MNM206			0.12		48
MNM207			0.14		45
MNM208	4	0.450	0.14	20	52
MNM209			0.15		50
MNM210			0.12		48
MNM211	5		0.25		45
MNM212	5	0.475	0.21	20	52
MNM213			0.15		50
MNM214			0.12		48
MNM215			0.15		45


1

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.


Absolute Maximum Ratings @ +25°C

Parameters	Rating
Power Dissipation	250 mW Derate linearly to 0 @ +150°C
Operating Temperature	-55°C to +150°C
Storage Temperature	-65°C to +200°C

Forward Current vs. Forward Voltage

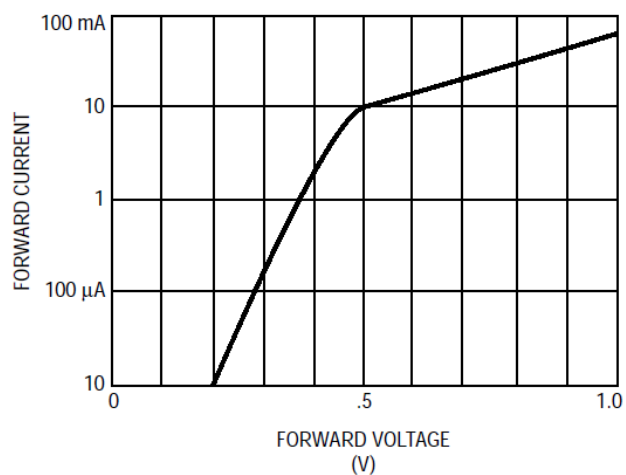

Outline (CS10)

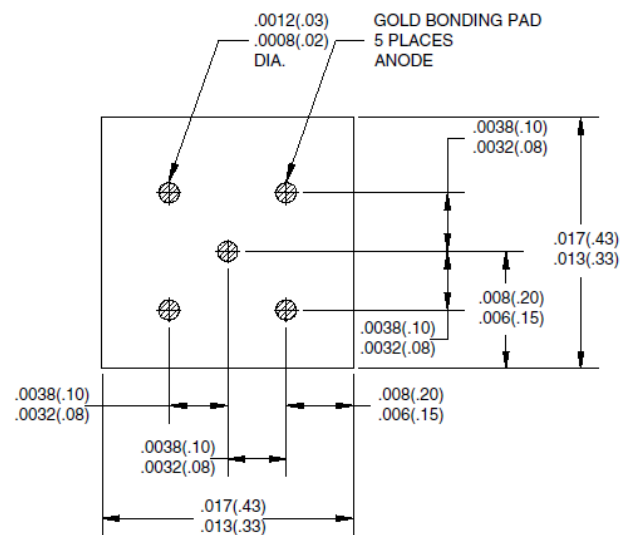

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.