


Features


- High Capacitance Ratios
- Linear Tuning Between 2 and 8 Volts
- Available over a Broad Range of Junction Capacitance
- Satisfies a Large Number of Broadband Applications thru the VHF Frequency Band
- RoHS* Compliant



Chip



SOT-23




SOD-323

Description

The SMV14xx Series tuning varactors are silicon abrupt junction devices. They are designed for RF and Microwave applications in VCO's, tunable filters, and matching networks. Available in a wide range of capacitance ratio values.



SOD-523



TO-92

Electrical Specifications: $T_C = +25^\circ\text{C}$

Part Number	Reverse Voltage	Total Capacitance ¹				Capacitance Ratio		Quality Factor
	V_B	C_T		C_T		C_R		Q
	$I_R = 10 \mu\text{A}$	$V_R = 1 \text{ V}, 1 \text{ MHz}$		$V_R = 2 \text{ V}, 1 \text{ MHz}$		$C_{T1} \text{ V} / C_{T10} \text{ V}$	$C_{T2} \text{ V} / C_{T10} \text{ V}$	$V_R = 2 \text{ V}, 1 \text{ MHz}$
	Min.	Min.	Max.	Min.	Max.	Min.	Min.	
SMV1401	12	440	660	—	—	14:1	—	200
SMV1402	12	—	—	45	69	—	10:1	200
SMV1403	12	—	—	140	210	—	10:1	200
SMV1404	12	—	—	96	144	—	10:1	200
SMV1405	12	—	—	200	300	—	10:1	200
SMV1406	12	—	—	80	120	—	10:1	200
SMV1407	12	—	—	54	82	—	10:1	200
SMV1408	12	—	—	37	57	—	10:1	200
SMV1409	12	—	—	26	40	—	10:1	200
SMV1410	12	—	—	17	27	—	9.5:1	200
SMV1411	12	—	—	12	18	—	8.5:1	200
SMV1412	12	—	—	8	12	—	7.5:1	200

1. C_T value given in chip form and will vary depending upon the desired packaging type.

Absolute Maximum Ratings





Parameter	Absolute Maximum
Power Dissipation	250 mW
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +200°C

ESD & Moisture Sensitivity Level Rating

As are all semiconductors, silicon hyperabrupt tuning varactor diode are susceptible to damage from ESD events. Proper ESD prevention procedures should be followed. The ESD rating for these devices is Class 0 (HBM).

1 * Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

Typical Performance Curves

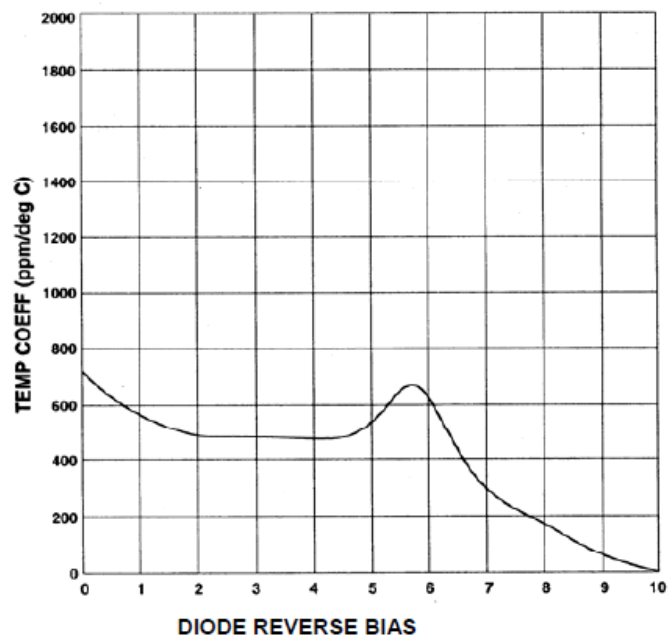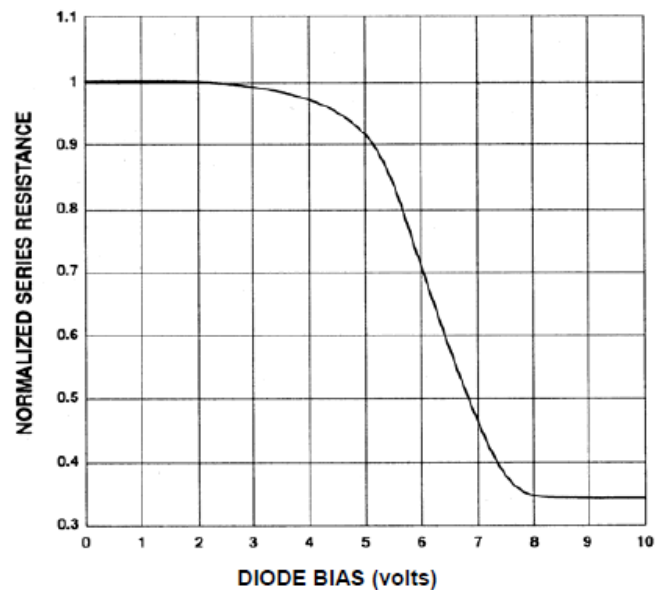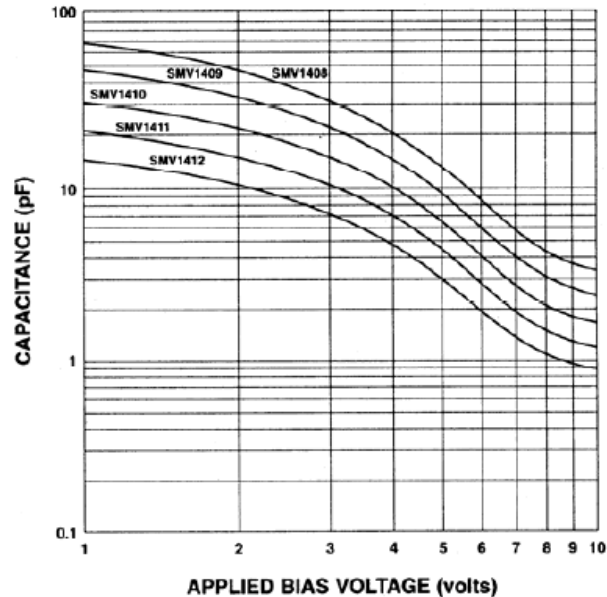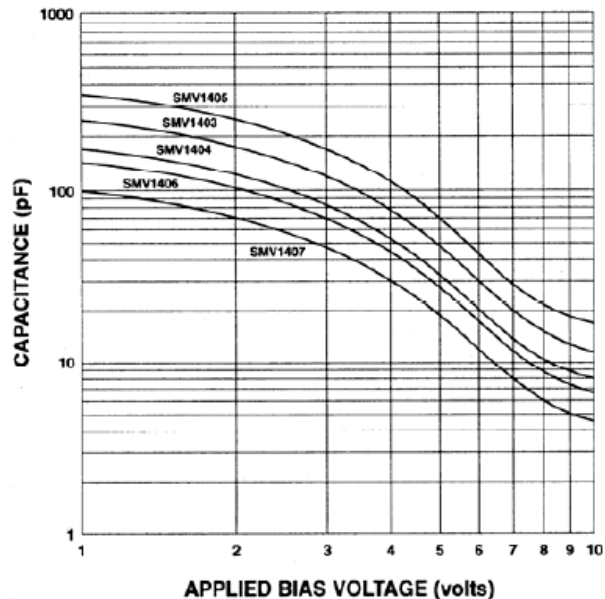

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.