

M21170 3.2 Gbps 288x288 Crosspoint Switch

Product Overview

M21170 – 3.2 Gbps 288x288 Asynchronous Crosspoint Switch

Built on three generations of industry-leading crosspoint switches, the M21170 is a 288x288 asynchronous non-blocking crosspoint switch which features 82,944 unique switching paths. It is ideally suited for high-speed data switching in the datacom, telecom, and video applications. Each switching path can operate independently at any data rate of up to 3.2 Gbps, allowing for multi-rate routing and switching in one single device. The M21170 includes per lane, programmable, input equalization and output de-emphasis, enabling optimal compensation for board trace losses and making this device ideal for designs in very large systems. To alleviate the power consumption and heat dissipation challenges in such systems, the output swing level for each lane may be set individually, providing flexibility and optimization of power dissipation without compromised performance. All unused output drivers, in addition to all paths not exercised within the device, are automatically disabled for maximum power savings. The device is configurable through standard 2-wire (I2C compatible) and 4-wire serial interfaces, as well as a 9-bit parallel interface.

Features	Benefits
<ul style="list-style-type: none"> Fully non-blocking array switch matrices 	Ultimate flexibility for switching and multicasting signals
<ul style="list-style-type: none"> Programmable per lane input equalization 	Allows control in removing deterministic jitter (ISI)
<ul style="list-style-type: none"> Programmable output de-emphasis and swing level 	Improves system jitter budget and drive reach
<ul style="list-style-type: none"> Protocol agnostic 	One device supports multiple applications
<ul style="list-style-type: none"> Support for video pathological patterns 	Robust solution for SDI applications
<ul style="list-style-type: none"> Individual level loss of signal (LOS) alarm and squelch 	Diagnostics for status
<ul style="list-style-type: none"> DC and AC coupling support at input and output 	Flexible support for both AC and DC coupled design configurations
<ul style="list-style-type: none"> Power-on reset feature 	Automatically defaults all register settings to a known state during power up
<ul style="list-style-type: none"> Junction temperature monitoring 	Automatically prevents thermal damages to the device
<ul style="list-style-type: none"> Programmable per lane power-down and standby mode 	Provides additional power management efficiency
<ul style="list-style-type: none"> 2-wire I²C, 4-wire SPI, and 9-bit data parallel interface registers 	Flexible and complete control for configuration
<ul style="list-style-type: none"> 1.2V core power supply operation / 1.2V or 1.8V output optional / 1.2V or 1.8V or 2.5V input optional supply 	Standard power supply supported
<ul style="list-style-type: none"> JTAG boundary scan 	Improves manufacturing yield for configuration



Fig. 1 - M21170 Device Architecture

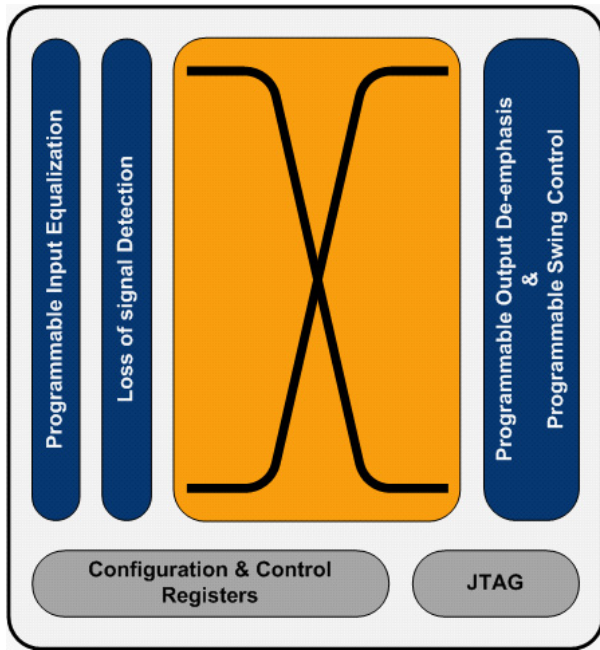


Fig. 2 - Routing Switcher Application Diagram


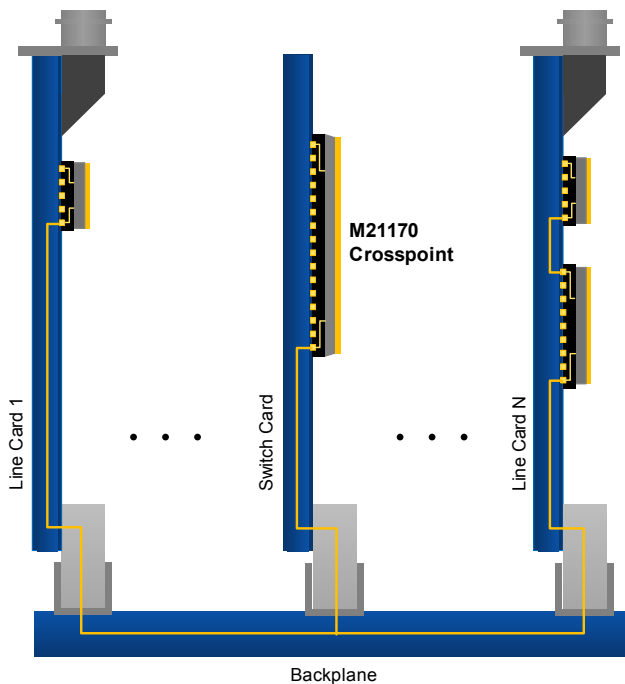


Fig. 3 - 3.2 Gbps Equalized After 40" FR4 Trace

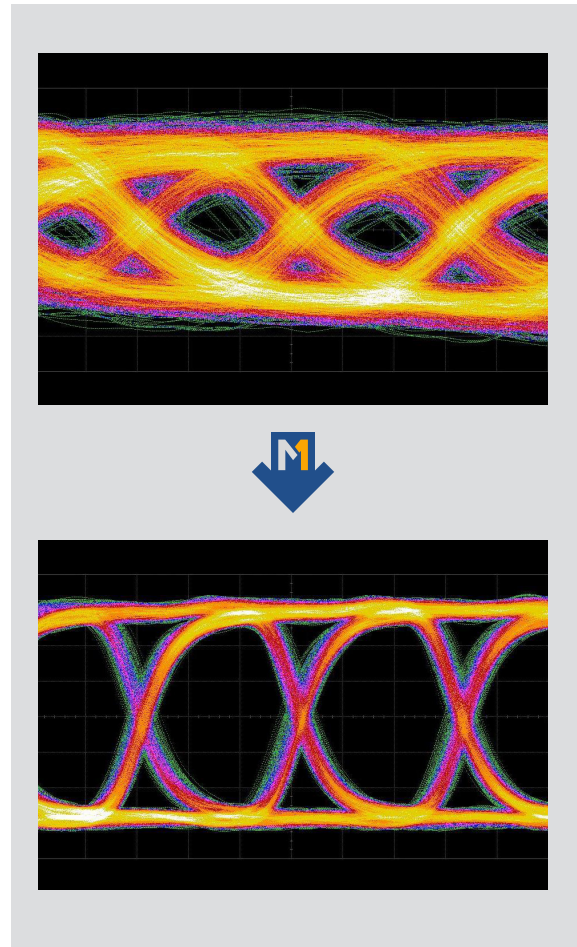

Product Features

Applications

- Digital video switchers/routers
- DWDM routers
- Backplane switching and signal conditioning

Package (RoHS Compliant)

- M21170: 50 mm, 2389 ball FCBGA

For more product information, please visit www.mindspeed.com

www.mindspeed.com/salesoffices
 General Information: (949) 579-3000
 Headquarters – Newport Beach
 4000 MacArthur Blvd., East Tower
 Newport Beach, CA 92660-3007
 M21170-BRF-001-A

© 2010 Mindspeed Technologies, Inc. All rights reserved. Mindspeed and the Mindspeed logo are trademarks of Mindspeed Technologies. All other trademarks are the property of their respective owners. Although Mindspeed Technologies strives for accuracy in all its publications, this material may contain errors or omissions and is subject to change without notice. This material is provided as is and without any express or implied warranties, including merchantability, fitness for a particular purpose and non-infringement. Mindspeed Technologies shall not be liable for any special, indirect, incidental or consequential damages as a result of its use.

MINDSPEED
 BUILD IT FIRST®