

## Features



- Surface Mount
- 1:4 Impedance Ratio
- CT on Secondary
- Available on Tape & Reel

## Description

The MABAES0031 is a 1:4 RF flux coupled step-up transformer. This transformer is offered in a SM-138 surface mount package.

Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching.

## Functional Schematic

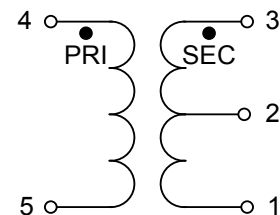

## Pin Configuration

Pin #	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Primary

## Electrical Specifications: Freq. = 1 - 650 MHz, $T_A = 25^\circ\text{C}$ , $Z_0 = 50 \Omega$ , $P_{in} = 0 \text{ dBm}$

Parameter	Conditions	Units	Min.	Typ.	Max.
Impedance Ratio	—	ratio	—	1:4	—
Insertion Loss ( $f_L - f_U$ )	10 - 200 MHz	dB	—	0.7	1.0
	1 - 450 MHz			1.5	2.0
Amplitude Unbalance	10 - 200 MHz	dB	—	0.12	0.25
Phase Unbalance	10 - 200 MHz	°	—	1	2.0
	1 - 500 MHz			3	5.0
	500 - 650 MHz			7	10.0

## Ordering Information

Part Number	Description
MABAES0031	2000 piece reel


## Absolute Maximum Ratings<sup>1</sup>

Parameter	Absolute Maximum
RF Input Power	250 mW
DC Current	200 mA
Operating & Storage Temperature	-40°C to +85°C


1. Operation of this device above any one of these parameters may cause permanent damage.

## Typical Performance Curves @ +25°C


**Insertion Loss (Primary to Secondary Dot)**

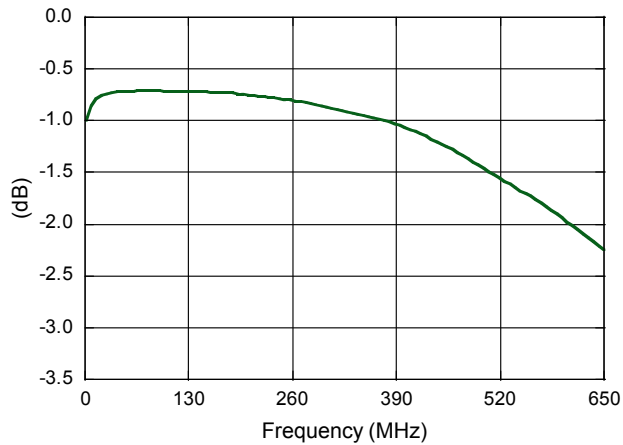


**Insertion Loss (Primary to Secondary)**

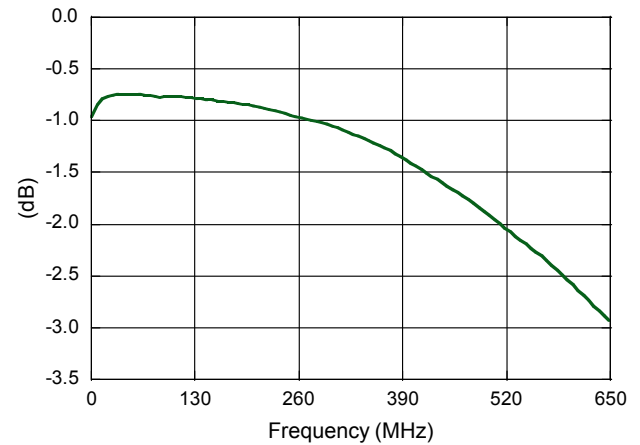

**Amplitude Unbalance**

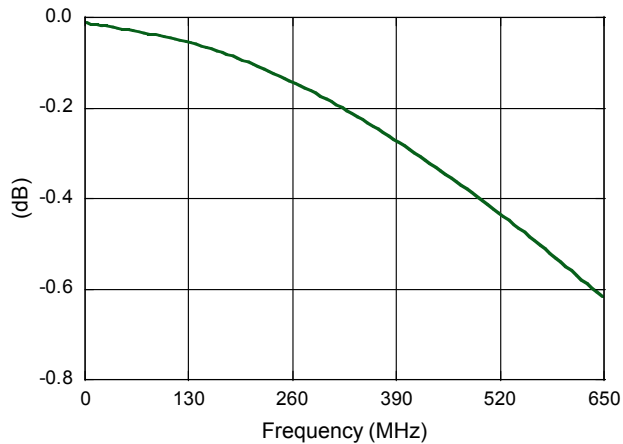


**Phase Unbalance**

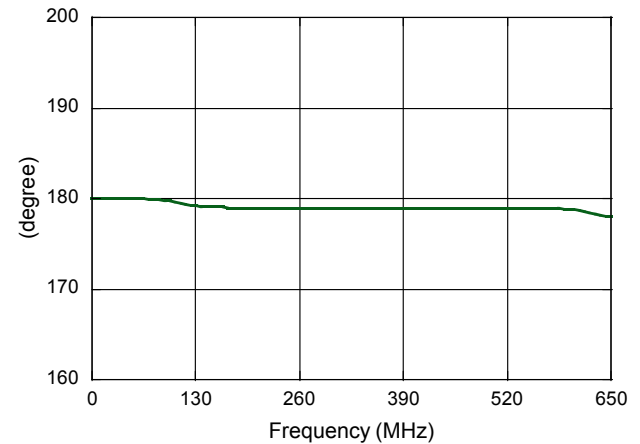

All measurements performed on Hewlett Packard 8753D Network Analyzer (201 sample points, linear scale) in a 50 Ω coplanar waveguide environment.

## Lead-Free Outline Drawing (SM-138)

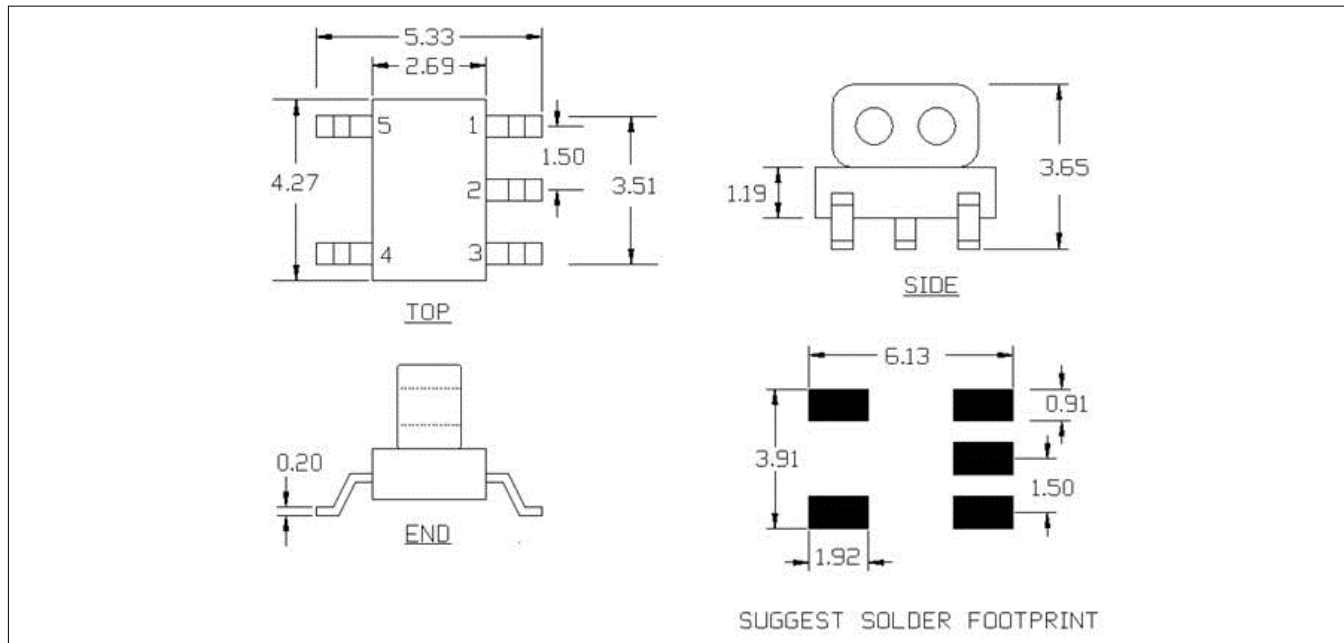

Dimensions in mm.  
Tolerance:  $\pm 0.2$  mm unless otherwise noted.  
Model number and lot code are printed on the reel.

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.