

MoCA Low Pass Filter 5 - 1550 MHz


Rev. V4

Features


- 75 Ω
- Surface Mount Package
- RoHS* Compliant & Lead Free
- MoCA Application

Description

The MAFL-009906-CL0AD0 is a surface mount low pass filter unit designed for MoCA applications.

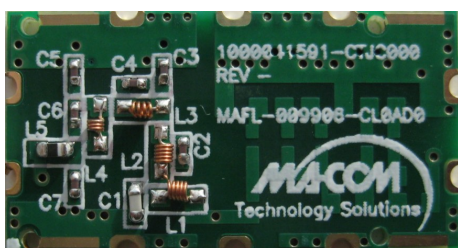

Functional Schematic

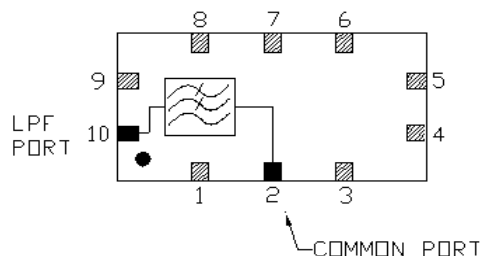

Pin Configuration

Pin #	Function
1, 3 - 9	Ground
2	Common Port (Input)
10	Low Pass Port (Output)

Electrical Specifications: Freq. = 5 - 1550 MHz, $Z_0 = 75 \Omega$, $T_A = 25^\circ\text{C}$

Parameter	Freq. Test Conditions (MHz)	Units	Min.	Typ.	Max.
Insertion Loss (Common to Low)	5 - 42 MHz	dB	—	0.05	0.15
	42 - 860 MHz			0.6	0.8
	860 - 1002 MHz			1.5	1.7
Rejection (Common to Low)	1130 - 1550 MHz	dB	30	32	—
Return Loss (Common Port)	5 - 600 MHz	dB	13	15	—
	600 - 950 MHz		11	13	
	950 - 1002 MHz		12	14	
Voltage Transient (Common Port)	5 - 1550	V	—	—	200

Ordering Information

Parameter	Package
MAFL-009906-CL0AD0	500 piece reel

Absolute Maximum Ratings^{1,2}


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Transient Voltage	200 V
Operating & Storage Temperature	-40°C to +85°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.


* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Typical Performance Curves

Low Pass Insertion Loss


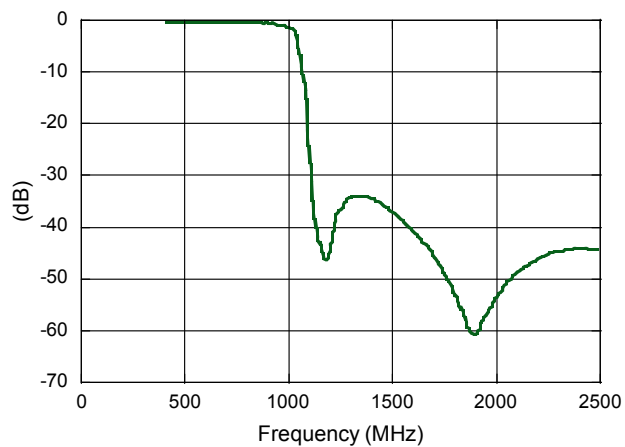


Common Port Return Loss

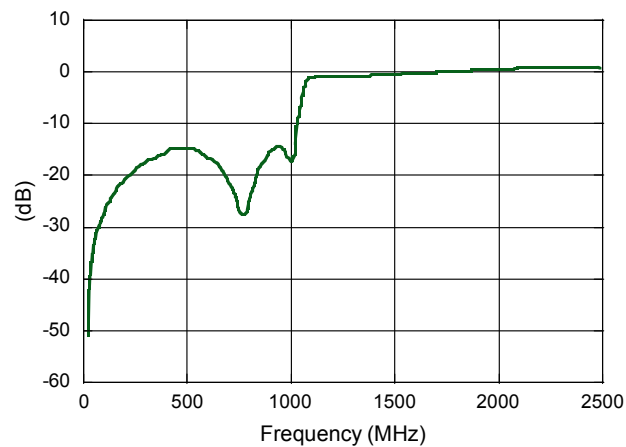

PCB Finish Specification


- Track dimension = 1.15 mm
- Gap dimension = 1.3 mm
- Ground should be 1.6 mm below the base of the filter
- RF shield should be kept a minimum of 6 mm above the filter

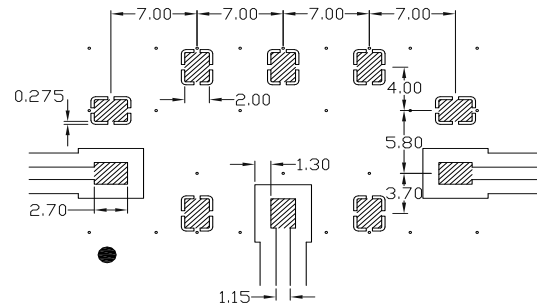


Electroless Nickel/ Immersion Gold 0.05 - 0.1 μ M
Gold over 3 - 5 μ M Nickel

Dimensions in mm. Tolerance: .x \pm 0.1, .xx \pm 0.05 unless otherwise noted


Recommended PCB Configuration

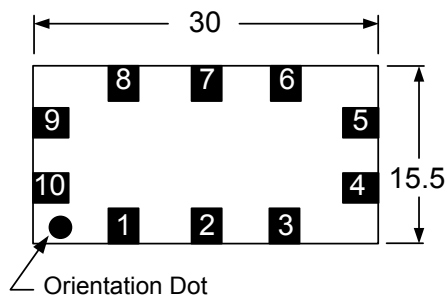

Top View




Side View

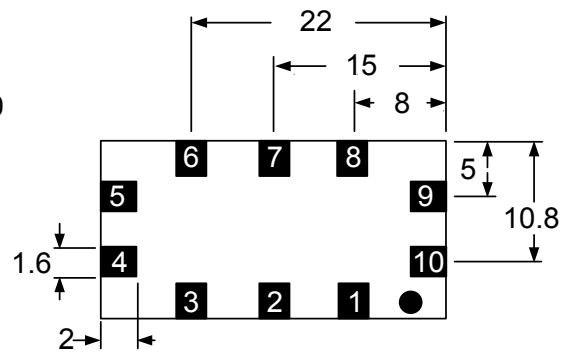

Bottom View

Dimensions in mm. Tolerance: .x \pm 0.1, .xx \pm 0.05 unless otherwise noted

Packaging

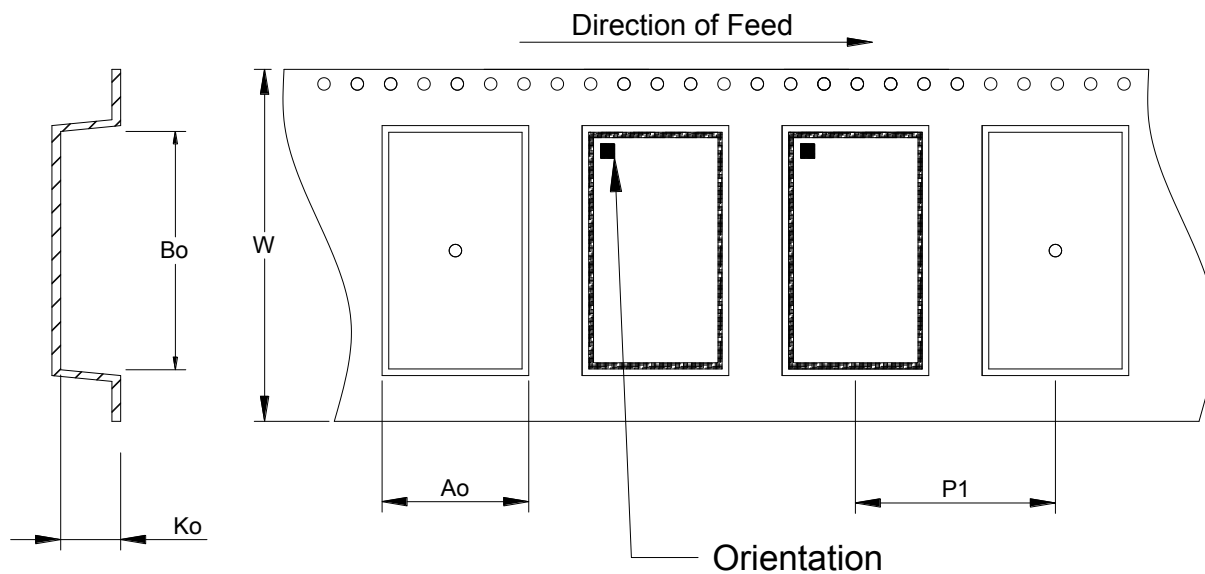

Dimensions

Item	Dimension
Ao	15.80 mm +/- 0.1 mm
Bo	30.30 mm +/- 0.1 mm
Ko	3.40 mm +/- 0.1 mm
W	44.00 mm +/- 0.3 mm
P1	24.00 mm +/- 0.1 mm

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.