

### Features

- Ultra-Low Phase Noise
- Variable Input Frequency 75 - 250 MHz
- Variable Input Power from 18 - 24 dBm
- Output Harmonics to 6 GHz
- SMT580 Surface Mount & SMA800 Packages
- No Bias or Tuning Required
- RoHS\* Compliant


 SMA800  
hermetic


SMT580

### Description

The MLPNC-7100S1 is a monolithic non-linear-transmission-line (NLTL) comb generator which offers outstanding phase noise performance. This high performance comb generator operates over specified ranges of input frequency/power.

### Operating Parameters<sup>1</sup>

Parameter	Units	Recommended Input		
		Min.	Typ.	Max.
Frequency	MHz	75	100	250
Power	dBm	18	22	24

1. The model 7100S does not abruptly stop working at the recommended min and max Frequencies and Powers. The conversion efficiency drops outside recommended limits.

### Production Test Limits<sup>2</sup>

Input	Units	Output Harmonics		
		Up to 1 GHz	1 - 2 GHz	2 - 4 GHz
75 MHz, 22 dBm	dBm	> -30	> -15	> -24
100 MHz, 22 dBm	dBm	> -15	> -10	> -18
250 MHz, 22 dBm	dBm	> -3	> -7	> -19

2. These are the harmonic output test limits used for production screening.

### Absolute Maximum Ratings<sup>3,4</sup>

Parameter	Absolute Maximum
Input Power	27 dBm
Operating Temperature	-45°C to +85°C
Storage Temperature	-55°C to +125°C
Temperature Cycling	-55°C to +125°C

3. Exceeding any one or combination of these limits may cause permanent damage to this device.
4. MACOM does not recommend sustained operation near these survivability limits.


### Ordering Information

Part Number	Package
MLPNC-7100S1SMA800	ESD Box with Foam
MLPNC-7100S1SMT580	ESD Box with Foam


\* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

### Typical Performance Curves @ +25°C using SMA package:


**Harmonic Output, 75 MHz Input Frequency**

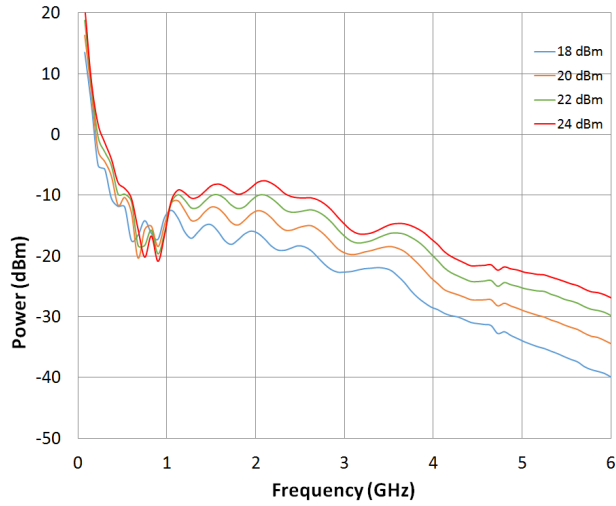


**Harmonic Output, 100 MHz Input Frequency**

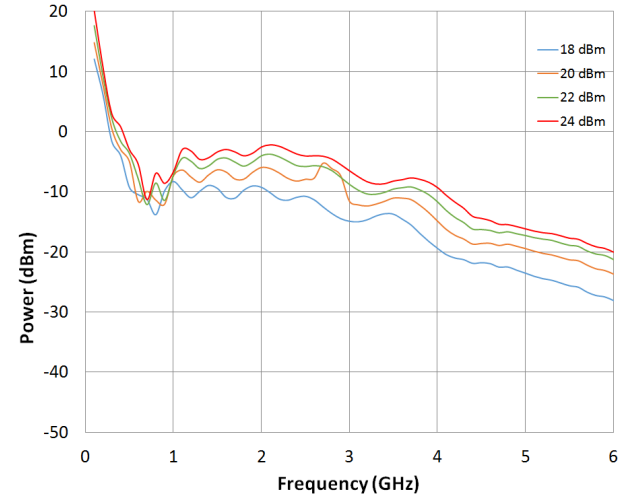

**Harmonic Output, 250 MHz Input Frequency**

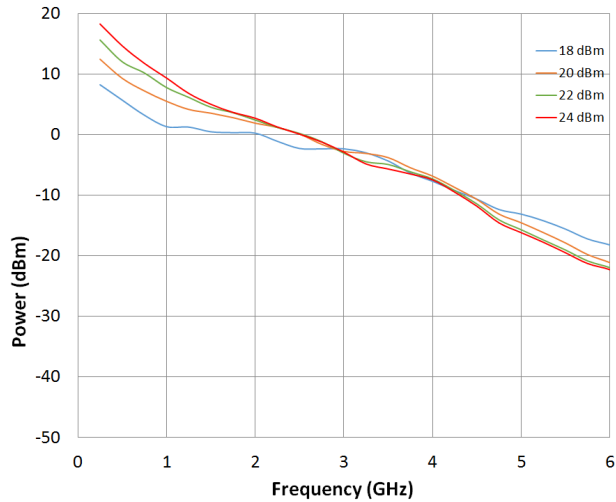


**Phase Noise @ 22 dBm, 100 MHz Input Frequency, 4 GHz Output Frequency**

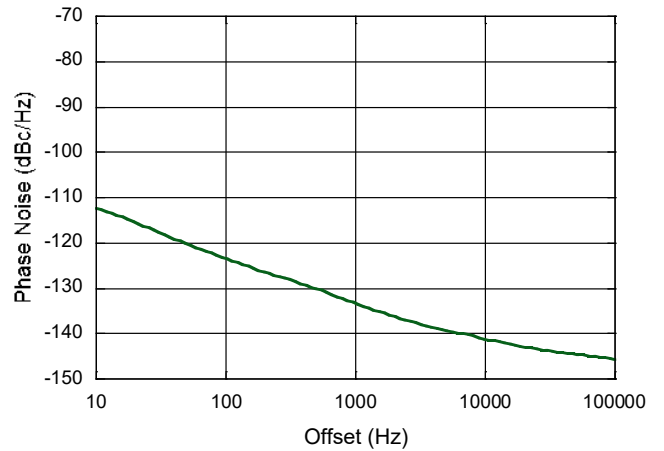


### Typical Performance Curves over temperature @ 75 MHz Input Frequency using SMA800 package:


**Harmonic Output, 18 dBm Input Power**

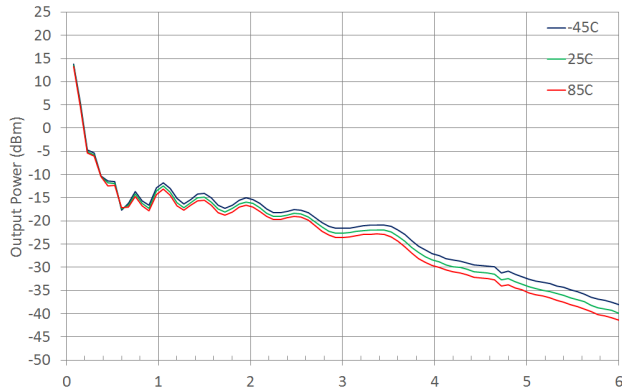

**Harmonic Output, 22 dBm Input Power**

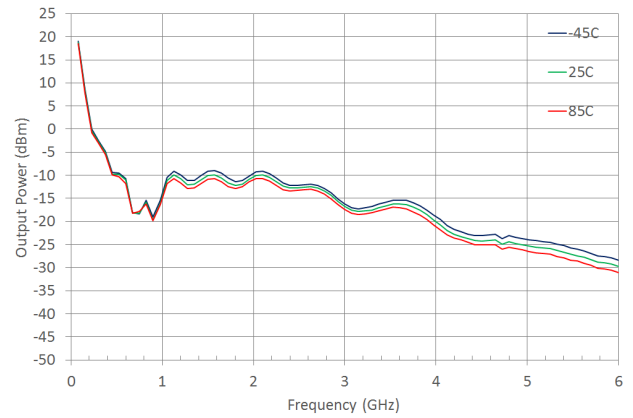


**Harmonic Output, 24 dBm Input Power**

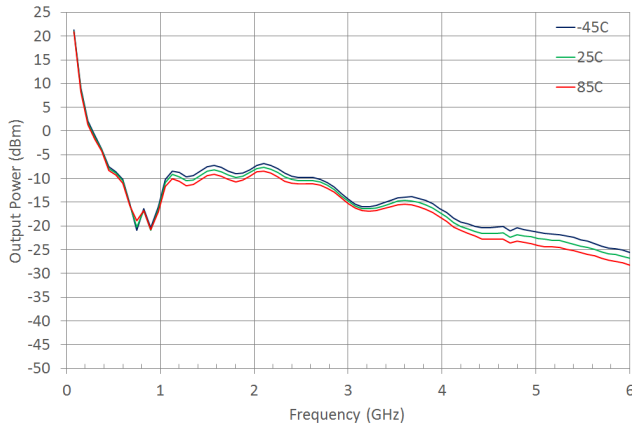


### Typical Performance Curves over temperature @ 100 MHz Input Frequency using SMA800 package:


**Harmonic Output, 18 dBm Input Power**

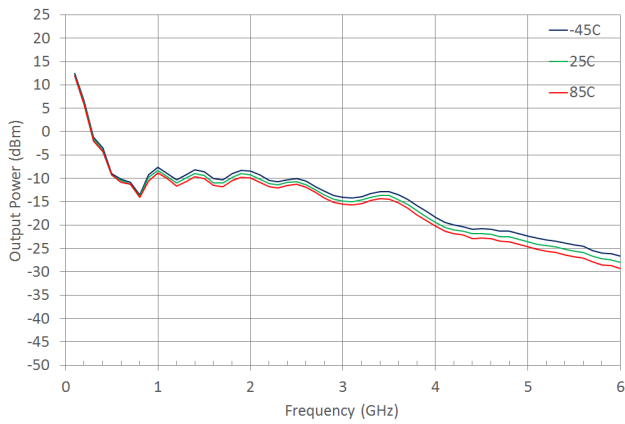

**Harmonic Output, 22 dBm Input Power**

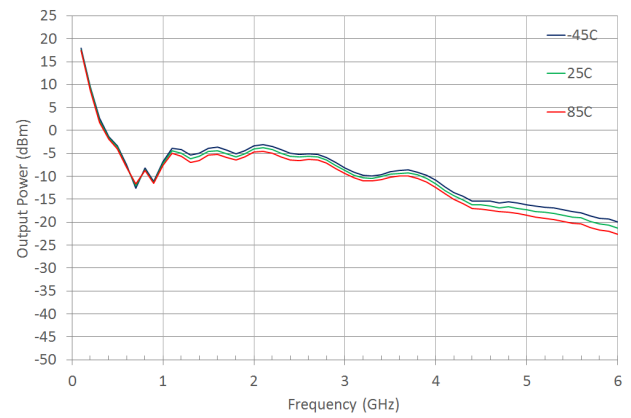


**Harmonic Output, 24 dBm Input Power**

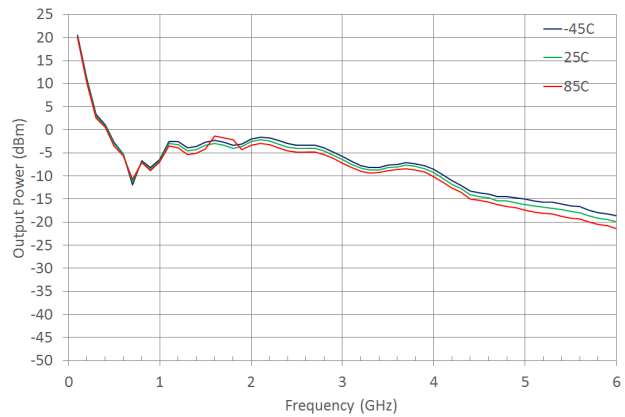


### Typical Performance Curves over temperature @ 250 MHz Input Frequency using SMA800 package:


**Harmonic Output, 18 dBm Input Power**

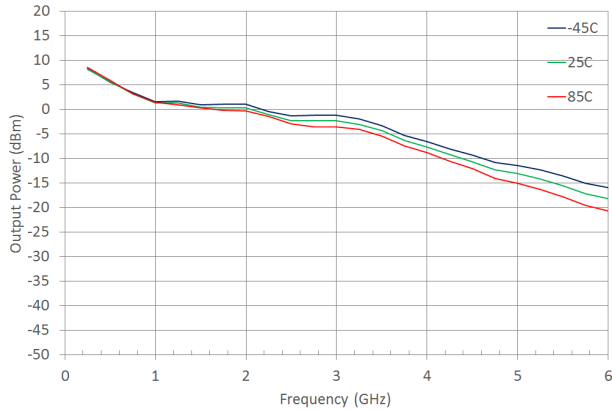

**Harmonic Output, 22 dBm Input Power**

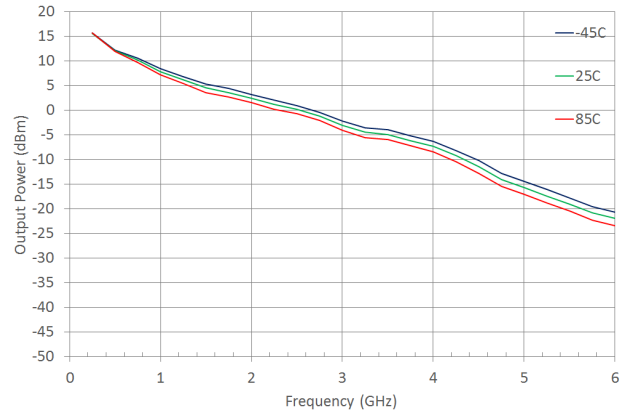

**Harmonic Output, 24 dBm Input Power**

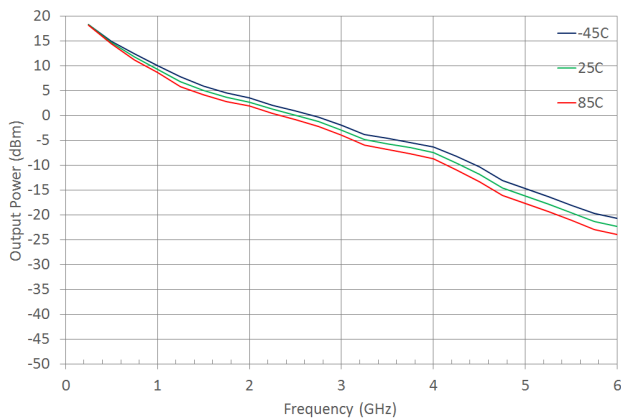


# MLPNC-7100S1



## NLTL Comb Generator

Rev. V5

Outline: SMT580

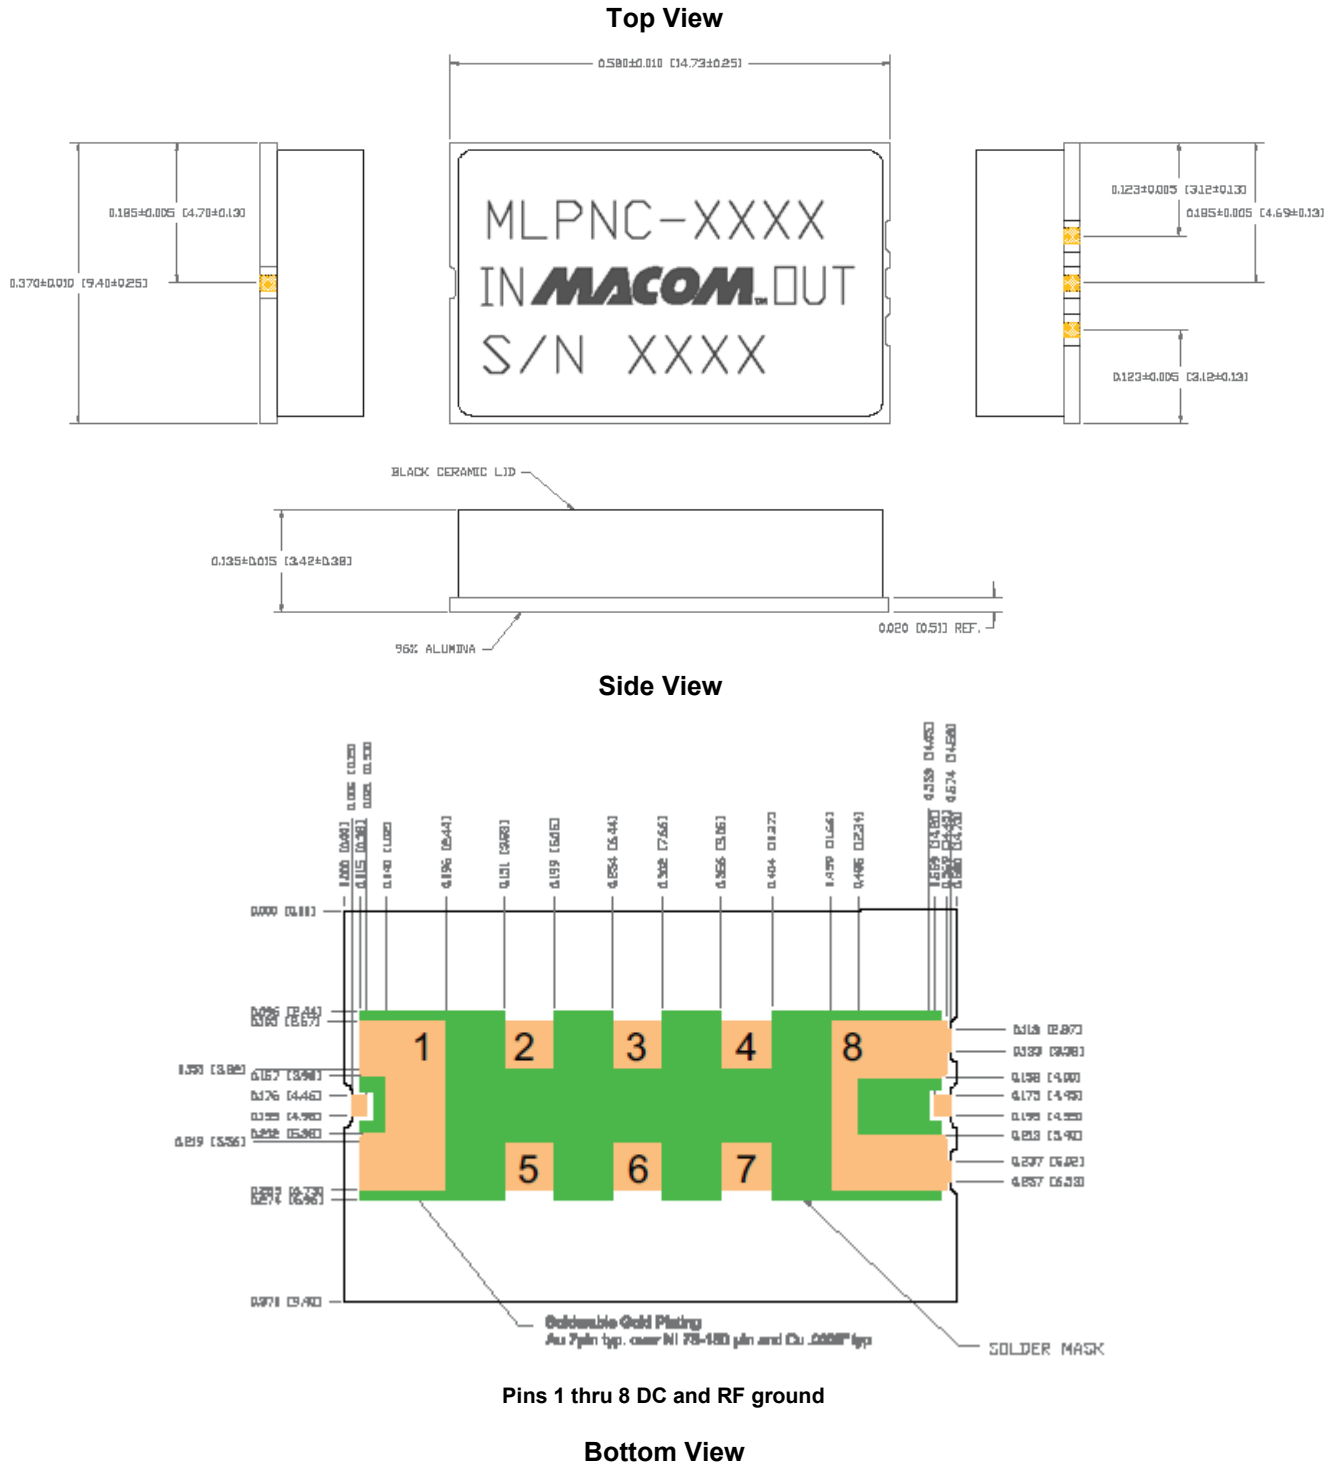

6 Dimensions in inches [mm]

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

For further information and support please visit:  
<https://www.macom.com/support>

DC-0010999


# MLPNC-7100S1



NLTL Comb Generator

Rev. V5

Outline: SMA800, hermetic

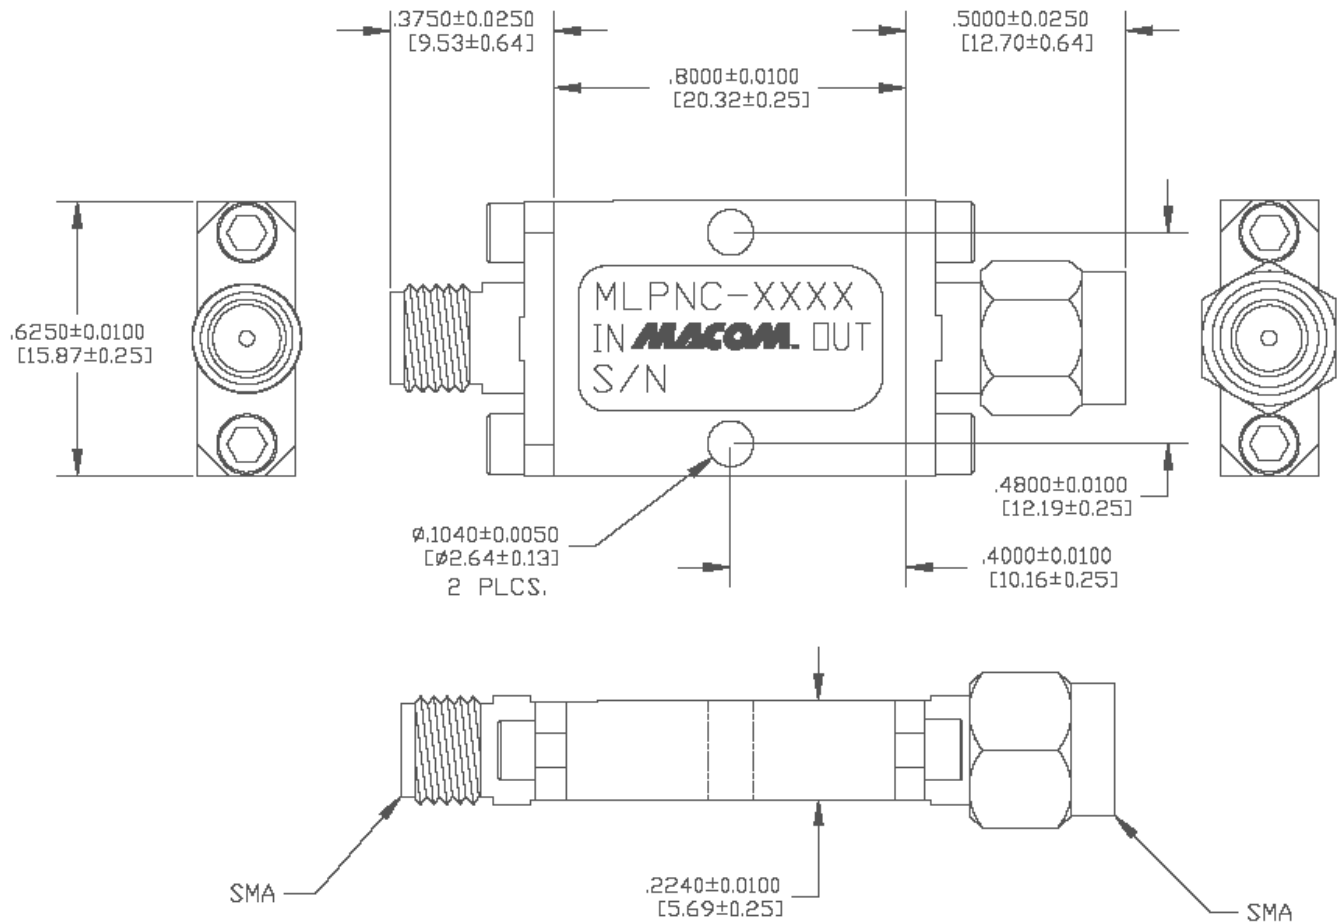

Dimensions in inches [mm]

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.